



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER	LENGTH "L" +/- .3" [7]
MRT1.5LH-L6	50	1.5" [38]	9.7" [246]
MRT2LH-L6	50	2" [51]	11.3" [287]
MRT4LH-L6	50	4" [102]	17.6" [447]
MRT6LH-L6	50	6" [152]	23.8" [604]

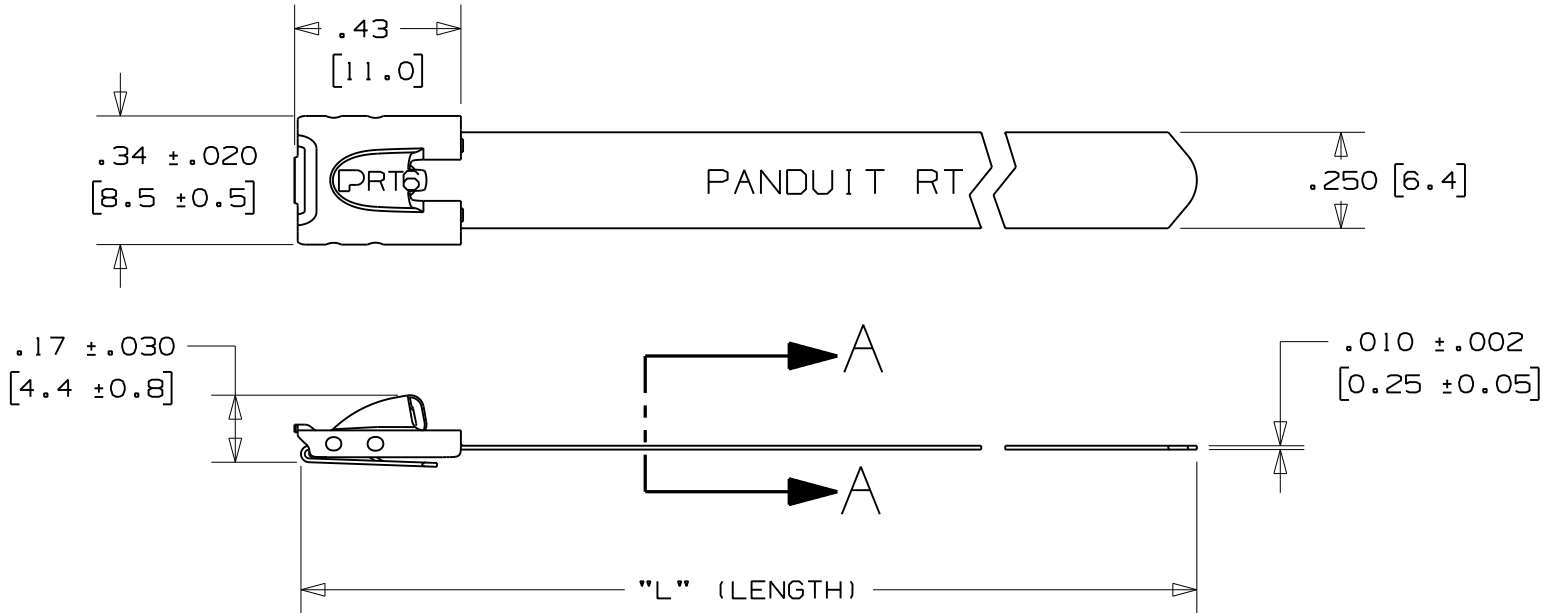

NOTES:


- 1.) APPLICATION TOOLS - MRT1LS & PTRT
- 2.) MINIMUM LOOP TENSILE STRENGTH - 225 LBS. (1000 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
- 3.) [] DENOTES DIMENSION IN MILLIMETERS
- 4.) TOLERANCES:
 $.XXX = \pm .010$ [.25]
 $.XX = \pm .02$ [.5]
 $.X = \pm .03$ [.8]
 ANGLES = $\pm 2^\circ$
- 5.) MATERIAL: 316 STAINLESS STEEL

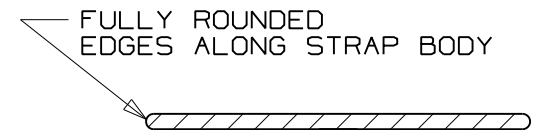

N41250BS_DC/04A

REV	DATE	BY	CHK	DESCRIPTION	ECN #	DRAWN BY	CHK'D	SCALE	DRAWING NO.
04A	2/09	JAMB	EJD	UPDATE DWG TO REFLECT CURRENT PRODUCTION PART. ADDED "PTRT" APPLICATION TOOL.					
03A	11/07	JAMB	EJD	ORIG.CAD FILE SPEC.& DWG.NO.WAS S41250_02 ADDED PART NO.MRT1.5LH-L6 TO PART TABLE					
02A	7/07	JMMR	EJD	APPLICATION TOOLS WERE MRT1 & PTR1					
01A	1/07	JAMB	EJD	REMOVED PARTS MRT8LH-L6 & MRT10LH-L6	SS00317				
						JAMB	EJD	2:1	N41250BS_DC

TM



TINLEY PARK, ILLINOIS

METAL TIE - LIGHT/HEAVY SERIES
RETAINED TENSION - 316 STAINLESS STEEL
CUSTOMER DRAWING