


■ = bestückt - *assemble*

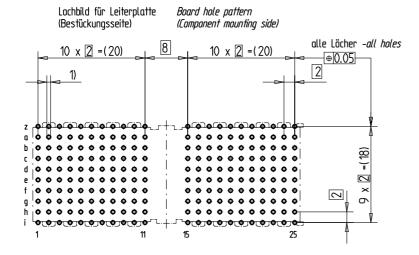

- 1) Ø 0,6±0.05 Durchmesser des metallisierten Loches Ø 0,6±0.05 Diameter af finished plated-through hole
 - \emptyset 0,7±0.02 Bohrungsdurchmesser des Loches

Ø 0,7±0,02 Diameter of drilled hole

Schichtaufbau im metallisierten Loch siehe Zeichnung 114406

Metal plating of plated-through hole see drawing 114406

Bedruckung siehe Zeichnung 284811 Marking see drawing 284811

Fehlende Masse und Angaben nach IEC 61076-4-101 Missina information and dimensions per IEC 61076-4-101

riissing intornation and allictisions per lee 01070-4-101			1
nsider protection memo from DIN 34	Information : Abschirmblech Reihe z+i montiert shieldings row z+i mounted	Tolerances All Dimensions in mm	Scale 2:1
	All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERM companies	Subject to modification without prior notice. Drawing will not be updated.	Designation ERmet-FS Federleiste D ERmet-Female Straight Type D
	before using. b 03.03.2008	■≣NI www.ERNI.com	124094
ပိ	Index Note	H:00065097.S7A	ERMD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ERNI Electronics:

124094