


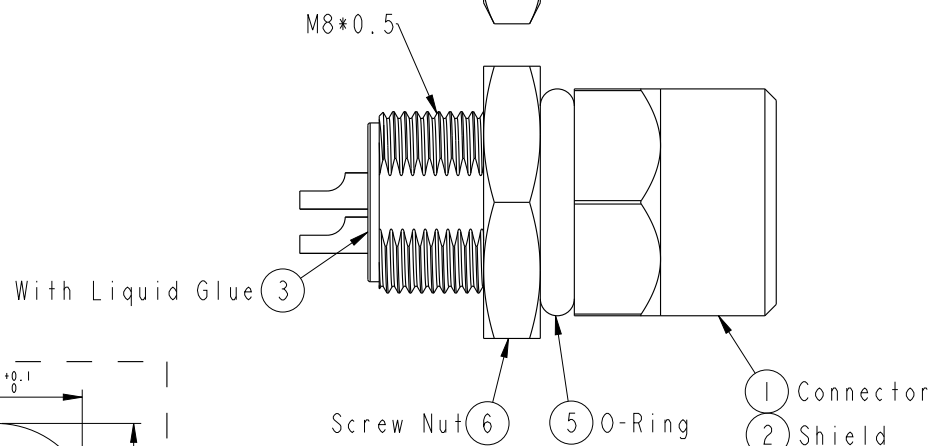


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C191918	2019/10/31	JC Chen	

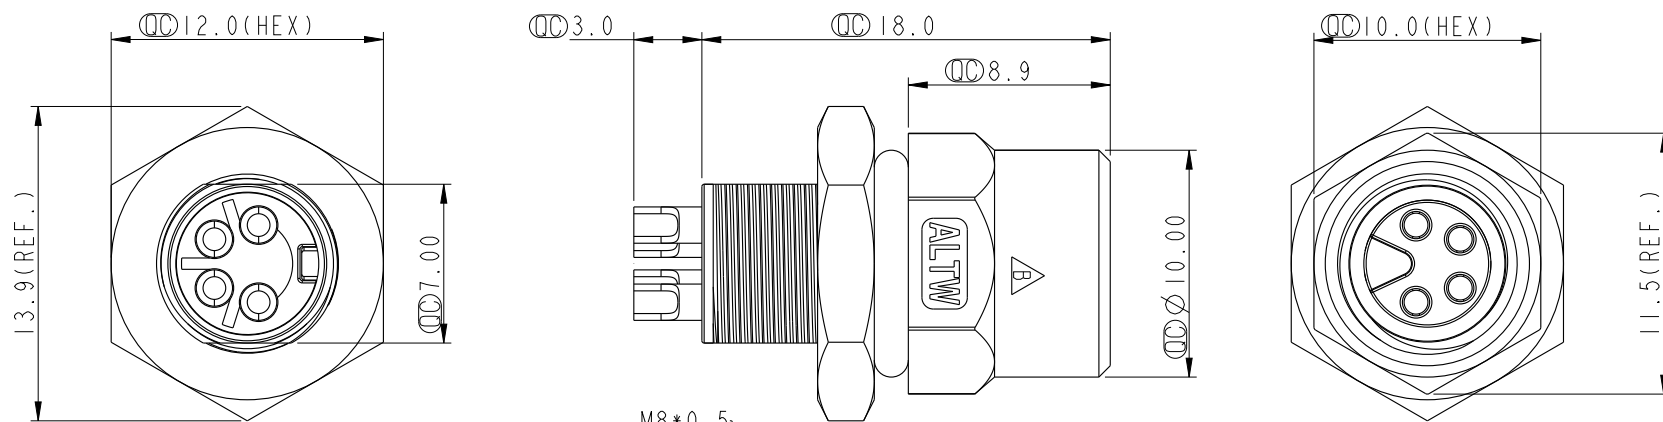

Pin Assignment
Front View



Recommended
Panel Cut-Out

Note:
*  Important Dimension.
* Waterproof Rate: IP67.
* Housing: Nylon+GF, Black.
* Female Pin: Copper Alloy, Gold Plated.
* Shield: Zinc Alloy, Nickel Plated.
* Screw Nut: Copper Alloy, Nickel Plated.
* O-Ring1: Viton, Green.
* O-Ring2: EPDM, Black.
* For Panel Thickness Max 4.5mm.
* Nut Torque: 4~6 kgf.cm.

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
		M8 4Pin Panel F Conn. F Pin		8A-04PFFS-SH7001		Mila		2014-02-10	
TOLERANCE		SCALE		DWG NO		CHECKED BY		DATE	
.X ±0.25		3:1		8A-04PFFS-SH7001		Jimmy		2014-02-10	
.XX ±0.1		SIZE		CUSTOMER		APPROVED BY		DATE	
.XXX ±0.05		A4		ALTW		Jerry		2014-02-10	
ANGLES ±1°		REV.							
		B							
		WC-REV.							
		A.5							
		 :Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司