



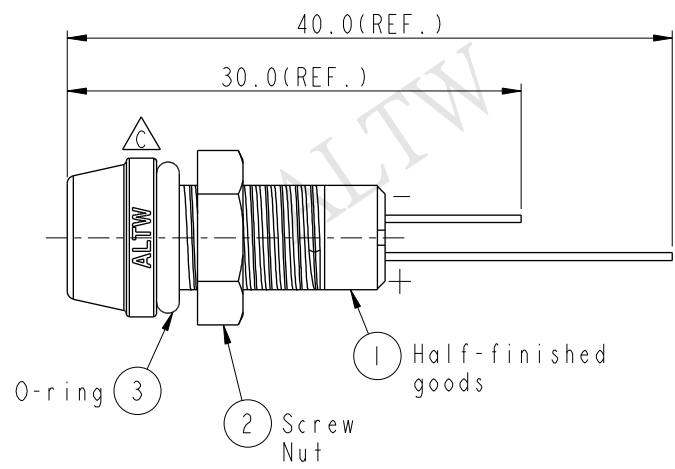
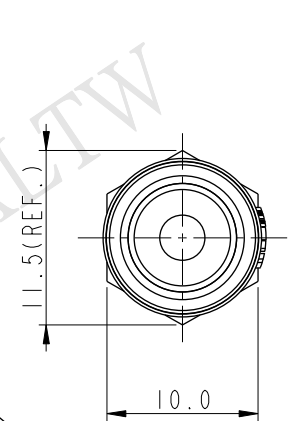


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-930477	2009/03/04	ZhaoRongFu	Add Waterproof Rate
C	LEN1650812	2016/05/24	Ruru	Change Logo




Recommended Panel Cut-Out

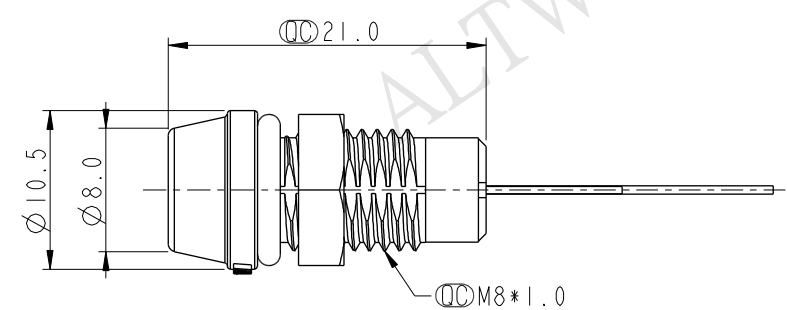

Liquid Glue

- Notes:
- * (C) Important Dimension To Check
 - * Waterproof Rate: IP67
 - * LED Holder: PC+ABS, Black
 - * LED: Ø3 mm, White (高亮度)
 - * O-ring: EPDM, Black
 - * Screw Nut: Nylon+GF
 - * Operating Voltage: DC 4V
 - * Operating Temperature: -40~+80°C
 - * For Panel Thickness 6.5mm Max.



UNIT: mm				TITLE Ø3mm Plastic LED ,White		ITEM NO L08-01WAAS-PR7001		DRAWN BY Ruru		DATE 2016-05-24	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 2:1		SIZE A4		DWG NO L08-01WAAS-PR7001		CHECKED BY Rita		DATE 2016-05-24	
REV. C		WC-REV. A.2		SHEET 1 OF 1		CUSTOMER ALTW		APPROVED BY Lisa		DATE 2016-05-24	
				QC: Inspection item						8 FMW10702-01-02A1	

Amphenol LTW
安費諾亮泰企業股份有限公司