


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 46496	06/17	GPF

PRODUCT DATA DRAWING

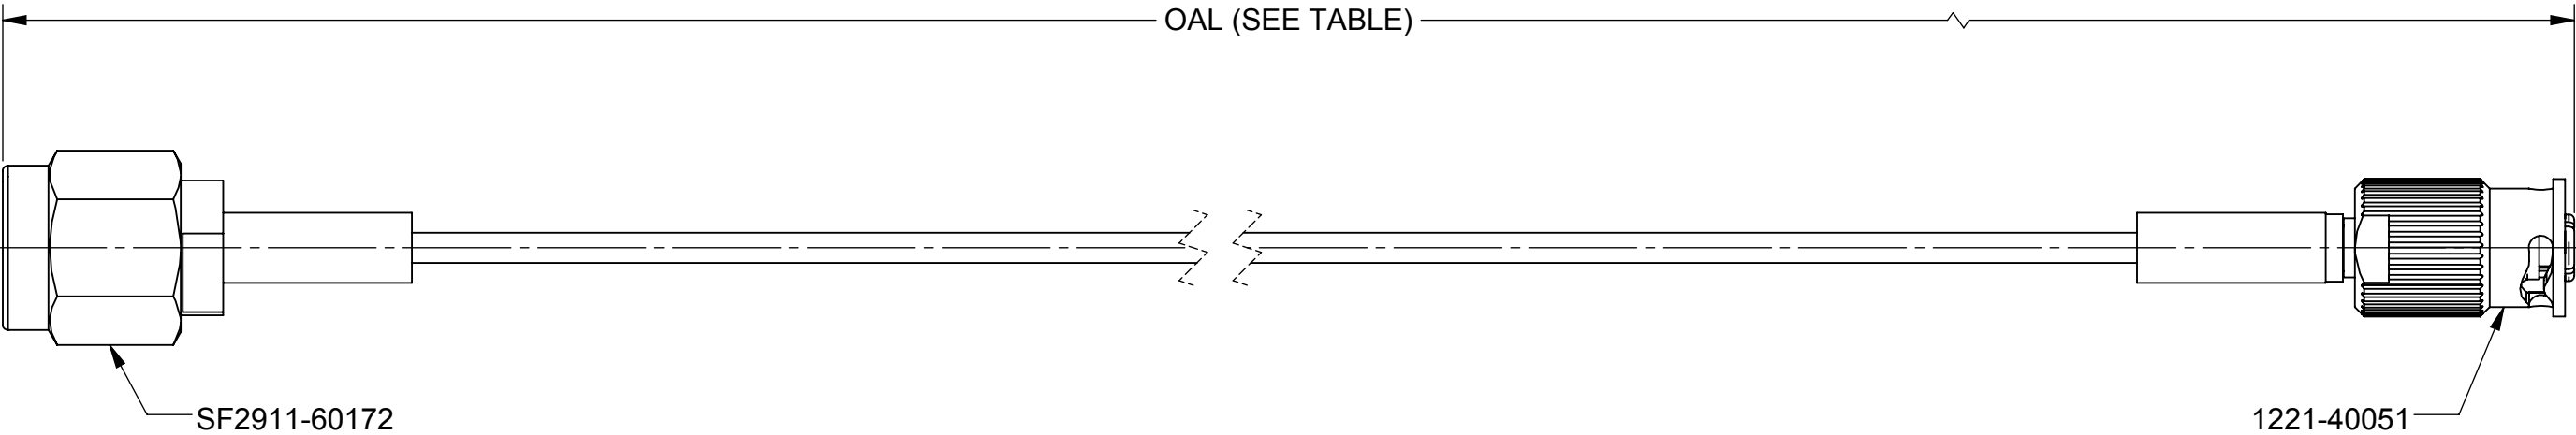

MATERIAL:

CONNECTORS: SMA STRAIGHT MALE (SF2911-60172)
SMP QB® STRAIGHT FEMALE (1221-40051)

CABLE: STANDARD FLEXTRA CABLE (200-70-214)

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 18.0 GHz

SV P/N	L(OAL)
7012-1301	(6.000")
7012-1302	(12.000")
7012-1303	(24.000")

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'
-----------	-----------	---