




## AA9225 SERIES

### External Dimensions

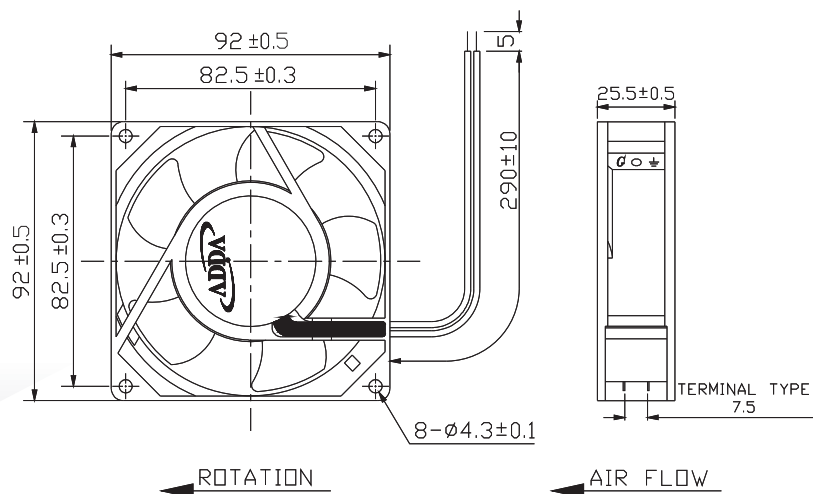

Frame: Aluminum Alloy  
Impeller: Plastic (UL: 94V-0)  
Motor Structure: Shaded Pole Induction Motor.  
Motor Protection: Impedance Protect.  
Lead wire: UL1430AWG22  
Wire Type: -AT Terminal / -AW Wires  
OPERATING TEMP\*: -10°C~70°C  
\*: -10°C~60°C for fans with sleeve/ball combination bearings.

### Specifications(Nominal)

\*: Noise is measured at the distance of one (1) meter from the axis of intake.


Bearing type: ◎=Ball ※=Sleeve ●=Hypro bearing

| Frame size (mm) | Model No.   | Bearing System Type | Volt. (VAC) | Freq. (Hz) | Current (A) | Power (W)   | Rated Speed (rpm) | Maximum AirFlow (CMM) | Maximum AirFlow (CFM) | Maximum Pressure (InAq) | Maximum Pressure (mmAq) | *Noise Level (dB/A) | Weight (g) |
|-----------------|-------------|---------------------|-------------|------------|-------------|-------------|-------------------|-----------------------|-----------------------|-------------------------|-------------------------|---------------------|------------|
| 92x92x25        | AA9251MB-AT | ◎ ※                 | 115         | 50/60      | 0.12/0.10   | 14.90/12.90 | 1800/2150         | 0.707/0.863           | 25.0/30.5             | 0.064/0.078             | 1.613/1.955             | 21.1/26.8           | 230        |
|                 | AA9252MB-AT |                     | 230         |            | 0.07/0.06   | 14.90/12.90 |                   |                       |                       |                         |                         |                     |            |
|                 | AA9251HB-AT | ◎ ※                 | 115         | 50/60      | 0.08/0.07   | 7.40/6.00   | 2000/2400         | 0.792/0.962           | 28.0/34.0             | 0.076/0.116             | 1.930/2.946             | 24.1/30.1           |            |
|                 | AA9252HB-AT |                     | 230         |            | 0.07/0.06   | 13.40/11.00 |                   |                       |                       |                         |                         |                     |            |


Specifications subject to change without notice.

The specification for bearing type is for reference only, for more bearing types information, please contact with your ADDA sales representative, thanks!!  
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝!!)

50Hz

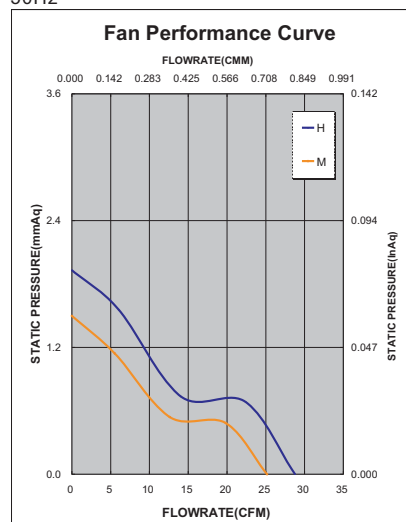

60Hz

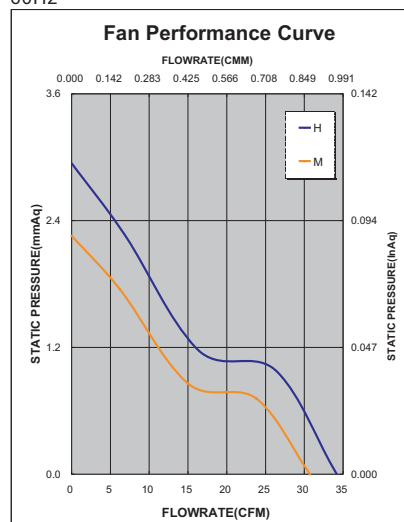

\*Safety approvals

|   |   |  |   |   |
|---|---|--|---|---|
|   |   |  |   |   |
| ✓ | ✓ |  | ✓ | ✓ |