

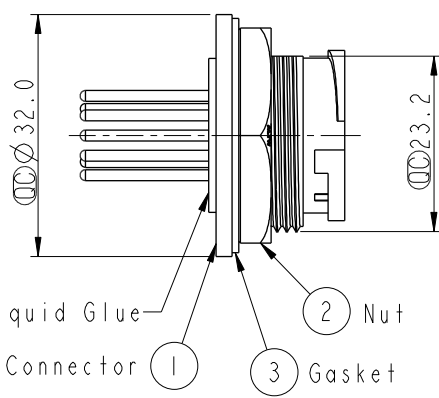
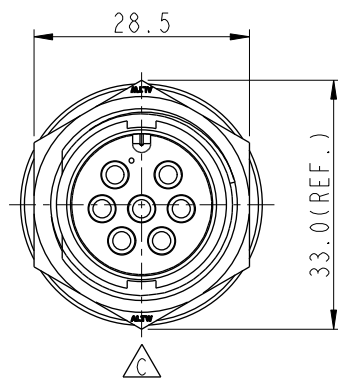
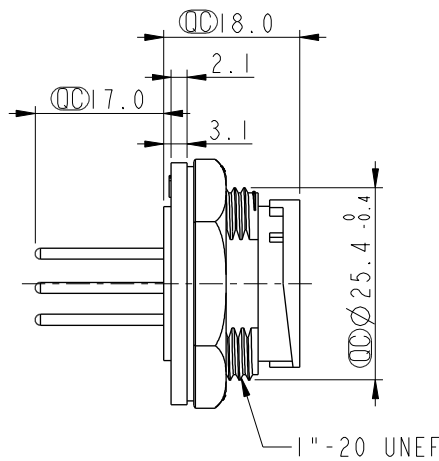



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8A0197	2008/09/15	Shin	Add Notes
C	LEN1740944	2017/04/11	Vicky	Update Logo
D	CI90314	2019/03/12	Ruru	Modify Note

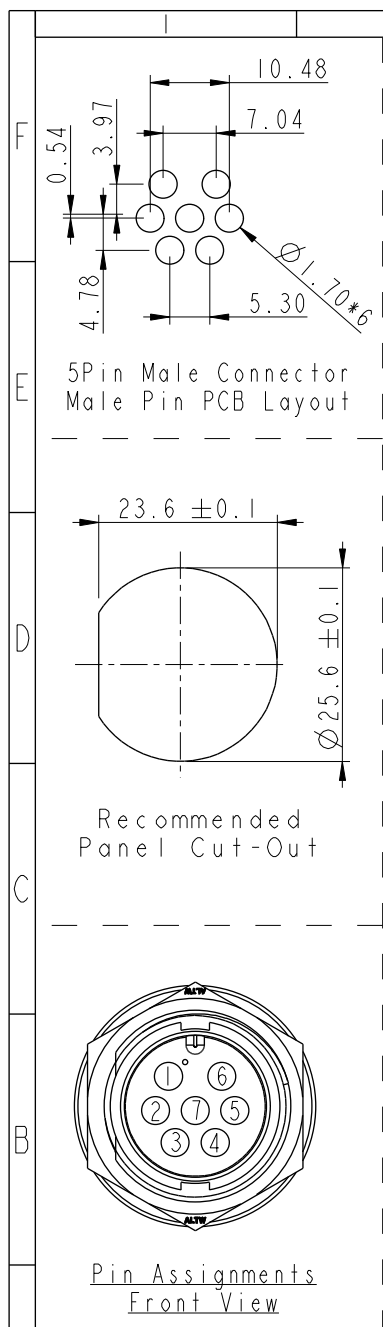

Note: Important Dimension

- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

* Use Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm

* Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 4.0mm

- * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE Lock Type Connector For Panel Mount 7Pin Male Connector Male Pin(20A)			ITEM NO DC-07PMMP-LC7001		DRAWN BY Ruru		DATE 2019-03-12	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 1:1	SIZE A4	SHEET 1 OF 1	DWG NO DC-07PMMP-LC7001		CHECKED BY Rita		DATE 2019-03-12	
REV. D		WC-REV. A.3	Inspection item		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-03-12	

Amphenol LTW
安費諾亮泰企業股份有限公司