
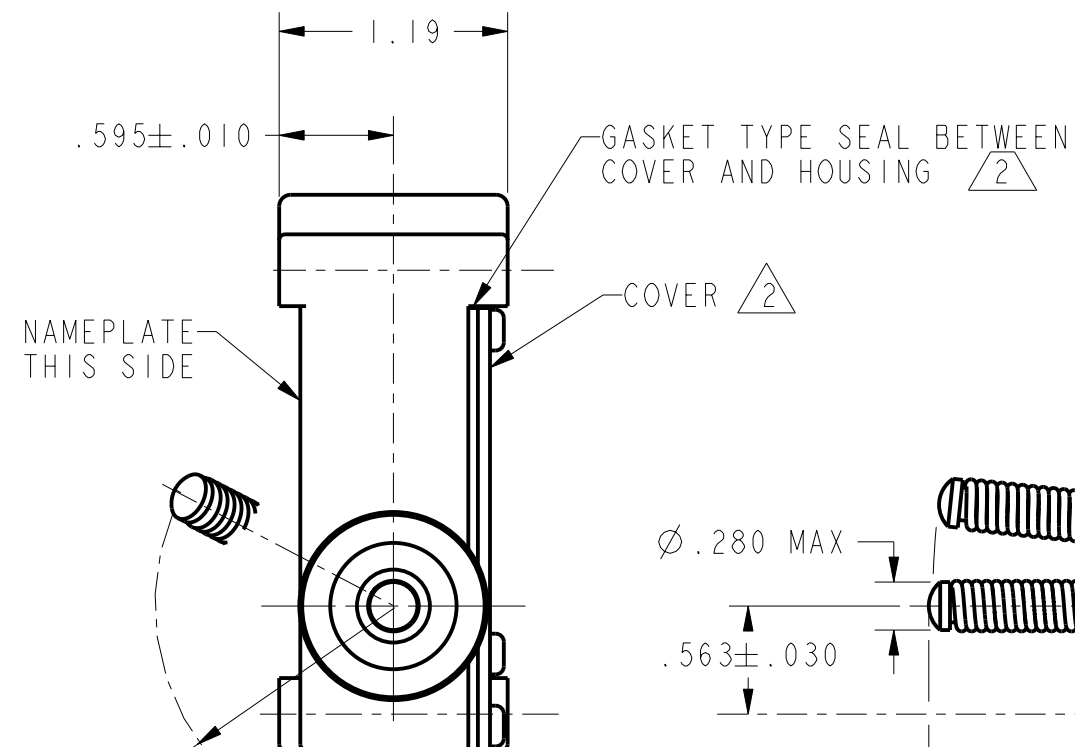


REV	DOCUMENT	CHANGED BY	CHECK
1	200517	GRT 26MAY00	SAV
2	200559	SAV 2 JUN 00	SAV

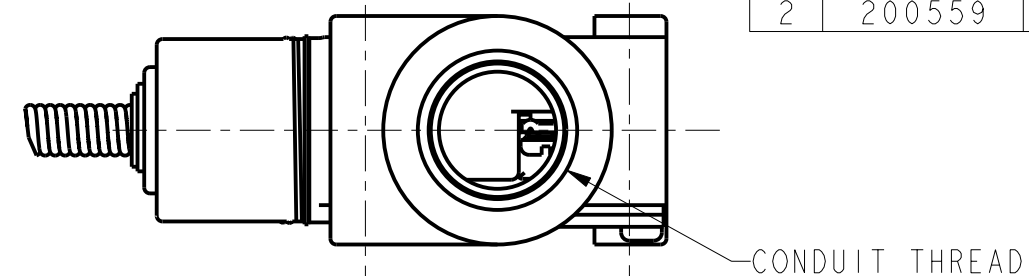

SWITCH WILL OPERATE BY MOVING ACTUATOR IN ANY DIRECTION EXCEPT DIRECT PULL

2X $\varnothing .182$ THRU WITH $\varnothing .29 \times .30$ DEEP COUNTERBORE BOTH SIDES

ELASTOMER PLUNGER SEAL SECURED TO COMPONENTS BY EXTERNAL BANDING

NORMALLY CLOSED TERMINAL

NORMALLY OPEN TERMINAL

COMMON TERMINAL

4X #4 THREAD FORMING PAN HEAD SCREWS

NOTES

- 1 - 3X 6-32 UNC PRESSURE PLATE TERMINAL SCREWS FURNISHED UNASSEMBLED
- 2 - CHARACTERISTICS:
OPERATING POSITION----- 15° MAX
OPERATING FORCE-----7 OZ MAX
- 4 - ELECTRICAL DATA:
CONTACT ARRANGEMENT: S P D T
L162 - 5A 125, 250, 277 VAC, 1/10 HP 250 VAC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:

		US (inch) CUSTOMARY	SI (mm) METRIC
NO PLACE	X	$\pm .040$	± 1
ONE PLACE	.X	$\pm .030$	$\pm 0,4$
TWO PLACE	.XX	$\pm .015$	$\pm 0,15$
THREE PLACE	.XXX	$\pm .005$	$\pm$
ANGLES		$\pm$	$\pm$
RAW MATERIAL-COMMERCIAL STANDARD			

THIRD ANGLE PROJECTION



DRAWN	GRT	26MAY00
CHECK	SAV	26MAY00

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL SENSING AND CONTROL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 3D ASME Y14.5M-1994

Honeywell
Sensing and Control

TITLE
SWITCH-ENCLOSED

SIZE	DWG TYPE	DRAWING NAME	REV
B	M	BFL1-AW1-RH01	2
SCALE	FULL	WEIGHT	SHEET 1 OF 1