


Phone Jack Stereo 3.5mm

161-354W-EX

KOBICONN

Phone Jack Stereo 3.5mm

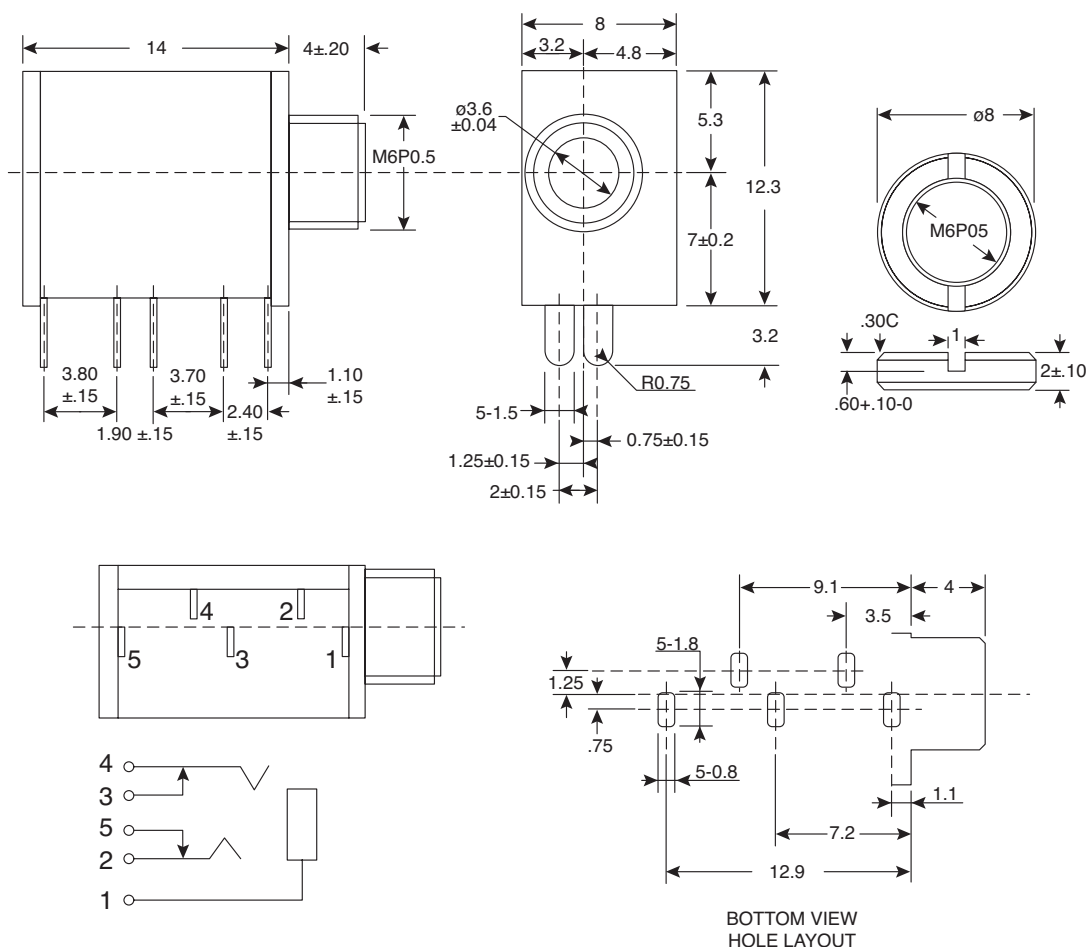

Dimensions: mm

ELECTRICAL SPECIFICATIONS		MATERIAL SPECIFICATIONS				
Type:	Stereo Phone	Part Name	QTY	Material	Plating	Remarks
Dielectric Strength:	500VAC for 1 minute	Body	1	P.B.T. +G15%		Black
Insulation Resistance:	100MΩ min. @ 500VDC	Cover	1	P.C.		
Contact Resistance:	30mΩ max.	Main Terminal A	1	PBR-1/2H 0.3t	Ag	(Tip Contact)
Insertion / Extraction Force:	5 to 20N / 4 to 20N	Main Terminal B	1	PBR-1/2H 0.25t	Ag	(Ring Contact)
Life:	5,000 Cycles min.	Fix Terminal A	1	BsR2-H 0.3t	Ag	
Operating Temp:	-20°C ~ +70°C	Fix Terminal B	1	BsR2-H 0.3t	Ag	
		Earth Terminal	1	BsR2-H 0.3t	Ag	(Sleeve Contact)
		Spring A	1	SUS-304		Heat Treatment
		Spring B	1	SUS-304		Heat Treatment
		Metal (Eyelet Type)	1	BsBM2	Ni-3	

RoHS Compliant by Exemption

Date Last Revised: 6-29-12

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC- 301279

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

161-354W-EX