

## DURD560A




## Description

Littelfuse DUR series Ultrafast Recovery Rectifier is designed to meet the general requirements of commercial applications by providing low  $T_{rr}$ , high-temperature, low-leakage and low forward voltage drop products. It is suitable for output rectifier, free-wheeling or boost diode in high-frequency power switching application such as switch mode power supply and DC-DC converters.

## Features

- Ultra-fast switching
  - Low reverse leakage current
  - High surge current capability
  - Low forward voltage drop
  - Single die in surface
- mount TO-252 (DPAK) package
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD-609A.01)

## Circuit Diagram

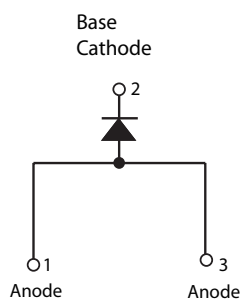

## Applications

- Output rectifiers in switch mode power supplies (SMPS) and DC to DC converters
- Free-wheeling diode or boost diode in converters and motor control circuits
- Anti-parallel diode for high frequency switching devices such as IGBT
- Uninterruptible Power Supplies (UPS)
- Inductive heating and melting
- Ultrasonic cleaners and welders

## Maximum Ratings

| Characteristics                                       | Symbol      | Conditions   | Max. | Unit |
|---|-------------|--|------|------|
| Peak Inverse Voltage                                  | $V_{RWM}$   | -  | 600  | V    |
| Average Forward Current (per device)                  | $I_{O(AV)}$ | 50% duty cycle @ $T_c = 100^\circ\text{C}$ , rectangular wave form | 5    | A    |
| Peak One Cycle Non-Repetitive Surge Current (per leg) | $I_{FSM}$   | 8.3 ms, half sine pulse  | 60   | A    |

## Electrical Characteristics

| Characteristics                              | Symbol    | Conditions   | Typ. | Max. | Unit          |
|--|-----------|--|------|------|---------------|
| Forward Voltage Drop ( Per Leg) <sup>1</sup> | $V_{F1}$  | @5A, Pulse, $T_j = 25^\circ\text{C}$                                   | 1.50 | 1.70 | V             |
|  | $V_{F2}$  | @5A, Pulse, $T_j = 125^\circ\text{C}$                                  | 1.41 | 1.50 | V             |
| Reverse Current ( Per Leg) <sup>1</sup>      | $I_{R1}$  | @ $V_R = \text{Rated } V_R$ , $T_j = 25^\circ\text{C}$                 | 0.10 | 5    | $\mu\text{A}$ |
|  | $I_{R2}$  | @ $V_R = \text{Rated } V_R$ , $T_j = 125^\circ\text{C}$                | 52   | 500  | $\mu\text{A}$ |
| Reverse Recovery Time ( Per Leg)             | $t_{rr1}$ | $I_F = 500\text{mA}$ , $I_R = 1\text{A}$ , and $I_{rm} = 250\text{mA}$ | -    | 35   | ns            |

Footnote 1: Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

### Thermal-Mechanical Specifications

| Characteristics                             | Symbol          | Conditions    | Specification | Unit |
|---|-----------------|---------------|---------------|------|
| Junction Temperature                        | $T_J$           | -             | -55 to +150   | °C   |
| Storage Temperature                         | $T_{stg}$       | -             | -55 to +150   | °C   |
| Typical Thermal Resistance Junction to Case | $R_{\theta JC}$ | -             | 4.5           | °C/W |
| Approximate Weight                          | wt              | -             | 0.39          | g    |
| Case Style                                  | -               | DPAK (TO-252) | -             | -    |

Figure 1: Typical Forward Characteristics

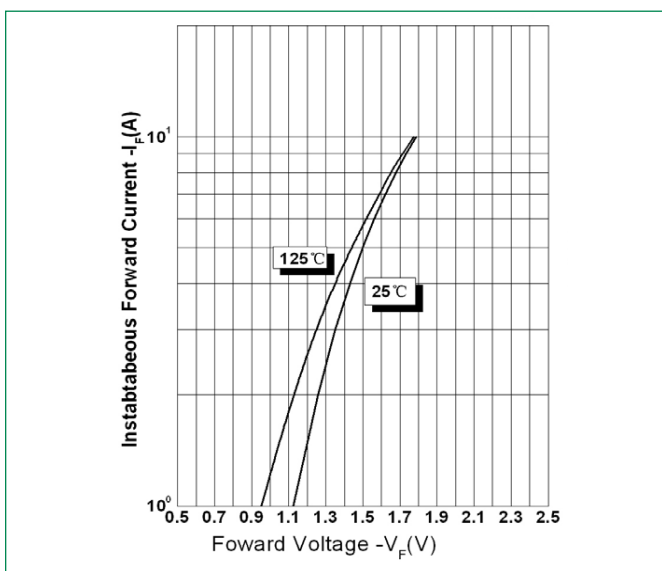


Figure 2: Typical Reverse Characteristics



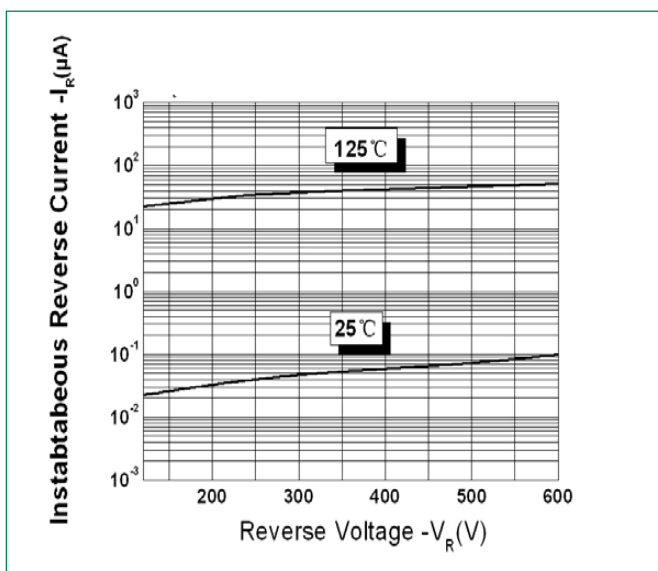


Figure 3: Typical Junction Capacitance

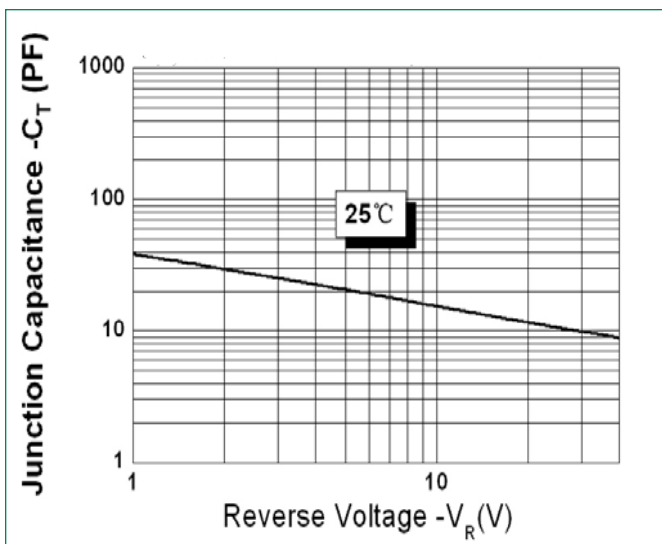

Part Numbering and Marking System

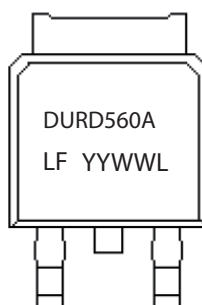

DUR = Device Type  
 D = Package type  
 5 = Forward Current (5A)  
 60 = Reverse Voltage (600V)  
 A = A  
 LF = Littelfuse  
 YY = Year  
 WW = Week  
 L = Lot Number


# Ultrafast Recovery Rectifier

## DURD560A, 5A, 600V, TO-252

### Packing Options


| Part Number | Marking  | Packing Mode   | M.O.Q |
|-------------|----------|----------------|-------|
| DURD560A    | DURD560A | 2500pcs / reel | 2500  |

### Dimensions-Package TO-252(DPAK)

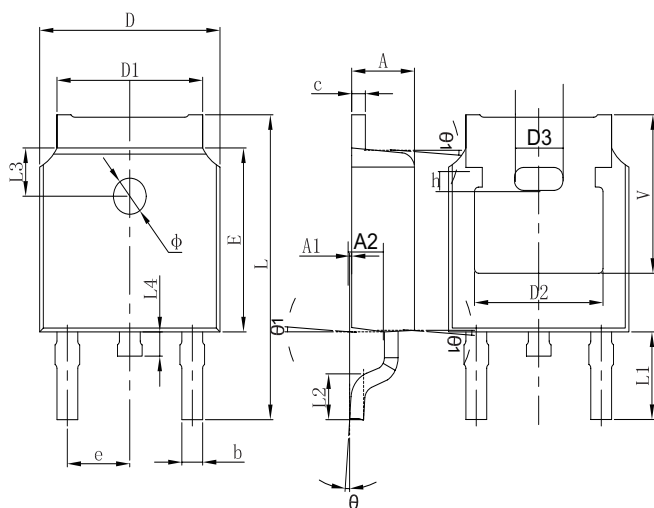

| Symbol | Millimeters |       |
|--------|-------------|-------|
|        | Min         | Max   |
| A      | 2.20        | 2.38  |
| A1     | 0           | 0.10  |
| b      | 0.71        | 0.81  |
| c      | 0.46        | 0.56  |
| D      | 6.50        | 6.70  |
| D1     | 5.13        | 5.46  |
| D2     | 4.83 REF    |       |
| E      | 6.00        | 6.20  |
| e      | 2.186       | 2.386 |
| L      | 9.80        | 10.40 |
| L1     | 2.90 REF    |       |
| L2     | 1.40        | 1.70  |
| L3     | 1.60 REF    |       |
| L4     | 0.60        | 1.00  |
| ∅      | 1.10        | 1.30  |
| θ      | 0°          | 8°    |
| A2     | 0.91        | 1.11  |
| V      | 5.35 REF    |       |
| D3     | 1.778 REF   |       |
| h      | 0.762 REF   |       |
| θ1     | 7°          |       |

### Carrier Tape & Reel Specification TO-252 (DPAK)

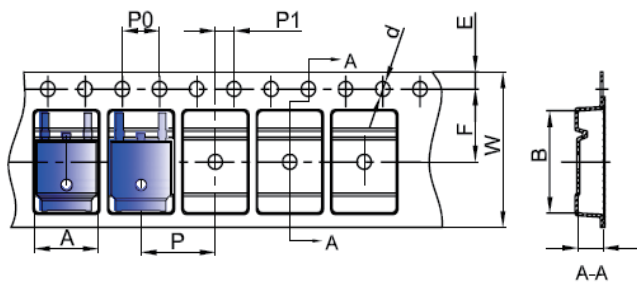

| Symbol | Millimeters |       |
|--------|-------------|-------|
|        | Min         | Max   |
| A      | 6.80        | 7.00  |
| B      | 10.40       | 10.60 |
| C      | 2.60        | 2.80  |
| d      | ∅1.45       | ∅1.65 |
| E      | 1.65        | 1.85  |
| F      | 7.40        | 7.60  |
| P0     | 3.90        | 4.10  |
| P      | 7.90        | 8.10  |
| P1     | 1.90        | 2.10  |
| W      | 15.90       | 16.30 |