


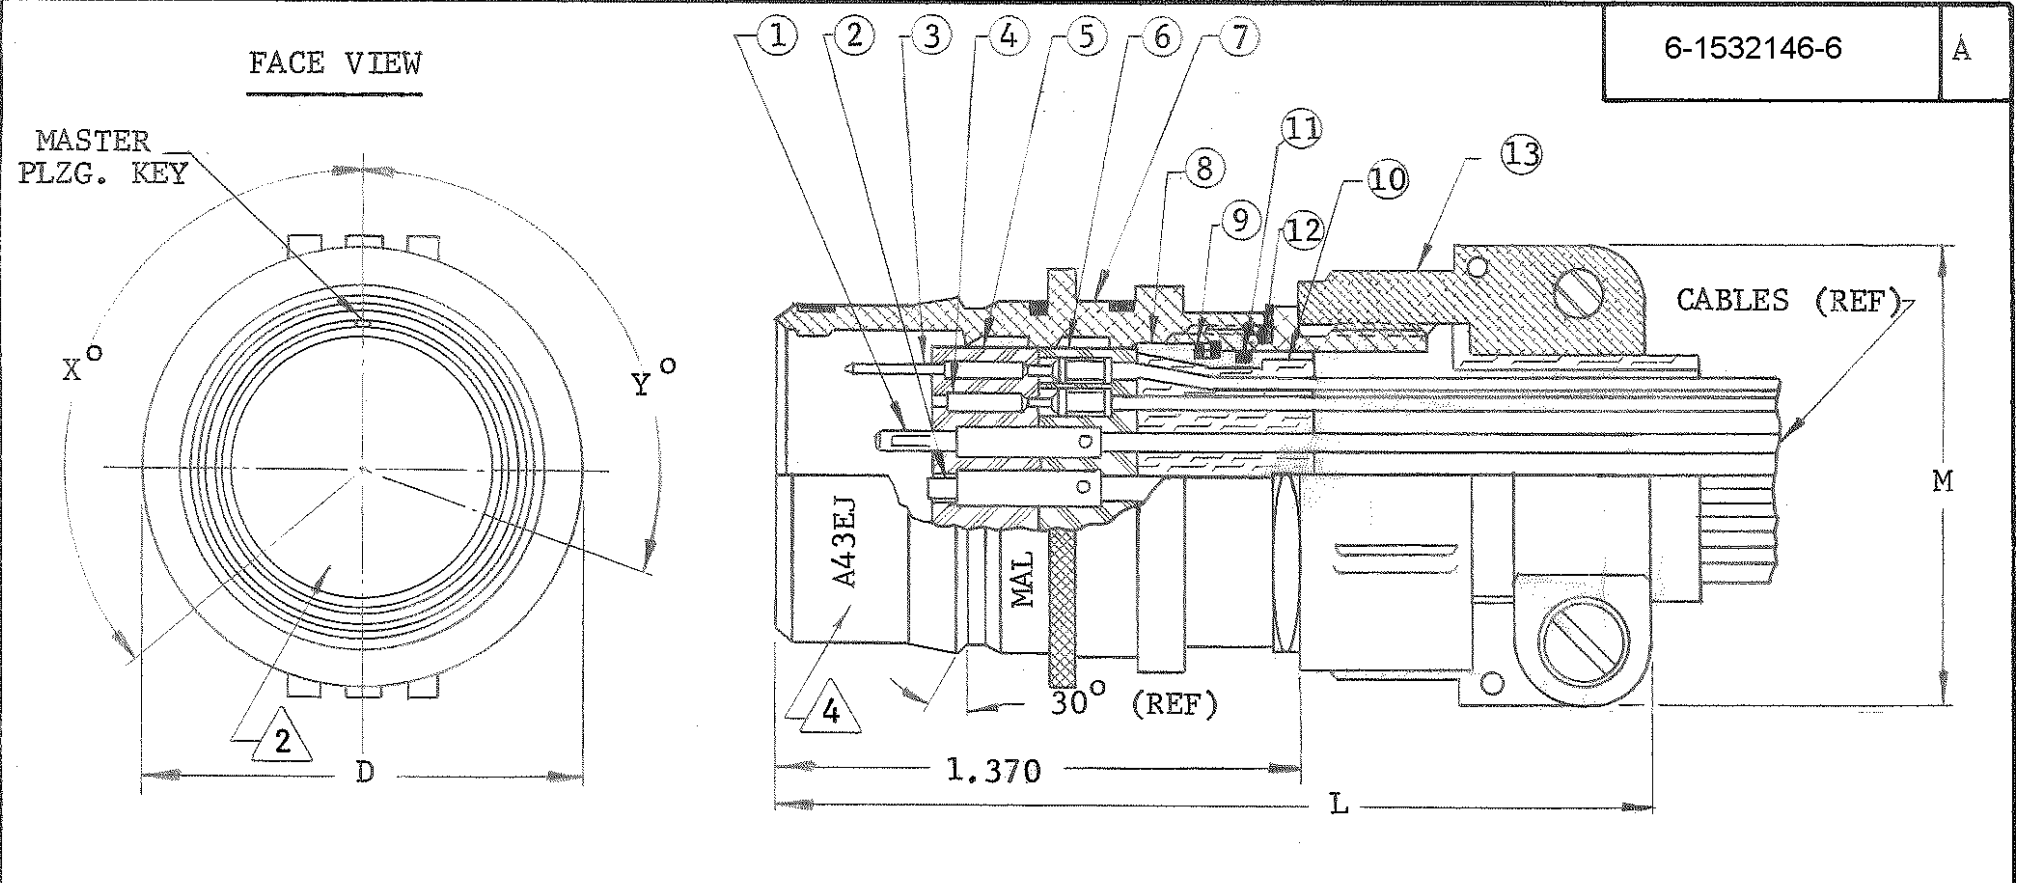

CODE	ITEM	DESCRIPTION	CATALOG NO.	D	L	M
	1	CONTACT, PIN, COAXIAL	A43*J -**(046)	.760	2.183	.815
13.6		HOUSING	B43*J -**(046)	.947	2.270	1.062
13,11,6		SOCKET (INNER CONTACT)	C43*J -**(046)	1.135	2.315	1.170
9		BUSHINGS				
13,2		JERK RINGS				
	2	CONTACT, SOCKET, COAXIAL				
13,2		HOUSING & JERK RINGS				
12,4		PIN (INNER CONTACT)				
9		BUSHINGS				
12,4	3	CONTACT, PIN POWER				
11,5,2	4a	CONTACT, SOCKET POWER (#12 & #16 GAGE)				
12,7,4	4b	CONTACT, SOCKET POWER (#22 GAGE)				
8	5	INSERT, FRONT				
8	6	INSERT, REAR				
15,1	7	HOUSING, LINE CORD PUSH-PULL COUPLING				
15,1	8	FOLLOWER				
7	9	SPRING, INSERT RETAINING				
10	10	GROMMET (SEALED ONLY)				
10	11	O-RING, FOLLOWER (SEALED ONLY)				
10	12	O-RING, RETAINING NUT (SEALED ONLY)				
	13	CABLE CLAMP SUBASSY				
1,17		BODY CABLE CLAMP				
3,17		CLAMP				
3,14		SCREW				
3,17		LOCKWASHER				
16		BUSHING				
1,15		ADAPTER				

CODE	STANDARD MATERIAL AND FINISH
1	ALUMINUM ALLOY QQ-A-225
2	BRASS QQ-B-626
3	STAINLESS STEEL MIL-S-5059
4	LEADED COPPER
5	BERYLLIUM COPPER (BERYLCO 10) H.T.
6	BERYLLIUM COPPER QQ-C-530
7	BERYLLIUM COPPER QQ-C-533
8	DIALYL PHTHALATE MIL-M-14
9	TEFLON L-P-403
10	SILICONE RUBBER ZZ-R-765
11	GOLD PLATE MIL-C-45204, TYPE II, CLASS I
12	GOLD PLATE MIL-C-45204, TYPE II, CLASS II
13	SILVER PLATE .0002, QQ-S-365, TYPE II
14	PASSIVATE QQ-P-35
15	CLEAR ANODIZE MIL-A-8625
16	POLYCHLOROPRENE, MIL-R-3065
17	ELECTROLESS NICKEL .0002-.0003 PER MIL-C-26074 (AMEND I);

5. COAXIAL CABLE ACCEPTANCE DIMS.
JACKET DIA. .087 MAX.
SHIELD DIA. .053 MAX.
DIELECTRIC DIA. .037 MAX.
INNER CONDUCTOR DIA. .014 MAX.
4. CONNECTOR CATALOG NUMBER WILL BE STAMPED IN AREA INDICATED.
3. RECOMMEND ORDERING: PIN CONTACTS (POWER OR COAXIAL) WITH RECEPTACLE CONNECTOR;
SOCKET CONTACTS (POWER OR COAXIAL) WITH PLUG CONNECTOR
2. SEE CATALOG FOR COMPLETE ORDERING INFORMATION, VARIOUS LAYOUTS, AND ALTERNATE POLARIZING POSITIONS.
1. THIS IS A GENERAL SPECIFICATION CONTROL DRAWING AND DRAWING NUMBER SHOULD NOT BE USED FOR ORDERING. ORDERS PLACED BY "CATALOG NUMBERS ONLY".

TYPICAL MULTIPIN CATALOG NUMBER

A

43

A

J

SEE NOTE 2

P

14

(046)

SIZE

SERIES

E-SEALED
A-UNSEALED

SHELL
TYPE

LAYOUT

CONTACT
TYPE
(SEE NOTE 3)

ALT. POL.
POSITION
IF REQ'D

SPECIAL
MODIFICATION

				STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED DEC. ± .032 FRAC. ± ANGLES ± ECCENTRICITY MAX. T.I.R. — HOLE DIA. + — SURFACE ROUGHNESS ✓ MICRO INCHES THREADS TO MIL-S-7742 COMMERCIAL TOLERANCES APPLY TO STOCK DIMENSIONS				MALCO A MICRODOT COMPANY, INC. 306 PASADENA AVE., SO. PASADENA, CALIF. SURFACE TREATMENT NOTED MATERIAL NOTED				APP APP <i>REC</i> 10-12-81 CHECKED BY <i>Eg Hsu</i> DRAWN BY <i>Carol Brown</i> SCALE NONE WT DATE 10/9/81			
RECEPTACLE, LINE CORD PUSH-PULL COUPLING WITH CABLE CLAMP (046)				PROD. CODE 984				DRAWING NUMBER 6-1532146-6							
ASSEMBLY NEXT ASSEMBLIES				NO REQ'D				CODE CD				A			
A				20121				NEW RELEASE				BY <i>mm</i> DATE <i>10/9/81</i> APP <i>BC</i>			
LET				ECO				REVISION DESCRIPTION				BY <i>CK</i> DATE APP			