MICRO SWITCH
FREEPORT, ILLINOIS, U S A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
OP-AR400

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

OP-AR400 | REPLACES | RELEASE NO. PR-3948 | M | DRAWING NUMBER 00 | ISSUE X | CHECK

REVISIONS

A	C026103	D L F 21 JUL 69
B	ETS	MJB 3 FEB 71
C	PR-3948	D B W 15 FEB 74
D	C037779	J A L 19 NOV 76
E	C055031 J	JAS 26 APR 85
F	C073344	GJW 3 OCT 92
G	CO 81637	GLH 19 MAR 98

CHECK | 23 AUG 67 | LSD | CHECK | 23 AUG 67 | OMW | DRAWN | PO-30378-003

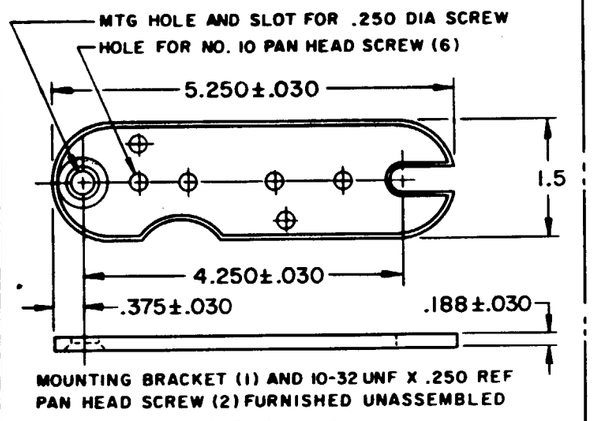

MOUNTING BRACKET (1) AND 10-32 UNF X .250 REF PAN HEAD SCREW (2) FURNISHED UNASSEMBLED

SCALE - HALF SIZE

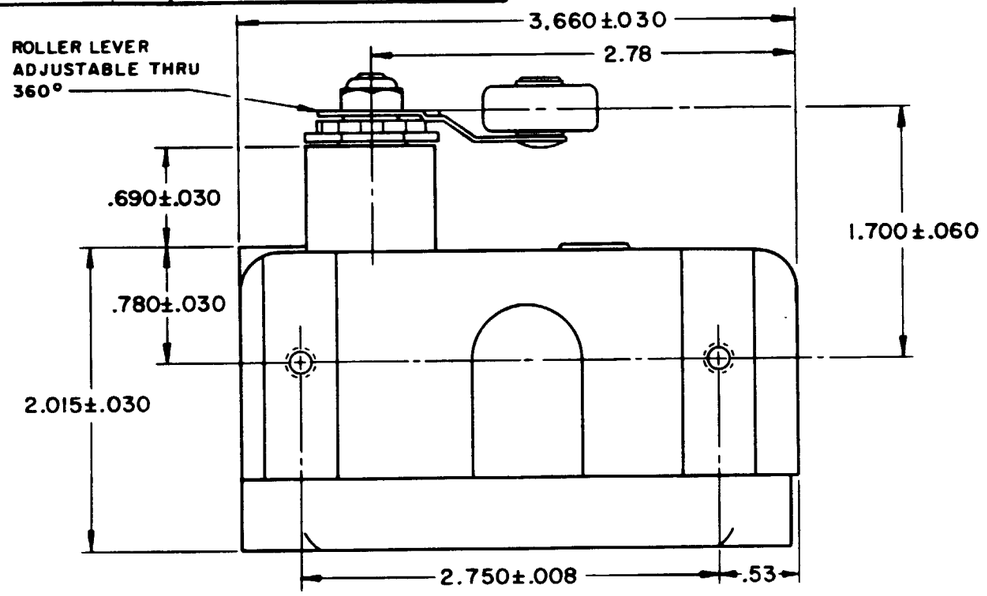

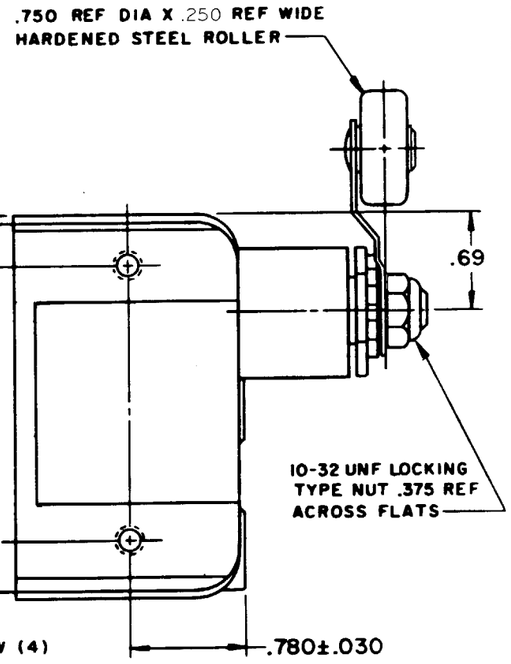

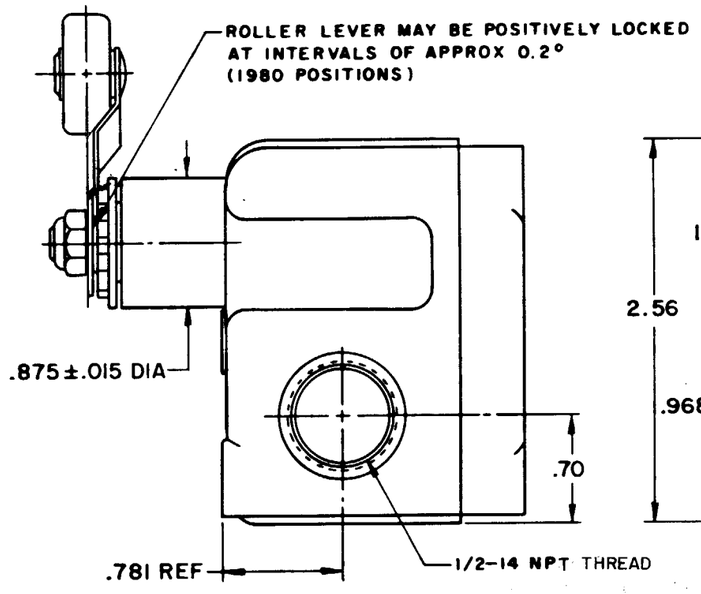

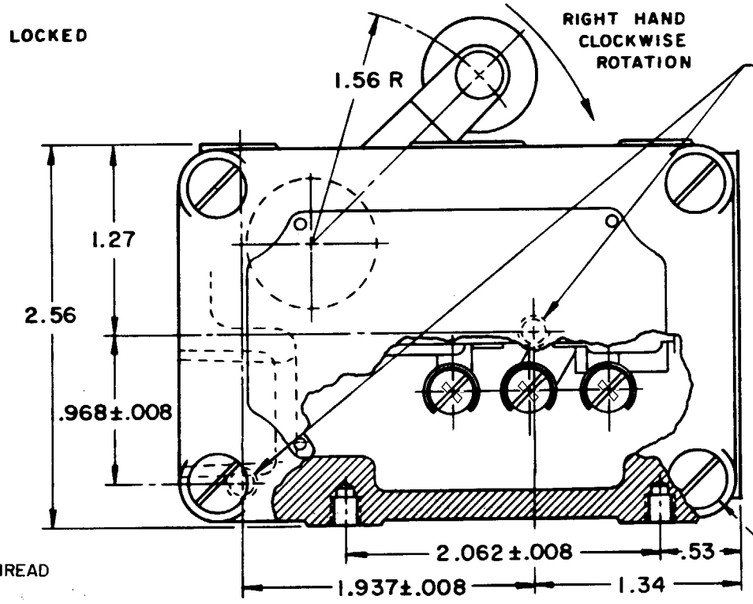

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE-------1/2-1 1/4 LB	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ---------1/4 LB MIN PRETRAVEL ----------.219 MAX 8° DIFFERENTIAL TRAVEL---.007 MAX 1/4° DO NOT OVERTRAVEL MORE THAN ---- 90°	5A-125, 250 OR 480 VAC 1/2A-125 VDC; 1/4A-250 VDC	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.03 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±½°
BASIC SWITCH REPLACEMENT--BZ-2R244-P1		WEIGHT

NOTE-

1 - MOUNTING SCREW HOLES, 10-32 UNF-2B THREADS X .219 REF DEEP (8)
2 - 8-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
3 - SWITCH WILL WITHSTAND TEMPERATURE OF 400° F FOR 100 HOURS