



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190348	2019/03/06	Vicky	Change Note

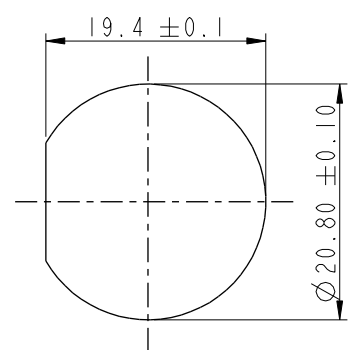



Recommended Panel
Cut-Out

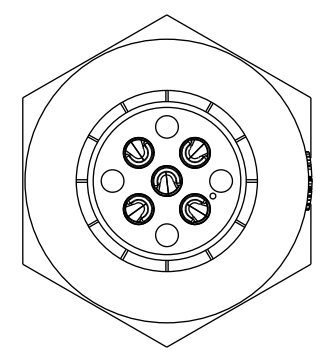


With Liquid Glue

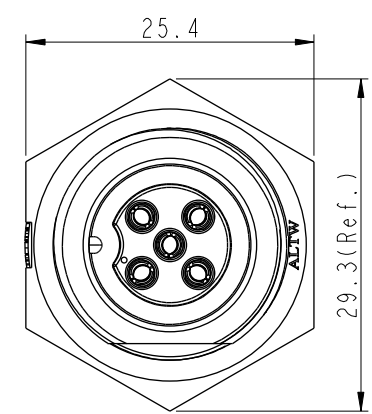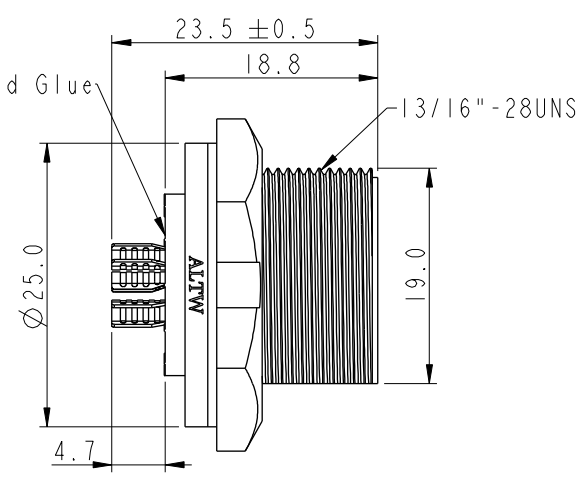

ACB-XXPMFS-SC7001
04: 4Pin
:
05: 5Pin

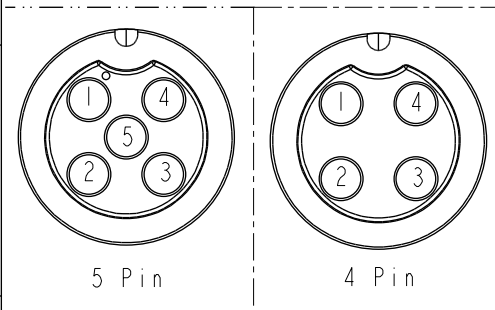

Pin Assignments Front View

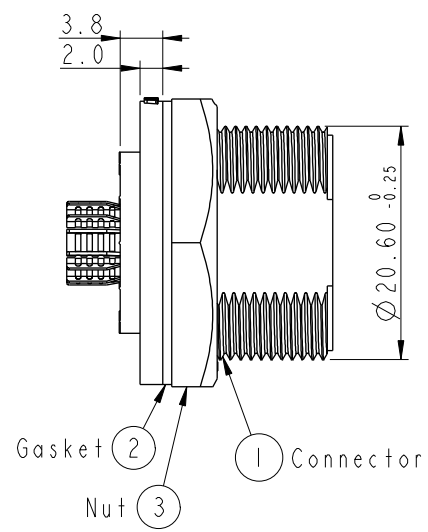

- Note:
- * (QC) Important Dimension To Check.
 - * Waterproof Rate: IP67, Unmated.
 - * Housing: Thermoplastic, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Gasket: Rubber, Gray.
 - * Nut: Thermoplastic, Black.
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness: 2.3mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness: 3.5mm
 - * Gasket and Nut are packed separately
in PE bags. (Gasket/Nut不組裝, 散裝出貨)

UNIT: mm				MIDDLE PANEL SCREW M CONN F PIN Amphenol LTW 安費諾亮泰企業股份有限公司			ITEM NO		DRAWN BY Vicky		DATE 2019-03-06						
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 3:2	SIZE A4				SHEET 1 OF 1		DWG NO ACB-XXPMFS-SC7001		CHECKED BY Rita		DATE 2019-03-06				
		REV. B	WC-REV. A.2				(QC): Inspection item		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-03-06				
1		2		3		4		5		6		7		8		WI0814-03-0001A2	

Amphenol LTW
安費諾亮泰企業股份有限公司