

# Spezifikation für Freigabe / specification for release

Kunde / customer :

Artikelnummer / part number : 7443320082


Bezeichnung : SPEICHERDROSSEL WE-HCC 1210 (Ferrit)

description : POWER-CHOKE WE-HCC 1210 (Ferrite)



DATUM / DATE : 2009-11-03

## A Mechanische Abmessungen / dimensions:

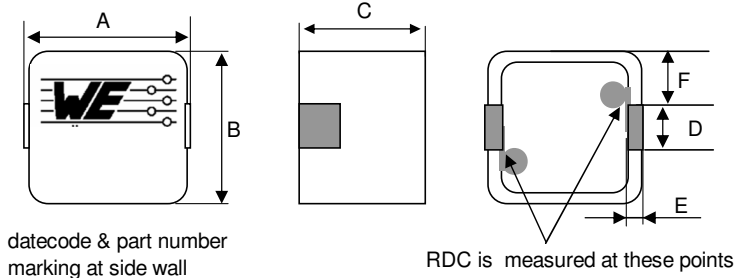

datecode & part number  
marking at side wall

RDC is measured at these points


| A | 12,1 ± 0,3 | mm |
|---|------------|----|
| B | 11,4 ± 0,3 | mm |
| C | 9,5 ± 0,5  | mm |
| D | 3,5 ± 0,2  | mm |
| E | 2,0 ± 0,2  | mm |
| F | 3,9 ± 0,5  | mm |
|   |            |    |
|   |            |    |

Marking = part number

## B Elektrische Eigenschaften / electrical properties:

| Eigenschaften / properties                | Testbedingungen / test conditions |           | Wert / value | Einheit / unit | tol.  |
|-------------------------------------------|-----------------------------------|-----------|--------------|----------------|-------|
| Lerrlaufinduktivität / initial inductance | 100 kHz / 10mA                    | $L_0$     | 0,82         | μH             | ± 20% |
| DC-Widerstand / DC-resistance             | @ 20° C                           | $R_{DC}$  | 1,17         | mΩ             | ± 10% |
| Nennstrom / rated current                 | ΔT = 50 K                         | $I_N$     | 24,0         | A              | typ.  |
| Sättigungsstrom / saturation current      | ΔL/L <sub>0</sub> = 30 %          | $I_{sat}$ | 36           | A              | typ.  |
| Eigenres.-Frequenz / self-res.-frequency  |                                   | SRF       | 99,0         | MHz            | typ.  |

## C Lötpad / soldering spec.:

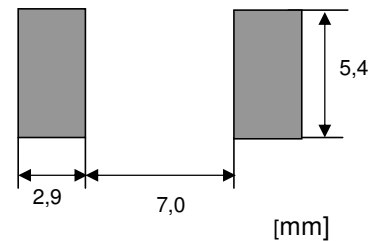

## D Prüfgeräte / test equipment:

WAYNE KERR 3260B für/for  $L_0$ ;  $I_{SAT}$

HP 34401 A & Fluke 54II für/for  $I_{DC}$ ;

Metra HIT 27I für/for  $R_{DC}$

## E Testbedingungen / test conditions:

|                                    |        |
|------------------------------------|--------|
| Luftfeuchtigkeit / humidity:       | 33%    |
| Umgebungstemperatur / temperature: | +20 °C |

## F Werkstoffe & Zulassungen / material & approvals:

|                                |                           |
|--------------------------------|---------------------------|
| Basismaterial / base material: | Ferrite                   |
| Draht / wire:                  | JIS 155 °C , UL : E201757 |

## G Eigenschaften / general specifications:

|                                                                                                                  |                  |
|------------------------------------------------------------------------------------------------------------------|------------------|
| Arbeitstemperatur / operating temperature:                                                                       | -40 °C - +125 °C |
| Lagertemp. / storage temperature:                                                                                | -40 °C - +60 °C  |
| It is recommended that the temperature of the part does not exceed 125 °C under worst case operating conditions. |                  |

|                                     |                          |      |                         |              |
|-------------------------------------|--------------------------|------|-------------------------|--------------|
| Freigabe erteilt / general release: | Kunde / customer         |      |                         |              |
|                                     |                          |      |                         |              |
|                                     |                          |      |                         |              |
| Datum / date                        | Unterschrift / signature |      |                         |              |
|                                     | Würth Elektronik         |      |                         |              |
|                                     |                          | BD   | Version 2               | 09-11-03     |
|                                     |                          | Rst  | Version 1               | 09-05-05     |
| Geprüft / checked                   | Kontrolliert / approved  | Name | Änderung / modification | Datum / date |

## Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400  
http://www.we-online.de

# Spezifikation für Freigabe / specification for release

Kunde / customer :

Artikelnummer / part number :

7443320082

LF




Bezeichnung : **SPEICHERDROSSEL WE-HCC 1210 (Ferrit)**

description : **POWER-CHOKE WE-HCC 1210 (Ferrite)**

**WÜRTH ELEKTRONIK**

DATUM / DATE : 2009-11-03

## H Induktivitätskurve / Inductance curve:

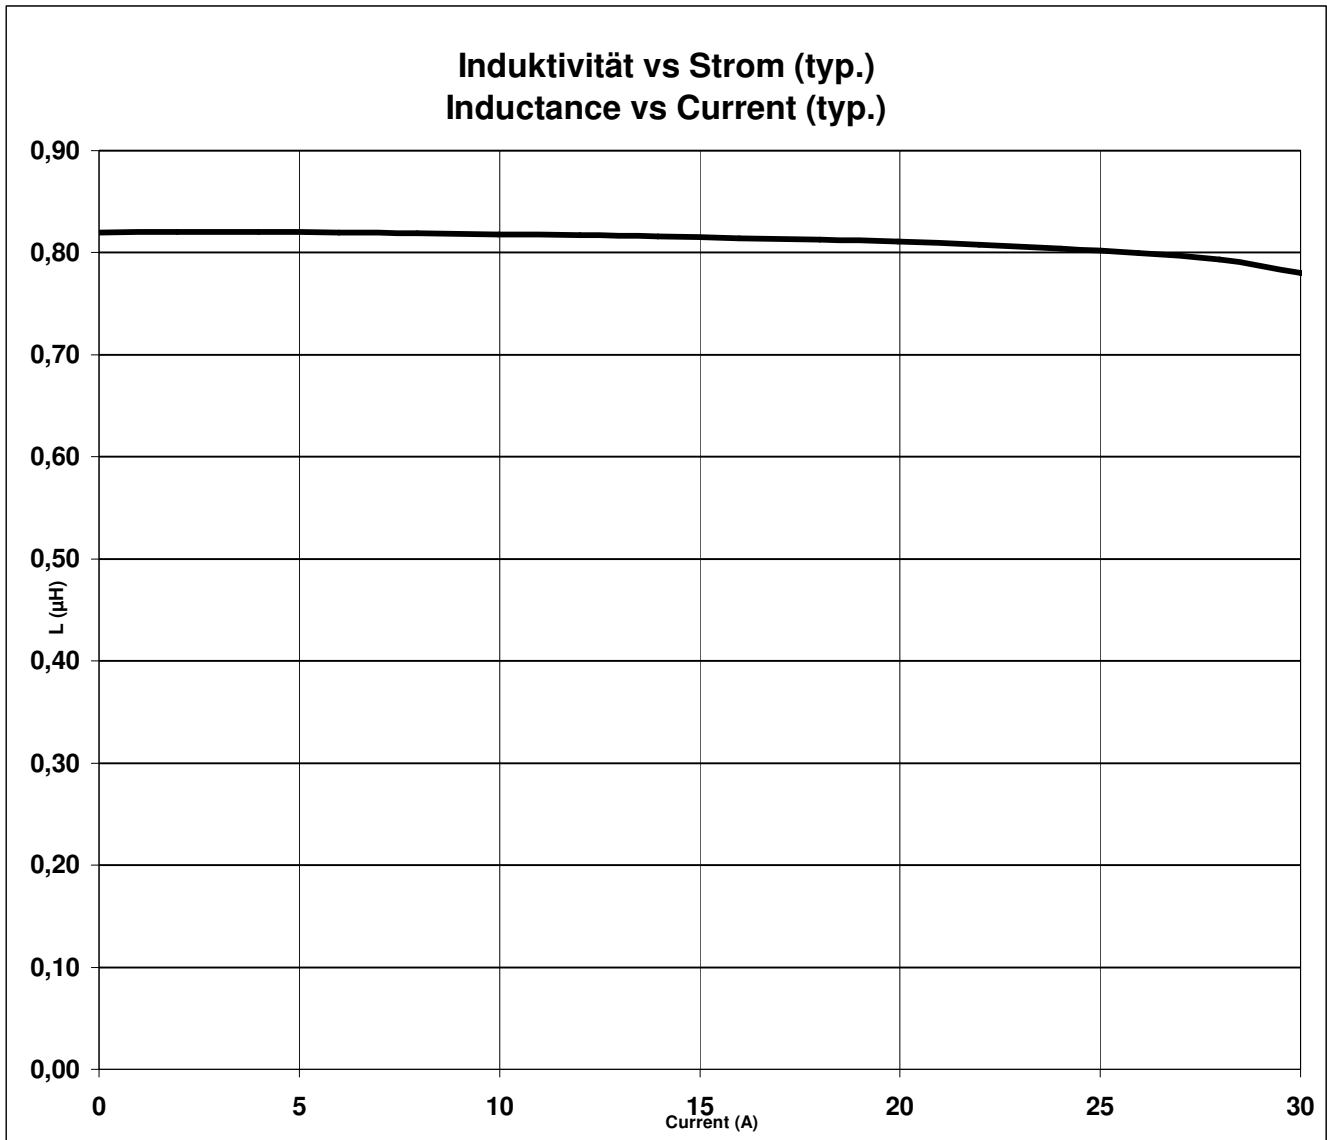

|                                     |                          |      |                         |              |
|-------------------------------------|--------------------------|------|-------------------------|--------------|
| Freigabe erteilt / general release: | Kunde / customer         |      |                         |              |
|                                     |                          |      |                         |              |
|                                     |                          |      |                         |              |
| Datum / date                        | Unterschrift / signature |      |                         |              |
|                                     | Würth Elektronik         |      |                         |              |
|                                     |                          | BD   | Version 2               | 09-11-03     |
|                                     |                          | Rst  | Version 1               | 09-05-05     |
| Geprüft / checked                   | Kontrolliert / approved  | Name | Änderung / modification | Datum / date |

**Würth Elektronik eiSos GmbH & Co. KG**

D-74638 Waldenburg · Max-Eyth-Strasse 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400

<http://www.we-online.de>

# Spezifikation für Freigabe / specification for release

Kunde / customer :

Artikelnummer / part number :

7443320082

LF




Bezeichnung : **SPEICHERDROSSEL WE-HCC 1210 (Ferrit)**

description : **POWER-CHOKE WE-HCC 1210 (Ferrite)**

**WÜRTH ELEKTRONIK**

DATUM / DATE : 2009-11-03

## I Temperaturanstieg / Temperature rise curve:

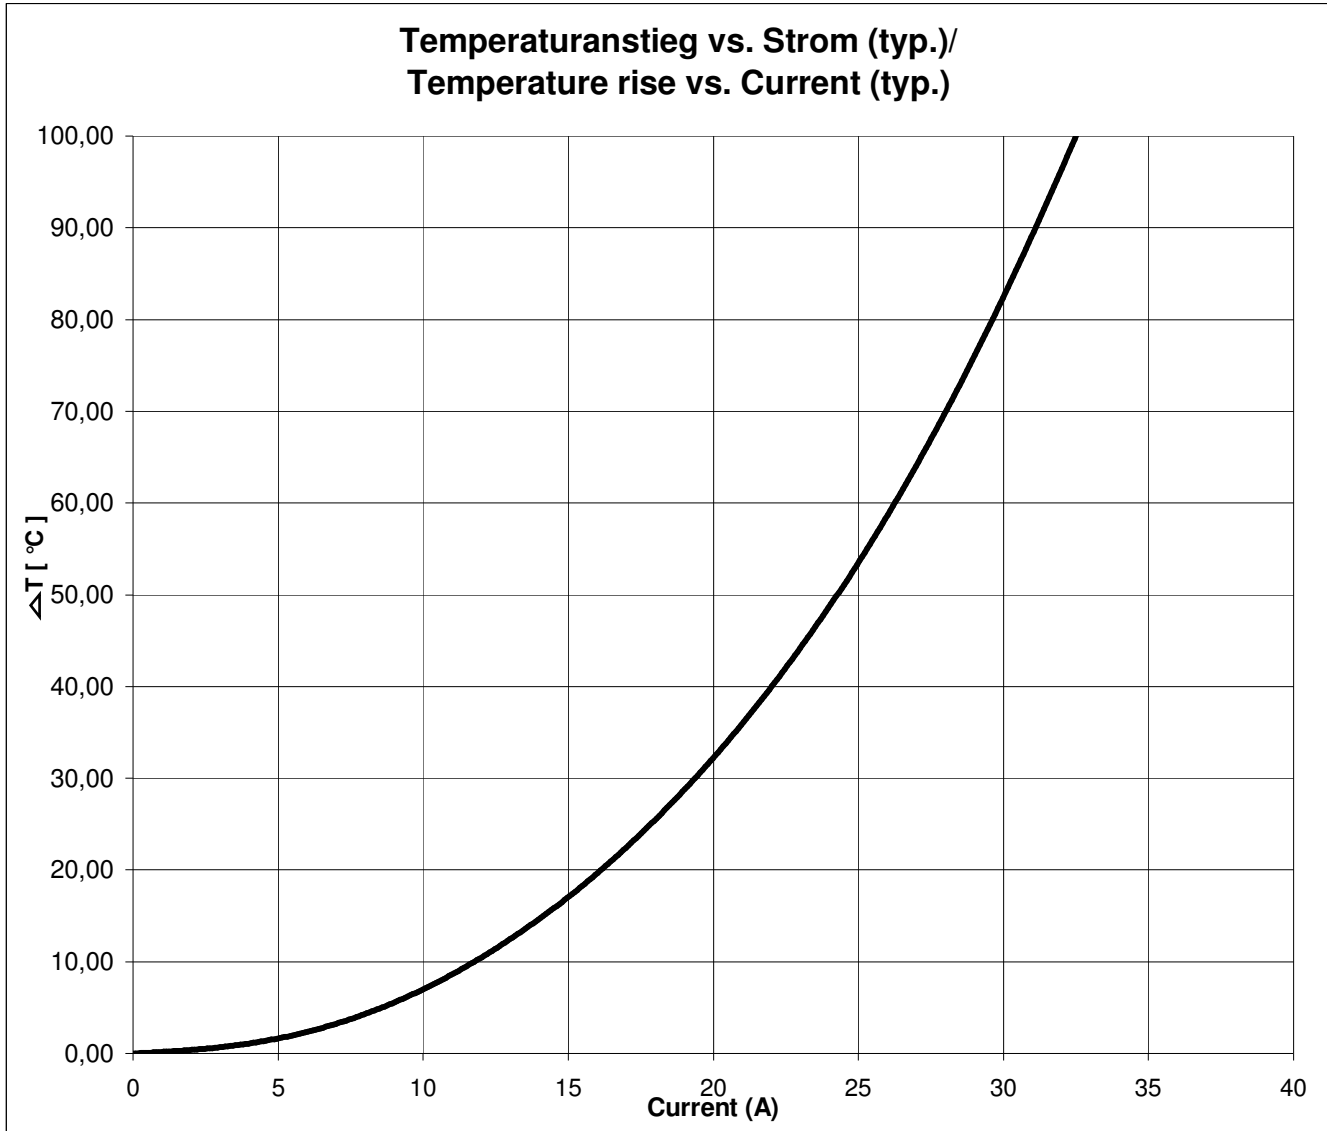

|                                     |                          |           |          |                         |              |
|-------------------------------------|--------------------------|-----------|----------|-------------------------|--------------|
| Freigabe erteilt / general release: | Kunde / customer         |           |          |                         |              |
|                                     |                          |           |          |                         |              |
|                                     |                          |           |          |                         |              |
|                                     |                          |           |          |                         |              |
| Datum / date                        | Unterschrift / signature |           |          |                         |              |
|                                     | Würth Elektronik         |           |          |                         |              |
|                                     | BD                       | Version 2 | 09-11-03 |                         |              |
|                                     | Rst                      | Version 1 | 09-05-05 |                         |              |
| Geprüft / checked                   | Kontrolliert / approved  |           | Name     | Änderung / modification | Datum / date |

**Würth Elektronik eiSos GmbH & Co. KG**

D-74638 Waldenburg · Max-Eyth-Strasse 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400  
<http://www.we-online.de>

# Spezifikation für Freigabe / specification for release

Kunde / customer :

Artikelnummer / part number :

7443320082

LF



Bezeichnung : **SPEICHERDROSSEL WE-HCC 1210 (Ferrit)**


description : **POWER-CHOKE WE-HCC 1210 (Ferrite)**

**WÜRTH ELEKTRONIK**


**DATUM / DATE : 2009-11-03**

## J Rollenspezifikation / tape and reel specification:

## Gurtspezifikation / Tape specification:

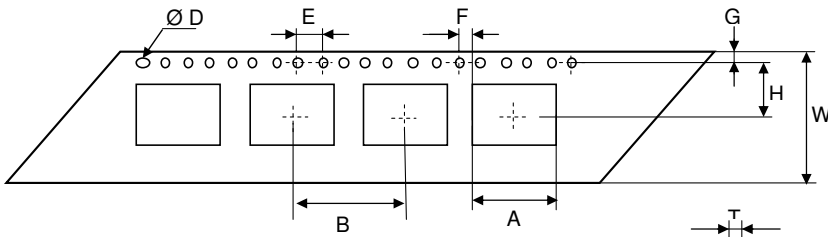


|   |             |    |
|---|-------------|----|
| A | 11,8 ± 0,1  | mm |
| B | 20 ± 0,1    | mm |
|   |             | mm |
| D | 1,50 ± 0,1  | mm |
| E | 4,00 ± 0,1  | mm |
| F | 2,00 ± 0,1  | mm |
| G | 1,75 ± 0,1  | mm |
| H | 11,5 ± 0,1  | mm |
|   |             | mm |
| J | 10,55 ± 0,1 | mm |
| T | 0,40 ± 0,05 | mm |
| W | 24,0 ± 0,3  | mm |

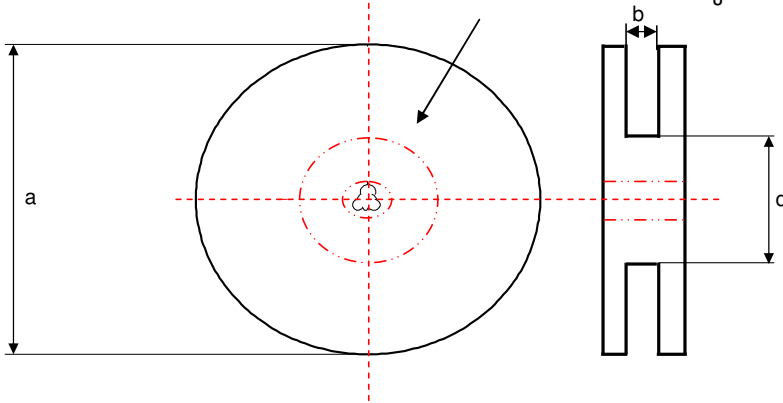

## Rollenspezifikation / Reel specification:

|   |           |    |
|---|-----------|----|
| a | 330,0 ref | mm |
| b | 24,0 ref  | mm |
|   |           | mm |
| d | 75 ± 2    | mm |

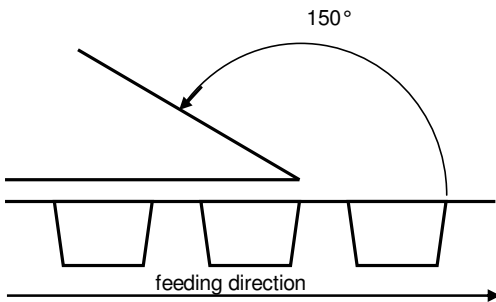

The Force for tearing off cover tape is 20 to 70 grams in arrow direction

Freigabe erteilt / general release:

Kunde / customer

Datum / date

Unterschrift / signature

Würth Elektronik

Geprüft / checked

Kontrolliert / approved

|      |                         |              |
|------|-------------------------|--------------|
|      |                         |              |
|      |                         |              |
|      |                         |              |
|      |                         |              |
| BD   | Version 2               | 09-11-03     |
| Rst  | Version 1               | 09-05-05     |
| Name | Änderung / modification | Datum / date |

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

**Würth Elektronik eiSos GmbH & Co. KG**

D-74638 Waldenburg · Max-Eyth-Strasse 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400

<http://www.we-online.com>