

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:


0679260015

Status:

Active

Description:

3.81mm (.150") Pitch Serial ATA IDT Power Receptacle, 0.38mm (15m") Gold (Au) Plating, 18AWG, without Latch, with Bump, Lead free

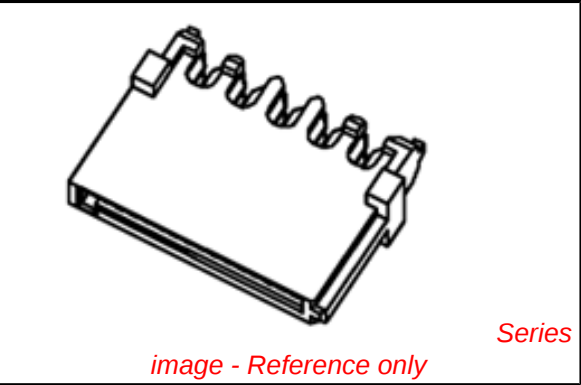

Documents:

3D Model

RoHS Certificate of Compliance (PDF)

Drawing (PDF)

General	
Product Family	IDT and Solder Connectors
Series	67926
Crimp Quality Equipment	Yes
Product Name	Serial ATA
Use With	67926-0040 Feed-to Cover, 67926-0041 Feed-Through Cover
Physical	
Circuits (Loaded)	5
Color - Resin	Black
Durability (mating cycles max)	50
Gender	Female
Glow-Wire Compliant	No
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Number of Rows	1
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface (in)	0.150 In
Pitch - Mating Interface (mm)	3.81 mm
Pitch - Term. Interface (in)	0.150 In
Pitch - Term. Interface (mm)	3.81 mm
Plating min: Mating (µin)	15
Plating min: Mating (µm)	0.38
Plating min: Termination (µin)	75
Plating min: Termination (µm)	1.90
Polarized to Mating Part	Yes
Temperature Range - Operating	-35°C to +85°C
Wire Size AWG	18
Electrical	
Current - Maximum per Contact	1.5A
Voltage - Maximum	15V DC
Solder Process Data	
Process Temperature max. C	230
Material Info	
Reference - Drawing Numbers	
Sales Drawing	SD-67926-001

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Not Reviewed

Halogen-Free Status

Not Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

67926Series

Mates With

87679




Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Insertion Tool for 3.96mm (.156") Pitch KK® IDT Crimp Terminals	0638133503

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

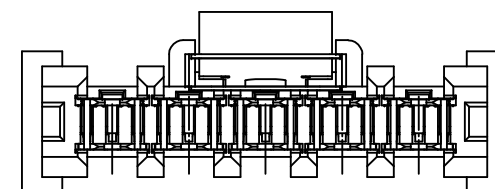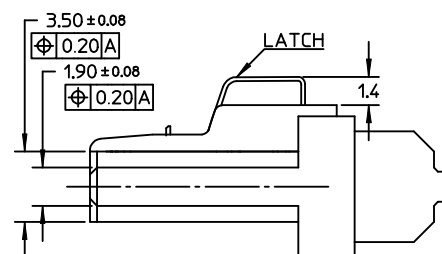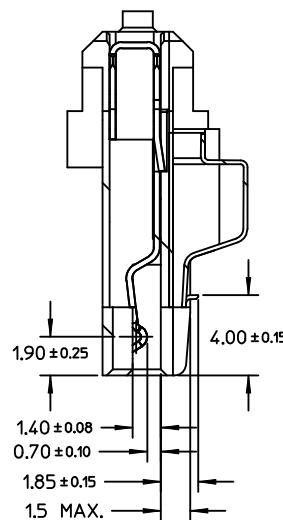

8. PRODUCT COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV DIRECTIVE 2000/53/EC

tb_frame_A3_P_AM_T
Rev. D 2004/06/28

10

9

8

7

6



5

4


3

2

1

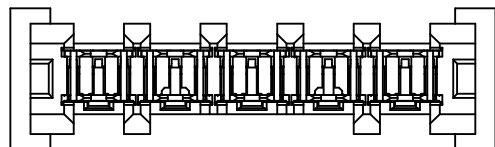


WITHOUT LATCH TYPE





Detail2


SCALE 20:1

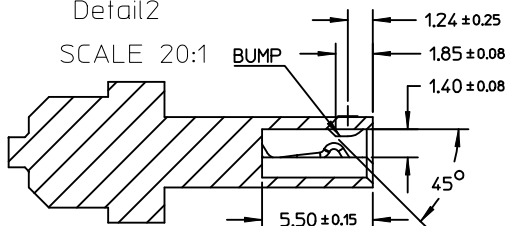

SECTION B-B

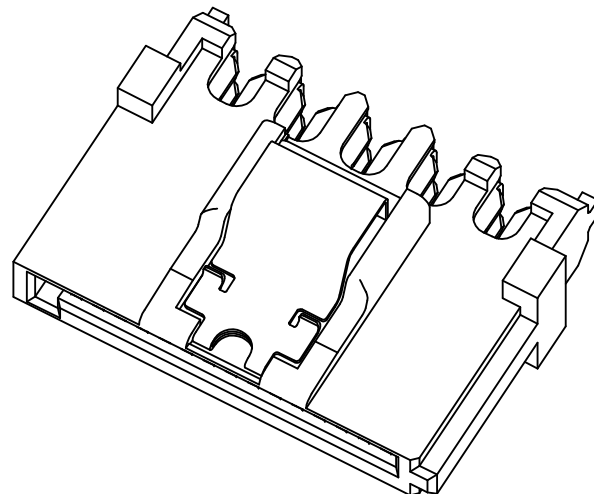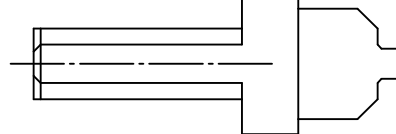

See Detail2

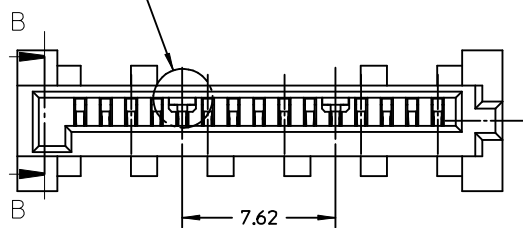

NOTES:

OTHER INFORMATION REFER TO SHEET 1

REVISED EC NO: SH2009-0098 DRWN: CWTANG CHKD: XJONG APPR: HWANG	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
					DRAWN BY GRATE MA	DATE 2004/01/17	TITLE SERIAL ATA POWER CONNECTOR IDT TYPE				
					CHECKED BY YAJUN	DATE 2004/01/17					
					APPROVED BY SAM	DATE 2004/01/17					
			ANGULAR ± 1 °		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-67926-001		SHEET NO. 2 OF 3		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

F

E

D

C

B

A

F

E

D

C

B

A

P/N	RECOMMENDED WIRE SIZE	PLATE TYPE	REMARK
67926-0001	18AWG	GOLD FLASH	WITH LATCH,WITHOUT BUMP
67926-0301	20AWG		
67926-0401	22AWG		
67926-0002	18AWG	0.76 MICRON GOLD PLATED	
67926-0302	20AWG		
67926-0402	22AWG		
67926-0005	18AWG	0.38 MICRON GOLD PLATED	
67926-0305	20AWG		
67926-0405	22AWG		
67926-0021	18AWG	GOLD FLASH	WITH LATCH,WITH BUMP
67926-0321	20AWG		
67926-0421	22AWG		
67926-0022	18AWG	0.76 MICRON GOLD PLATED	
67926-0322	20AWG		
67926-0422	22AWG		
67926-0025	18AWG	0.38 MICRON GOLD PLATED	
67926-0325	20AWG		
67926-0425	22AWG		
67926-0011	18AWG	GOLD FLASH	WITHOUT LATCH,WITH BUMP
67926-0311	20AWG		
67926-0411	22AWG		
67926-0012	18AWG	0.76 MICRON GOLD PLATED	
67926-0312	20AWG		
67926-0412	22AWG		
67926-0015	18AWG	0.38 MICRON GOLD PLATED	
67926-0315	20AWG		
67926-0415	22AWG		

REVISED

EC NO: SH2009-0098

DRWN: CWTANG

CHKD: XJSONG

APPR: HWWANG

2008/09/26

2008/09/30

2008/11/01

DESCRIPTION

REV

QUALITY SYMBOLS

=0

=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.25	± ---
1 PLACE	± 0.3	± ---

ANGULAR ± 1 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE

MM ONLY

DRAWN BY	DATE
GRATE MA	2004/01/17
CHECKED BY	DATE
YAJUN	2004/01/17
APPROVED BY	DATE
SAM	2004/01/17

MATERIAL NO.

SEE CHART

SIZE

A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE

4:1

DESIGN UNITS

METRIC

THIRD ANGLE PROJECTION

TITLE

SERIAL ATA
POWER CONNECTOR
IDT TYPE

MOLEX INCORPORATED

DOCUMENT NO.

SD-67926-001

SHEET NO.

3 OF 3