

KZN Series

- Adoption of innovative high stability electrolyte
- High ripple current and long endurance
- Rated voltage range : 6.3 to 100V_{dc}, Capacitance range : 8.2 to 22,000μF
- Endurance with ripple current : 6,000 to 10,000 hours at 105°C
- Non solvent resistant type
- RoHS Compliant





SPECIFICATIONS

Items	Characteristics									
Category	Temperature Range									
Rated Voltage Range	-40 to +105°C									
Capacitance Tolerance	6.3 to 100V _{dc}									
Leakage Current	±20% (M) (at 20°C, 120Hz)									
Dissipation Factor (tanδ)	I=0.01CV or 3μA, whichever is greater.									
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)									
	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V
	tanδ (Max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.09	0.08
Low Temperature Characteristics	When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)									
	Z(-25°C)/Z(+20°C)	2 max.								
Endurance	Z(-40°C)/Z(+20°C)	3 max.	(at 120Hz)							
	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for the specified period of time at 105°C.									
	Time	Case size	φ 5 & φ 6.3	φ 8×11.5L	φ 10×12.5L	φ 8×15L, 20L	φ 10×16L, 20L, 25L φ 12.5 to φ 18			
		6.3V _{dc}	6,000 hours	8,000 hours	9,000 hours	9,000 hours	10,000 hours			
10 to 50V _{dc}		7,000 hours	9,000 hours	9,000 hours	10,000 hours	10,000 hours				
63 to 100V _{dc}		6,000 hours	8,000 hours	9,000 hours	9,000 hours	10,000 hours				
Shelf Life	Capacitance change	≤ ±25% of the initial value (6.3, 10V _{dc} : ≤ ±30%)								
	D.F. (tanδ)	≤200% of the initial specified value								
	Leakage current	≤The initial specified value								

DIMENSIONS [mm]


- Terminal Code : E

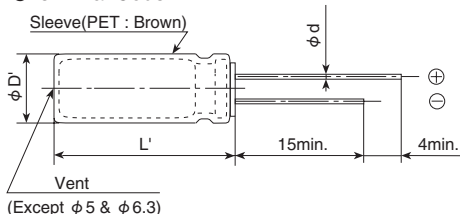

φ D	5	6.3	8	10	12.5	16	18
φ d	0.5	0.5	0.6	0.6	0.6	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
D'	φ D + 0.5max.						
L'	L + 1.5max.						

Gas escape end seal

PART NUMBERING SYSTEM

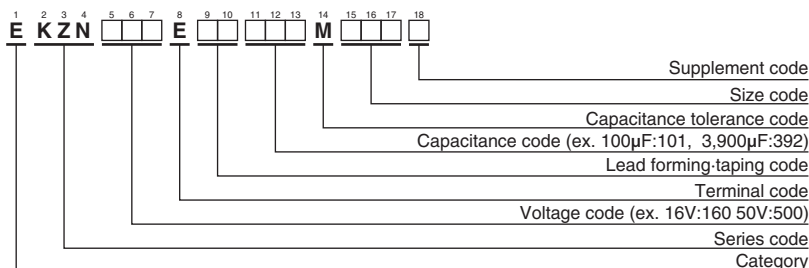

Please refer to "Product code guide (radial lead type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Impedance (Ωmax/100kHz)		Rated ripple current (mA _{rms} /105°C, 100kHz)	Part No.
			20°C	-10°C		
6.3	220	5×11	0.38	1.2	345	EKZN6R3E□□221ME11D
	470	6.3×11	0.17	0.51	540	EKZN6R3E□□471MF11D
	820	8×11.5	0.075	0.23	945	EKZN6R3E□□821MHB5D
	1,200	8×15	0.059	0.18	1,250	EKZN6R3E□□122MH15D
	1,200	10×12.5	0.053	0.16	1,330	EKZN6R3E□□122MJC5S
	1,500	8×20	0.041	0.13	1,500	EKZN6R3E□□152MH20D
	1,800	10×16	0.038	0.12	1,760	EKZN6R3E□□182MJ16S
	2,700	10×20	0.028	0.084	1,960	EKZN6R3E□□272MJ20S
	2,700	12.5×16	0.035	0.11	1,900	EKZN6R3E□□272MK16S
	3,300	10×25	0.026	0.072	2,250	EKZN6R3E□□332MJ25S
	3,900	12.5×20	0.025	0.075	2,480	EKZN6R3E□□392MK20S
	5,600	12.5×25	0.019	0.057	2,900	EKZN6R3E□□562MK25S
	6,800	12.5×30	0.018	0.054	3,450	EKZN6R3E□□682MK30S
	6,800	16×20	0.021	0.063	3,250	EKZN6R3E□□682ML20S
	8,200	12.5×35	0.016	0.048	3,570	EKZN6R3E□□822MK35S
	8,200	18×20	0.020	0.060	3,450	EKZN6R3E□□822MM20S
	10,000	16×25	0.017	0.051	3,630	EKZN6R3E□□103ML25S
	12,000	16×31.5	0.016	0.048	4,100	EKZN6R3E□□123MLN3S
	12,000	18×25	0.016	0.048	3,880	EKZN6R3E□□123MM25S
	15,000	16×35.5	0.014	0.042	4,280	EKZN6R3E□□153MLP1S
	15,000	18×31.5	0.014	0.042	4,190	EKZN6R3E□□153MMN3S
	18,000	16×40	0.013	0.039	4,580	EKZN6R3E□□183ML40S
	18,000	18×35.5	0.012	0.036	4,380	EKZN6R3E□□183MMP1S
	22,000	18×40	0.011	0.033	4,960	EKZN6R3E□□223MM40S
10	150	5×11	0.38	1.2	450	EKZN100E□□151ME11D
	330	6.3×11	0.17	0.51	700	EKZN100E□□331MF11D
	560	8×11.5	0.075	0.23	1,200	EKZN100E□□561MHB5D
	820	8×15	0.059	0.18	1,600	EKZN100E□□821MH15D
	1,000	8×20	0.041	0.13	1,960	EKZN100E□□102MH20D
	1,000	10×12.5	0.053	0.16	1,700	EKZN100E□□102MJC5S
	1,200	10×16	0.038	0.12	2,000	EKZN100E□□122MJ16S
	1,800	10×20	0.028	0.084	2,500	EKZN100E□□182MJ20S
	1,800	12.5×16	0.035	0.11	2,400	EKZN100E□□182MK16S
	2,200	10×25	0.026	0.072	2,900	EKZN100E□□222MJ25S
	2,700	12.5×20	0.025	0.075	2,600	EKZN100E□□272MK20S
	3,900	12.5×25	0.019	0.057	3,200	EKZN100E□□392MK25S
	4,700	12.5×30	0.018	0.054	3,660	EKZN100E□□472MK30S
	4,700	16×20	0.021	0.063	3,330	EKZN100E□□472ML20S
	5,600	12.5×35	0.016	0.048	4,120	EKZN100E□□562MK35S
	5,600	18×20	0.020	0.060	3,450	EKZN100E□□562MM20S
	6,800	16×25	0.017	0.051	3,810	EKZN100E□□682ML25S
	8,200	16×31.5	0.016	0.048	4,100	EKZN100E□□822MLN3S
	8,200	18×25	0.016	0.048	3,880	EKZN100E□□822MM25S
	10,000	16×35.5	0.014	0.042	4,280	EKZN100E□□103MLP1S
	10,000	18×31.5	0.014	0.042	4,190	EKZN100E□□103MMN3S
	12,000	16×40	0.013	0.039	4,580	EKZN100E□□123ML40S
	12,000	18×35.5	0.012	0.036	4,380	EKZN100E□□123MMP1S
	15,000	18×40	0.011	0.033	4,960	EKZN100E□□153MM40S
16	120	5×11	0.38	1.2	450	EKZN160E□□121ME11D
	270	6.3×11	0.17	0.51	700	EKZN160E□□271MF11D
	470	8×11.5	0.075	0.23	1,200	EKZN160E□□471MHB5D
	680	8×15	0.059	0.18	1,600	EKZN160E□□681MH15D
	680	10×12.5	0.053	0.16	1,700	EKZN160E□□681MJC5S
	820	8×20	0.041	0.13	1,960	EKZN160E□□821MH20D
	1,000	10×16	0.038	0.12	2,000	EKZN160E□□102MJ16S
	1,500	10×20	0.028	0.084	2,500	EKZN160E□□152MJ20S
	1,500	12.5×16	0.035	0.11	2,400	EKZN160E□□152MK16S
	1,800	10×25	0.026	0.072	2,900	EKZN160E□□182MJ25S
	2,200	12.5×20	0.025	0.075	2,600	EKZN160E□□222MK20S
	2,700	12.5×25	0.019	0.057	3,200	EKZN160E□□272MK25S
	3,300	12.5×30	0.018	0.054	3,660	EKZN160E□□332MK30S
	3,900	12.5×35	0.016	0.048	4,120	EKZN160E□□392MK35S
	3,900	16×20	0.021	0.063	3,330	EKZN160E□□392ML20S
	4,700	18×20	0.020	0.060	3,450	EKZN160E□□472MM20S
	5,600	16×25	0.017	0.051	3,810	EKZN160E□□562ML25S
	6,800	16×31.5	0.016	0.048	4,100	EKZN160E□□682MLN3S
	8,200	18×25	0.016	0.048	3,880	EKZN160E□□822MM25S
	10,000	16×35.5	0.014	0.042	4,280	EKZN160E□□103MLP1S
	10,000	18×31.5	0.014	0.042	4,190	EKZN160E□□103MMN3S
	12,000	16×40	0.013	0.039	4,580	EKZN160E□□123ML40S
	12,000	18×35.5	0.012	0.036	4,380	EKZN160E□□123MMP1S
	15,000	18×40	0.011	0.033	4,960	EKZN160E□□153MM40S
16	120	5×11	0.38	1.2	450	EKZN160E□□121ME11D
	270	6.3×11	0.17	0.51	700	EKZN160E□□271MF11D
	470	8×11.5	0.075	0.23	1,200	EKZN160E□□471MHB5D
	680	8×15	0.059	0.18	1,600	EKZN160E□□681MH15D
	680	10×12.5	0.053	0.16	1,700	EKZN160E□□681MJC5S
	820	8×20	0.041	0.13	1,960	EKZN160E□□821MH20D
	1,000	10×16	0.038	0.12	2,000	EKZN160E□□102MJ16S
	1,500	10×20	0.028	0.084	2,500	EKZN160E□□152MJ20S
	1,500	12.5×16	0.035	0.11	2,400	EKZN160E□□152MK16S
	1,800	10×25	0.026	0.072	2,900	EKZN160E□□182MJ25S
	2,200	12.5×20	0.025	0.075	2,600	EKZN160E□□222MK20S
	2,700	12.5×25	0.019	0.057	3,200	EKZN160E□□272MK25S
	3,300	12.5×30	0.018	0.054	3,660	EKZN160E□□332MK30S
	3,900	12.5×35	0.016	0.048	4,120	EKZN160E□□392MK35S
	3,900	16×20	0.021	0.063	3,330	EKZN160E□□392ML20S
	4,700	18×20	0.020	0.060	3,450	EKZN160E□□472MM20S
	5,600	16×25	0.017	0.051	3,810	EKZN160E□□562ML25S
	6,800	16×31.5	0.016	0.048	4,100	EKZN160E□□682MLN3S
	8,200	18×25	0.016	0.048	3,880	EKZN160E□□822MM25S
	10,000	16×35.5	0.014	0.042	4,280	EKZN160E□□103MLP1S
	10,000	18×31.5	0.014	0.042	4,190	EKZN160E□□103MMN3S
	12,000	16×40	0.013	0.039	4,580	EKZN160E□□123ML40S
	12,000	18×35.5	0.012	0.036	4,380	EKZN160E□□123MMP1S
	15,000	18×40	0.011	0.033	4,960	EKZN160E□□153MM40S
16	120	5×11	0.38	1.2	450	EKZN160E□□121ME11D
	270	6.3×11	0.17	0.51	700	EKZN160E□□271MF11D
	470	8×11.5	0.075	0.23	1,200	EKZN160E□□471MHB5D
	680	8×15	0.059	0.18	1,600	EKZN160E□□681MH15D
	680	10×12.5	0.053	0.16	1,700	EKZN160E□□681MJC5S
	820	8×20	0.041	0.13	1,960	EKZN160E□□821MH20D
	1,000	10×16	0.038	0.12	2,000	EKZN160E□□102MJ16S
	1,500	10×20	0.028	0.084	2,500	EKZN160E□□152MJ20S
	1,500	12.5×16	0.035	0.11	2,400	EKZN160E□□152MK16S
	1,800	10×25	0.026	0.072	2,900	EKZN160E□□182MJ25S
	2,200	12.5×20	0.025	0.075	2,600	EKZN160E□□222MK20S
	2,700	12.5×25	0.019	0.057	3,200	EKZN160E□□272MK25S
	3,300	12.5×30	0.018	0.054	3,660	EKZN160E□□332MK30S
	3,900	12.5×35	0.016	0.048	4,120	EKZN160E□□392MK35S
	3,900	16×20	0.021	0.063	3,330	EKZN160E□□392ML20S
	4,700	18×20	0.020	0.060	3,450	EKZN160E□□472MM20S
	5,600	16×25	0.017	0.051	3,810	EKZN160E□□562ML25S
	6,800	16×31.5	0.016	0.048	4,100	EKZN160E□□682MLN3S
	8,200	18×25	0.016	0.048	3,880	EKZN160E□□822MM25S
	10,000	16×35.5	0.014	0.042	4,280	EKZN160E□□103MLP1S
	10,000	18×31.5	0.014	0.042	4,190	EKZN160E□□103MMN3S
	12,000	16×40	0.013	0.039	4,580	EKZN160E□□123ML40S
	12,000	18×35.5	0.012	0.036	4,380	EKZN160E□□123MMP1S
	15,000	18×40	0.011	0.033	4,960	EKZN160E□□153MM40S
16	120	5×11	0.38	1.2	450	EKZN160E□□121ME11D
	270	6.3×11	0.17	0.51	700	EKZN160E□□271MF11D
	470	8×11.5	0.075	0.23	1,200	EKZN160E□□471MHB5D
	680	8×15	0.059	0.18	1,600	EKZN160E□□681MH15D
	680	10×12.5	0.053	0.16	1,700	EKZN160E□□681MJC5S
	820	8×20	0.041	0.13	1,960	EKZN160E□□821MH20D
	1,000	10×16	0.038	0.12	2,000	EKZN160E□□102MJ16S
	1,500	10×20	0.028	0.084	2,500	EKZN160E□□152MJ20S
	1,500	12.5×16	0.035	0.11	2,400	EKZN160E□□152MK16S
	1,800	10×25	0.026	0.072	2,900	EKZN160E□□182MJ25S
	2,200	12.5×20	0.025	0.075	2,600	EKZN160E□□222MK20S
	2,700	12.5×25	0.019	0.057	3,200	EKZN160E□□272MK25S
	3,300	12.5×30	0.018	0.054	3,660	EKZN160E□□332MK30S
	3,900	12.5×35	0.016	0.048	4,120	EKZN160E□□392MK35S
	3,900	16×20	0.021	0.063	3,330	EKZN160E□□392ML20S
	4,700	18×20	0.020	0.060	3,450	EKZN160E□□472MM20S
	5,600	16×25	0.017	0.051	3,810	EKZN160E□□562ML25S
	6,800	16×31.5	0.016	0.048	4,100	EKZN160E□□682MLN3S
	8,200	18×25	0.016	0.048	3,880	EKZN160E□□822MM25S
	10,000	16×35.5	0.014	0.042	4,280	EKZN160E□□103MLP1S
	10,000	18×31.5	0.014	0.042	4,190	EKZN160E□□103MMN3S
	12,000	16×40	0.013	0.039	4,580	EKZN160E□□123ML40S
	12,000	18×35.5	0.012	0.036	4,380	EKZN160E□□123MMP1S
	15,000	18×40	0.011	0.033	4,960	EKZN160E□□153MM40S
16	120	5×11	0.38	1.2	450	EKZN160E□□121ME11D
	270	6.3×11	0.17	0.51	700	EKZN160E□□271MF11D
	470	8×11.5	0.075	0.23	1,200	EKZN160E□□471MHB5D
	680	8×15	0.059	0.18	1,600	EKZN160E□□681MH15D
	680	10×12.5	0.053	0.16	1,700	EKZN160E□□681MJC5S
	820	8×20	0.041	0.13	1,960	EKZN160E□□821MH20D
	1,000	10×16	0.038	0.12	2,	

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Impedance (Ωmax/100kHz)		Rated ripple current (mA rms/ 105°C, 100kHz)	Part No.
			20°C	-10°C		
50	330	12.5×16	0.045	0.14	2,160	EKZN500E□□331MK16S
	390	10×25	0.032	0.10	2,420	EKZN500E□□391MJ25S
	470	12.5×20	0.032	0.10	2,300	EKZN500E□□471MK20S
	680	12.5×25	0.025	0.080	2,800	EKZN500E□□681MK25S
	820	12.5×30	0.023	0.074	3,370	EKZN500E□□821MK30S
	820	16×20	0.026	0.084	3,070	EKZN500E□□821ML20S
	1,000	12.5×35	0.021	0.067	3,810	EKZN500E□□102MK35S
	1,200	16×25	0.022	0.070	3,510	EKZN500E□□122ML25S
	1,200	18×20	0.025	0.075	3,120	EKZN500E□□122MM20S
	1,500	16×31.5	0.019	0.057	4,030	EKZN500E□□152MLN3S
	1,500	18×25	0.021	0.063	3,530	EKZN500E□□152MM25S
	1,800	16×35.5	0.016	0.048	4,220	EKZN500E□□182MLP1S
	2,200	16×40	0.014	0.042	4,500	EKZN500E□□222ML40S
	2,200	18×31.5	0.016	0.048	4,080	EKZN500E□□222MMN3S
	2,700	18×35.5	0.013	0.039	4,270	EKZN500E□□272MMP1S
	3,300	18×40	0.012	0.036	4,850	EKZN500E□□332MM40S
63	18	5×11	0.52	2.3	240	EKZN630E□□180ME11D
	39	6.3×11	0.24	1.1	420	EKZN630E□□390MF11D
	68	8×11.5	0.15	0.68	720	EKZN630E□□680MHB5D
	100	8×15	0.10	0.45	990	EKZN630E□□101MH15D
	120	8×20	0.077	0.35	1,200	EKZN630E□□121MH20D
	120	10×12.5	0.090	0.36	990	EKZN630E□□121MJC5S
	180	10×16	0.061	0.25	1,200	EKZN630E□□181MJ16S
	270	10×20	0.045	0.18	1,570	EKZN630E□□271MJ20S
	270	12.5×16	0.058	0.18	1,570	EKZN630E□□271MK16S
	330	10×25	0.037	0.12	1,990	EKZN630E□□331MJ25S
	390	12.5×20	0.033	0.10	1,990	EKZN630E□□391MK20S
	560	12.5×25	0.026	0.080	2,460	EKZN630E□□561MK25S
	680	12.5×30	0.024	0.075	2,760	EKZN630E□□681MK30S
	680	16×20	0.027	0.085	2,380	EKZN630E□□681ML20S
	820	12.5×35	0.022	0.068	3,040	EKZN630E□□821MK35S
	820	18×20	0.026	0.078	2,530	EKZN630E□□821MM20S
80	1,000	16×25	0.024	0.072	2,890	EKZN630E□□102ML25S
	1,200	16×31.5	0.020	0.060	3,280	EKZN630E□□122MLN3S
	1,200	18×25	0.022	0.066	2,930	EKZN630E□□122MM25S
	1,500	16×35.5	0.018	0.054	3,440	EKZN630E□□152MLP1S
	1,500	18×31.5	0.018	0.054	3,380	EKZN630E□□152MMN3S
	1,800	16×40	0.016	0.048	3,690	EKZN630E□□182ML40S
	1,800	18×35.5	0.017	0.051	3,550	EKZN630E□□182MMP1S
	2,200	18×40	0.015	0.045	3,930	EKZN630E□□222MM40S
	12	5×11	0.72	3.2	220	EKZN800E□□120ME11D
	27	6.3×11	0.34	1.5	370	EKZN800E□□270MF11D
	47	8×11.5	0.20	0.90	620	EKZN800E□□470MHB5D
	68	8×15	0.14	0.63	780	EKZN800E□□680MH15D
80	82	8×20	0.12	0.54	1,040	EKZN800E□□820MH20D
	82	10×12.5	0.14	0.56	780	EKZN800E□□820MJC5S
	120	10×16	0.090	0.36	1,040	EKZN800E□□121MJ16S
	180	10×20	0.068	0.28	1,430	EKZN800E□□181MJ20S
	180	12.5×16	0.090	0.27	1,430	EKZN800E□□181MK16S
	220	10×25	0.055	0.22	1,620	EKZN800E□□221MJ25S
	270	12.5×20	0.048	0.15	1,750	EKZN800E□□271MK20S
	390	12.5×25	0.038	0.12	2,210	EKZN800E□□391MK25S
	470	12.5×30	0.033	0.11	2,400	EKZN800E□□471MK30S
	470	16×20	0.036	0.12	1,950	EKZN800E□□471ML20S
	560	12.5×35	0.026	0.078	2,600	EKZN800E□□561MK35S
	680	16×25	0.028	0.084	2,430	EKZN800E□□681ML25S
	680	18×20	0.032	0.096	2,270	EKZN800E□□681MM20S
	820	16×31.5	0.022	0.066	2,640	EKZN800E□□821MLN3S
	820	18×25	0.027	0.081	2,500	EKZN800E□□821MMP1S
100	1,000	16×35.5	0.020	0.060	2,860	EKZN800E□□102MLP1S
	1,200	16×40	0.018	0.054	3,510	EKZN800E□□122ML40S
	1,200	18×31.5	0.020	0.060	2,860	EKZN800E□□122MMN3S
	1,500	18×35.5	0.018	0.054	3,510	EKZN800E□□152MMP1S
	1,800	18×40	0.017	0.051	3,860	EKZN800E□□182MM40S
	8.2	5×11	0.72	3.2	220	EKZN101E□□8R2ME11D
	18	6.3×11	0.34	1.5	370	EKZN101E□□180MF11D
	33	8×11.5	0.20	0.90	620	EKZN101E□□330MHB5D
	47	8×15	0.14	0.63	780	EKZN101E□□470MH15D
	56	8×20	0.12	0.54	1,040	EKZN101E□□560MH20D
	56	10×12.5	0.14	0.56	780	EKZN101E□□560MJC5S
	82	10×16	0.090	0.36	1,040	EKZN101E□□820MJ16S
	100	10×20	0.068	0.28	1,430	EKZN101E□□101MJ20S
	120	12.5×16	0.090	0.27	1,430	EKZN101E□□121MK16S
	150	10×25	0.055	0.22	1,620	EKZN101E□□151MJ25S
	180	12.5×20	0.048	0.15	1,750	EKZN101E□□181MK20S
100	220	12.5×25	0.038	0.12	2,210	EKZN101E□□221MK25S
	270	12.5×30	0.033	0.11	2,400	EKZN101E□□271MK30S
	270	16×20	0.036	0.12	1,950	EKZN101E□□271ML20S
	390	12.5×35	0.026	0.078	2,600	EKZN101E□□391MK35S
	390	16×25	0.028	0.084	2,430	EKZN101E□□391ML25S
	390	18×20	0.032	0.096	2,270	EKZN101E□□391MM20S
	470	16×31.5	0.022	0.066	2,640	EKZN101E□□471MLN3S
	560	16×35.5	0.020	0.060	2,860	EKZN101E□□561MMP1S
	560	18×25	0.027	0.081	2,500	EKZN101E□□561MM25S
	680	16×40	0.018	0.054	3,510	EKZN101E□□681ML40S
	680	18×31.5	0.020	0.060	2,860	EKZN101E□□681MMN3S
	820	18×35.5	0.018	0.054	3,510	EKZN101E□□821MMP1S
	1,000	18×40	0.017	0.051	3,860	EKZN101E□□102MM40S

□□ : Enter the appropriate lead forming or taping code.

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Capacitance (μF)	Frequency (Hz)	120	1k	10k	100k
8.2 to 180		0.40	0.75	0.90	1.00
220 to 560		0.50	0.85	0.94	1.00
680 to 1,800		0.60	0.87	0.95	1.00
2,200 to 3,900		0.75	0.90	0.95	1.00
4,700 to 22,000		0.85	0.95	0.98	1.00

Note : The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise.
When long life performance is required in actual use, the rms ripple current has to be reduced.