


4

3

2

1

used for: D-SUB COMBINATION

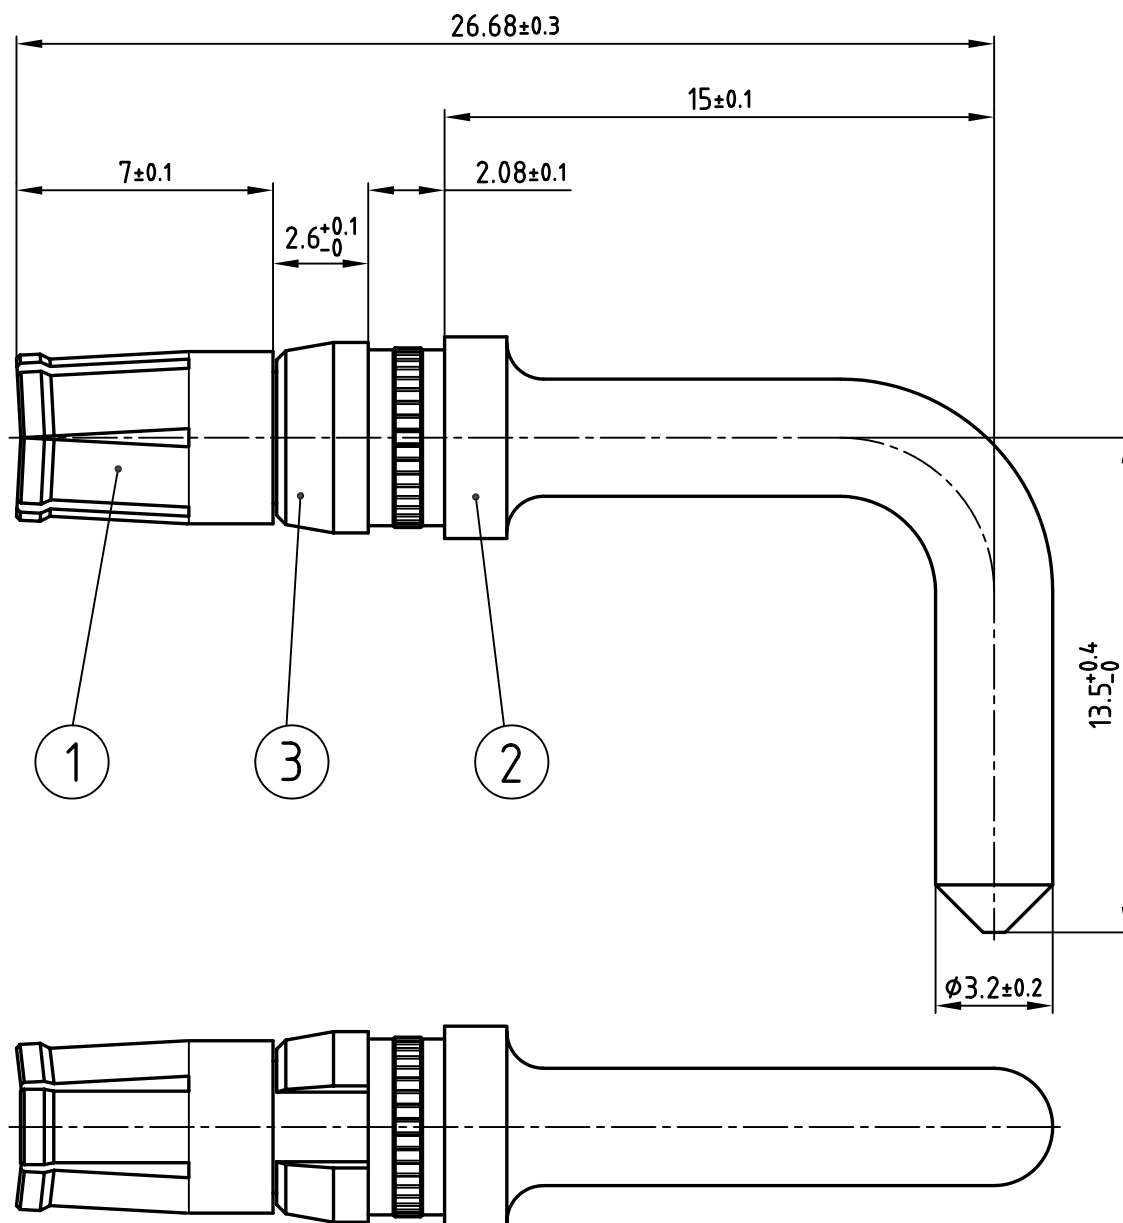

NOTES:

1. MATERIAL: COPPER ALLOY

2. PLATING:

ITEM 1: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL

ITEM 2: TIN PLATED

ITEM 3: NICKEL PLATED

Directive 2002/95/EC
"RoHS"
CompliantTHIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance ISO 2768-m			
				2001	date	name	
				drawn	08.10.	Parei	
				appd.	08.10.	E. Mickenbecker	
				norm			
				d-old			
rev.	description	date	name				

scale:	5:1		
material:	SEE NOTES		
title:	HIGH POWER CONTACT FEMALE SOLDER PIN 90°, Ø3.2, 30A D-SUB COMBINATION		
dwg no:	AutoCAD 2000	DIN-A	
13K1A363A		4	
		sh: 1/1	
part no:	132C13059X		

4

3

2

1