


D


C

B


A

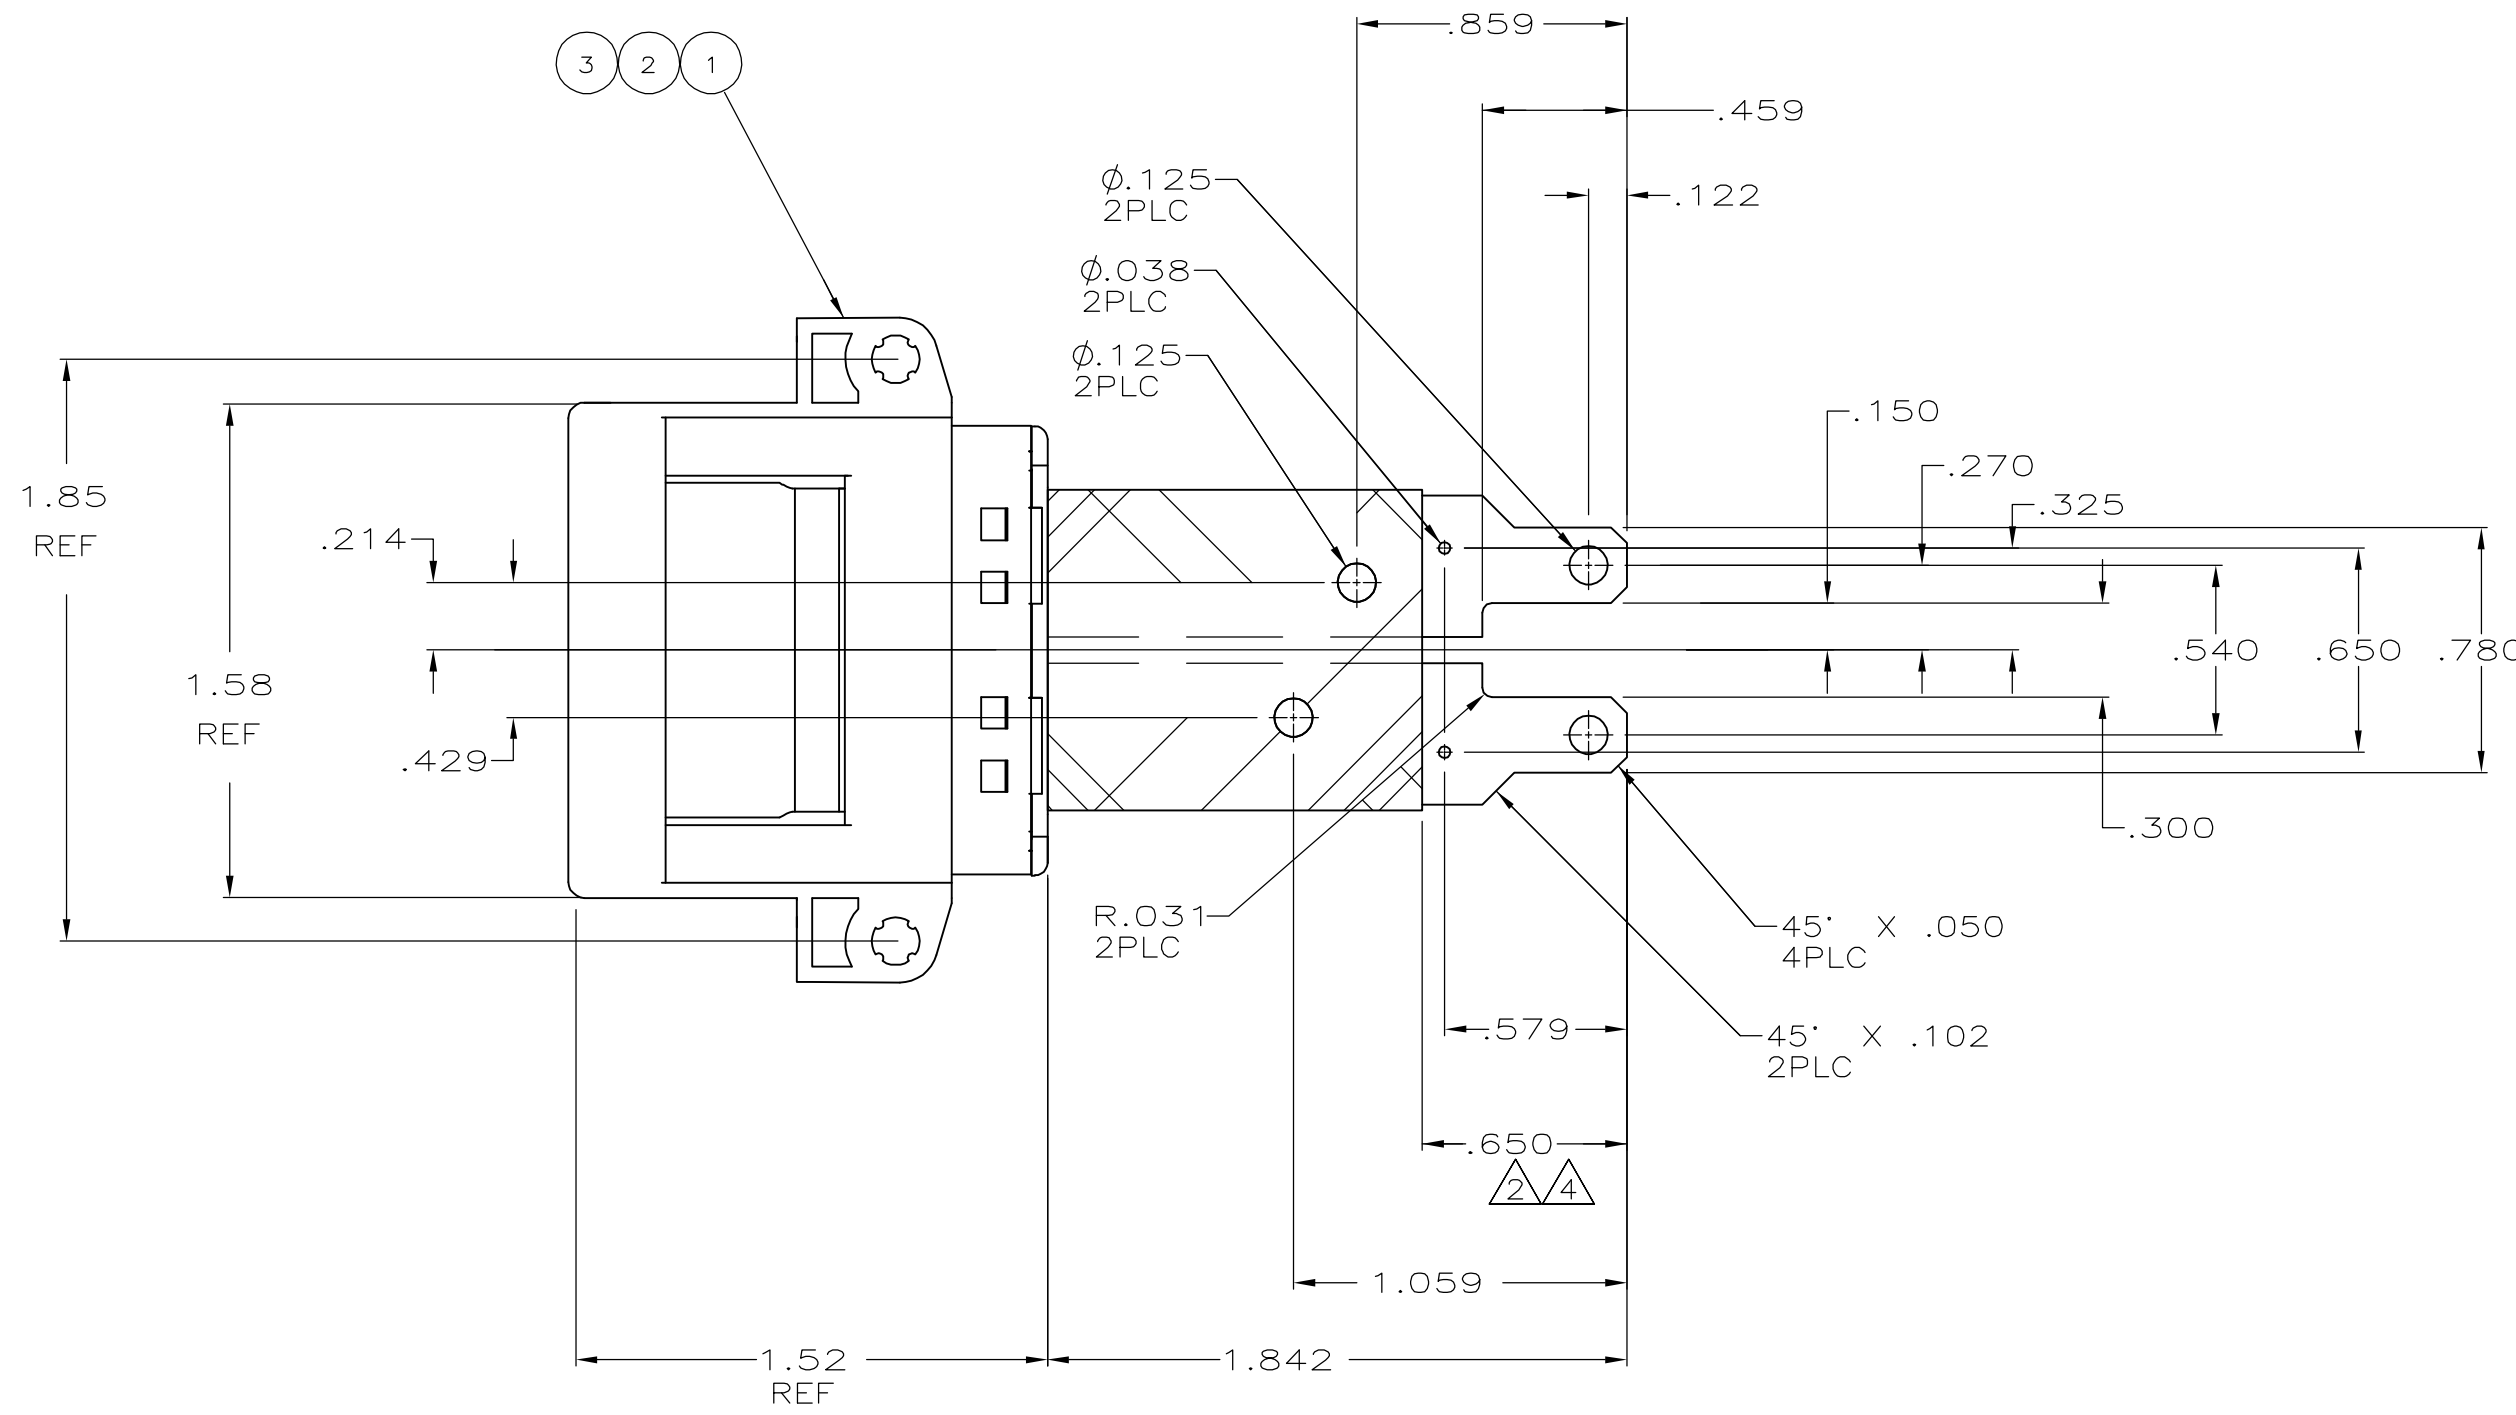

1. CABLE LENGTH TOLERANCE = 0.2% OF TOTAL CABLE LENGTH, WITH A MINIMUM TOLERANCE OF ±3.18 [.125].
I.E. 6096 [240.0] * .002 = ± 12.2 [.480]
- 2 INSULATION REMOVED IN THIS AREA.
- 3 LABEL APPROX. WHERE SHOWN PER AMP 2480.0903.MPI.
- 4 NO SOLDER ON STRIPPED CABLE END

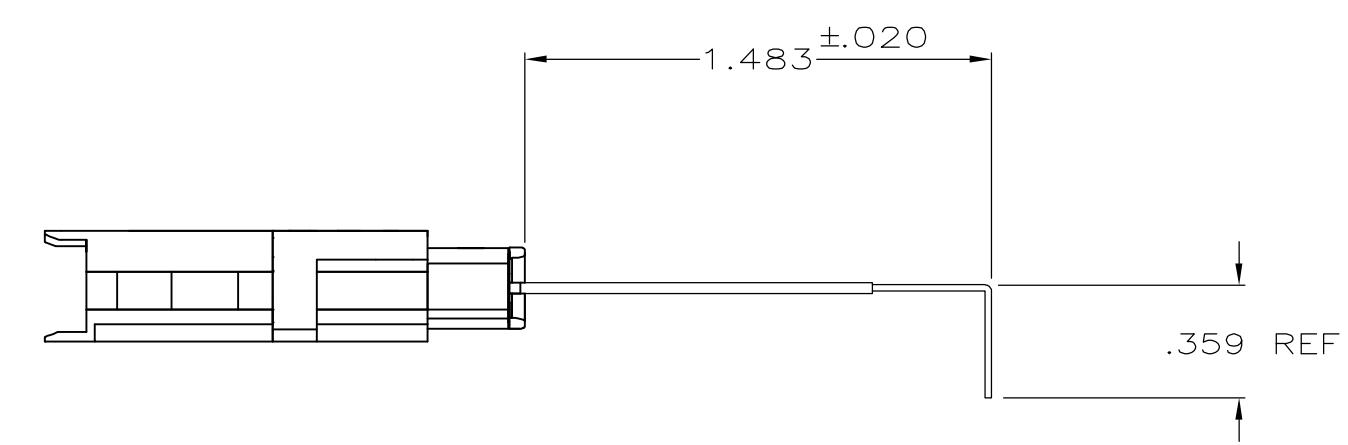

BEND DETAIL

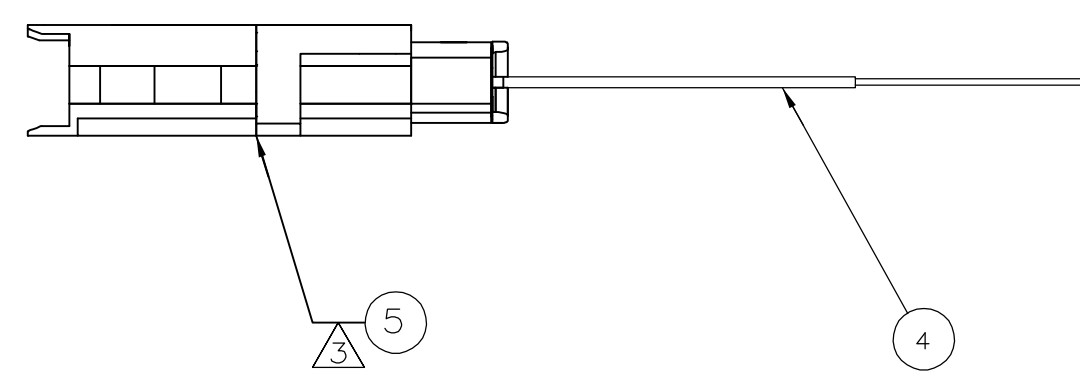

1	-	LABEL, WHITE, POLYESTER	5
-	2.65"	CABLE,.020 SPLIT,TEFZ,BLU	4
1	-	TRANS ASSY,CONTACT	3
1	-	STRAIN RELIEF	2
1	-	HOUSING, RECPT, W/FLANGE	1
-1	CABLE LENGTH	DESCRIPTION	ITEM NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	.1
2 PLC	±	.01
3 PLC	±	.005
4 PLC	±	-
ANGLES	±	-
FINISH	-	-

APVD

L.MAROLF

15-NOV-00

PRODUCT SPEC

APPLICATION SPEC

114-49005

WEIGHT

-

CUSTOMER DRAWING

DWN

J.C.BAKER

15-NOV-00

CHK

L.MAROLF

15-NOV-00

APVD

L.MAROLF

15-NOV-00

tyco Electronics

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

CABLE ASSEMBLY, WAVE CRIMP

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=766492

RESTRICTED TO

-

SCALE

2:1

SHEET

1 of 1

REV

A

D

C

B

A

766492