
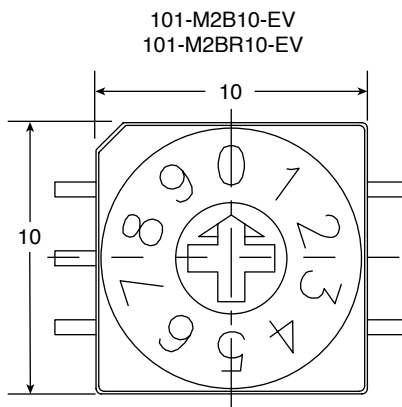
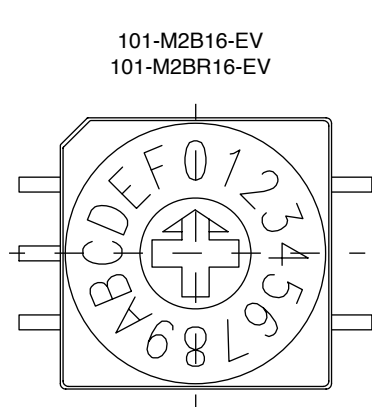
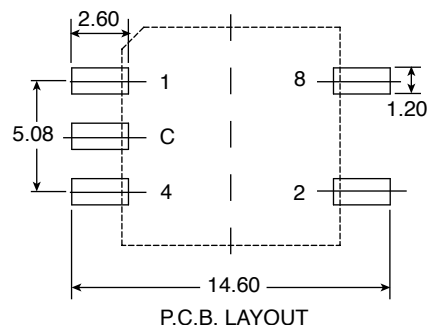
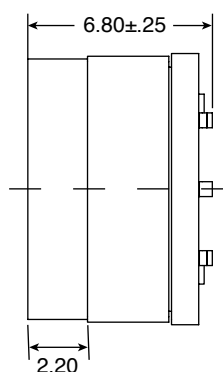


DIMENSIONS: mm

TYPE	CIRCUIT CHARACTERISTICS															
10 STEP	CODE	POSITION										X ON				
		0	1	2	3	4	5	6	7	8	9	A	B	C	D	E
	1		X		X		X		X		X					
	2			X	X			X	X							
	4					X	X	X	X							
16 STEP	8									X	X					
	CODE	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E
	1		X		X		X		X		X		X		X	
	2			X	X			X	X			X	X		X	
	4					X	X	X	X				X	X	X	
	8									X	X	X	X	X	X	

**Mechanical Specifications:**

- Operating Force: 400gf-cm Max.
- Operating Temperature: -60°C to 125°C

Electrical Specifications:

- Rating: Non Switching Rating 400mA/24VDC
Switching Rating 150mA/24VDC
- Initial Contact Resistance: 100mΩ Max.
- Dielectric Strength: 250VAC 1 Minute
- Insulation Resistance: 100MΩ Min. (250VDC Megger)

MOUSER STOCK NO.	Packaging
101-M2B10-EV	Tube
101-M2B16-EV	Tube
101-M2BR10-EV	Reel
101-M2BR16-EV	Reel

Note:

- RoHS Compliant

Coded Rotary Switches

101-M2B10-EV, 101-M2B16-EV, 101-M2BR10-EV,
101-M2BR16-EV

**Mountain
Switch**