


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes


6B




TERM. NO.'s FOR REF. ONLY
CUSTOMER TERM. NO.'s IN ()




DOT LOCATES TERM. #5(1)

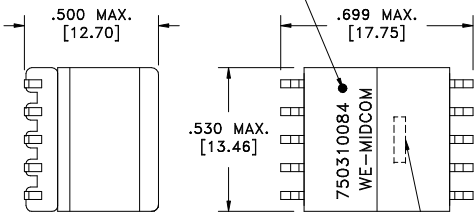

LOT CODE & DATE CODE

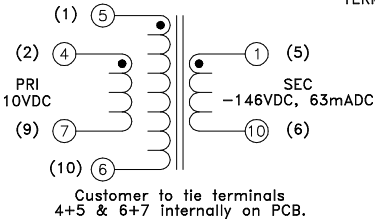

AREA REPRESENTS
TERMINAL PAD DIMENSIONS

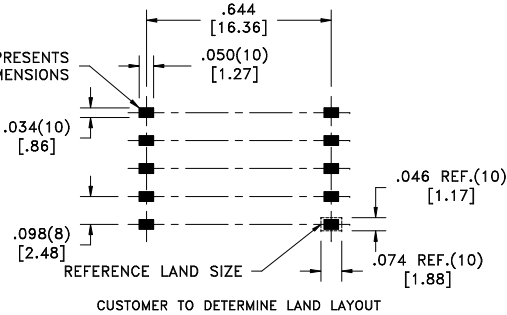

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS		VALUE
D.C. RESISTANCE	5-6	@20°C	0.032 ohms ±20%
D.C. RESISTANCE	4-7	@20°C	0.032 ohms ±20%
D.C. RESISTANCE	1-10	@20°C	0.285 ohms ±20%
INDUCTANCE	5-6	tie(4+5, 6+7), 100kHz, 100mVAC, Ls	2.70uH ±10%
DIELECTRIC	5-1	tie(4+5, 6+7), 625VAC, 1 second	500VAC, 1 minute
URNS RATIO	(1-10):(5-6), tie(4+5, 6+7)		4:1, ±1%

6D

6C GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C.

REV.	DATE
6D	4/08
6C	10/07
6B	7/07
6A	5/07

DETAILS SUBJECT TO CHANGE

Packaging Specifications Method: Tape & Reel PKG-0499 www.midcom-inc.com	6B Unless otherwise specified: Tolerances: Fractions: $\pm 1/64$ Angles: $\pm 1^\circ$ Decimals: $\pm .005[.127]$	DRAWING TITLE TRANSFORMER		DRAWING NO. 750310084	
	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750310084		REVISIONS: SEE SHEET 1	SCALE --- SHEET 2 OF 5

