


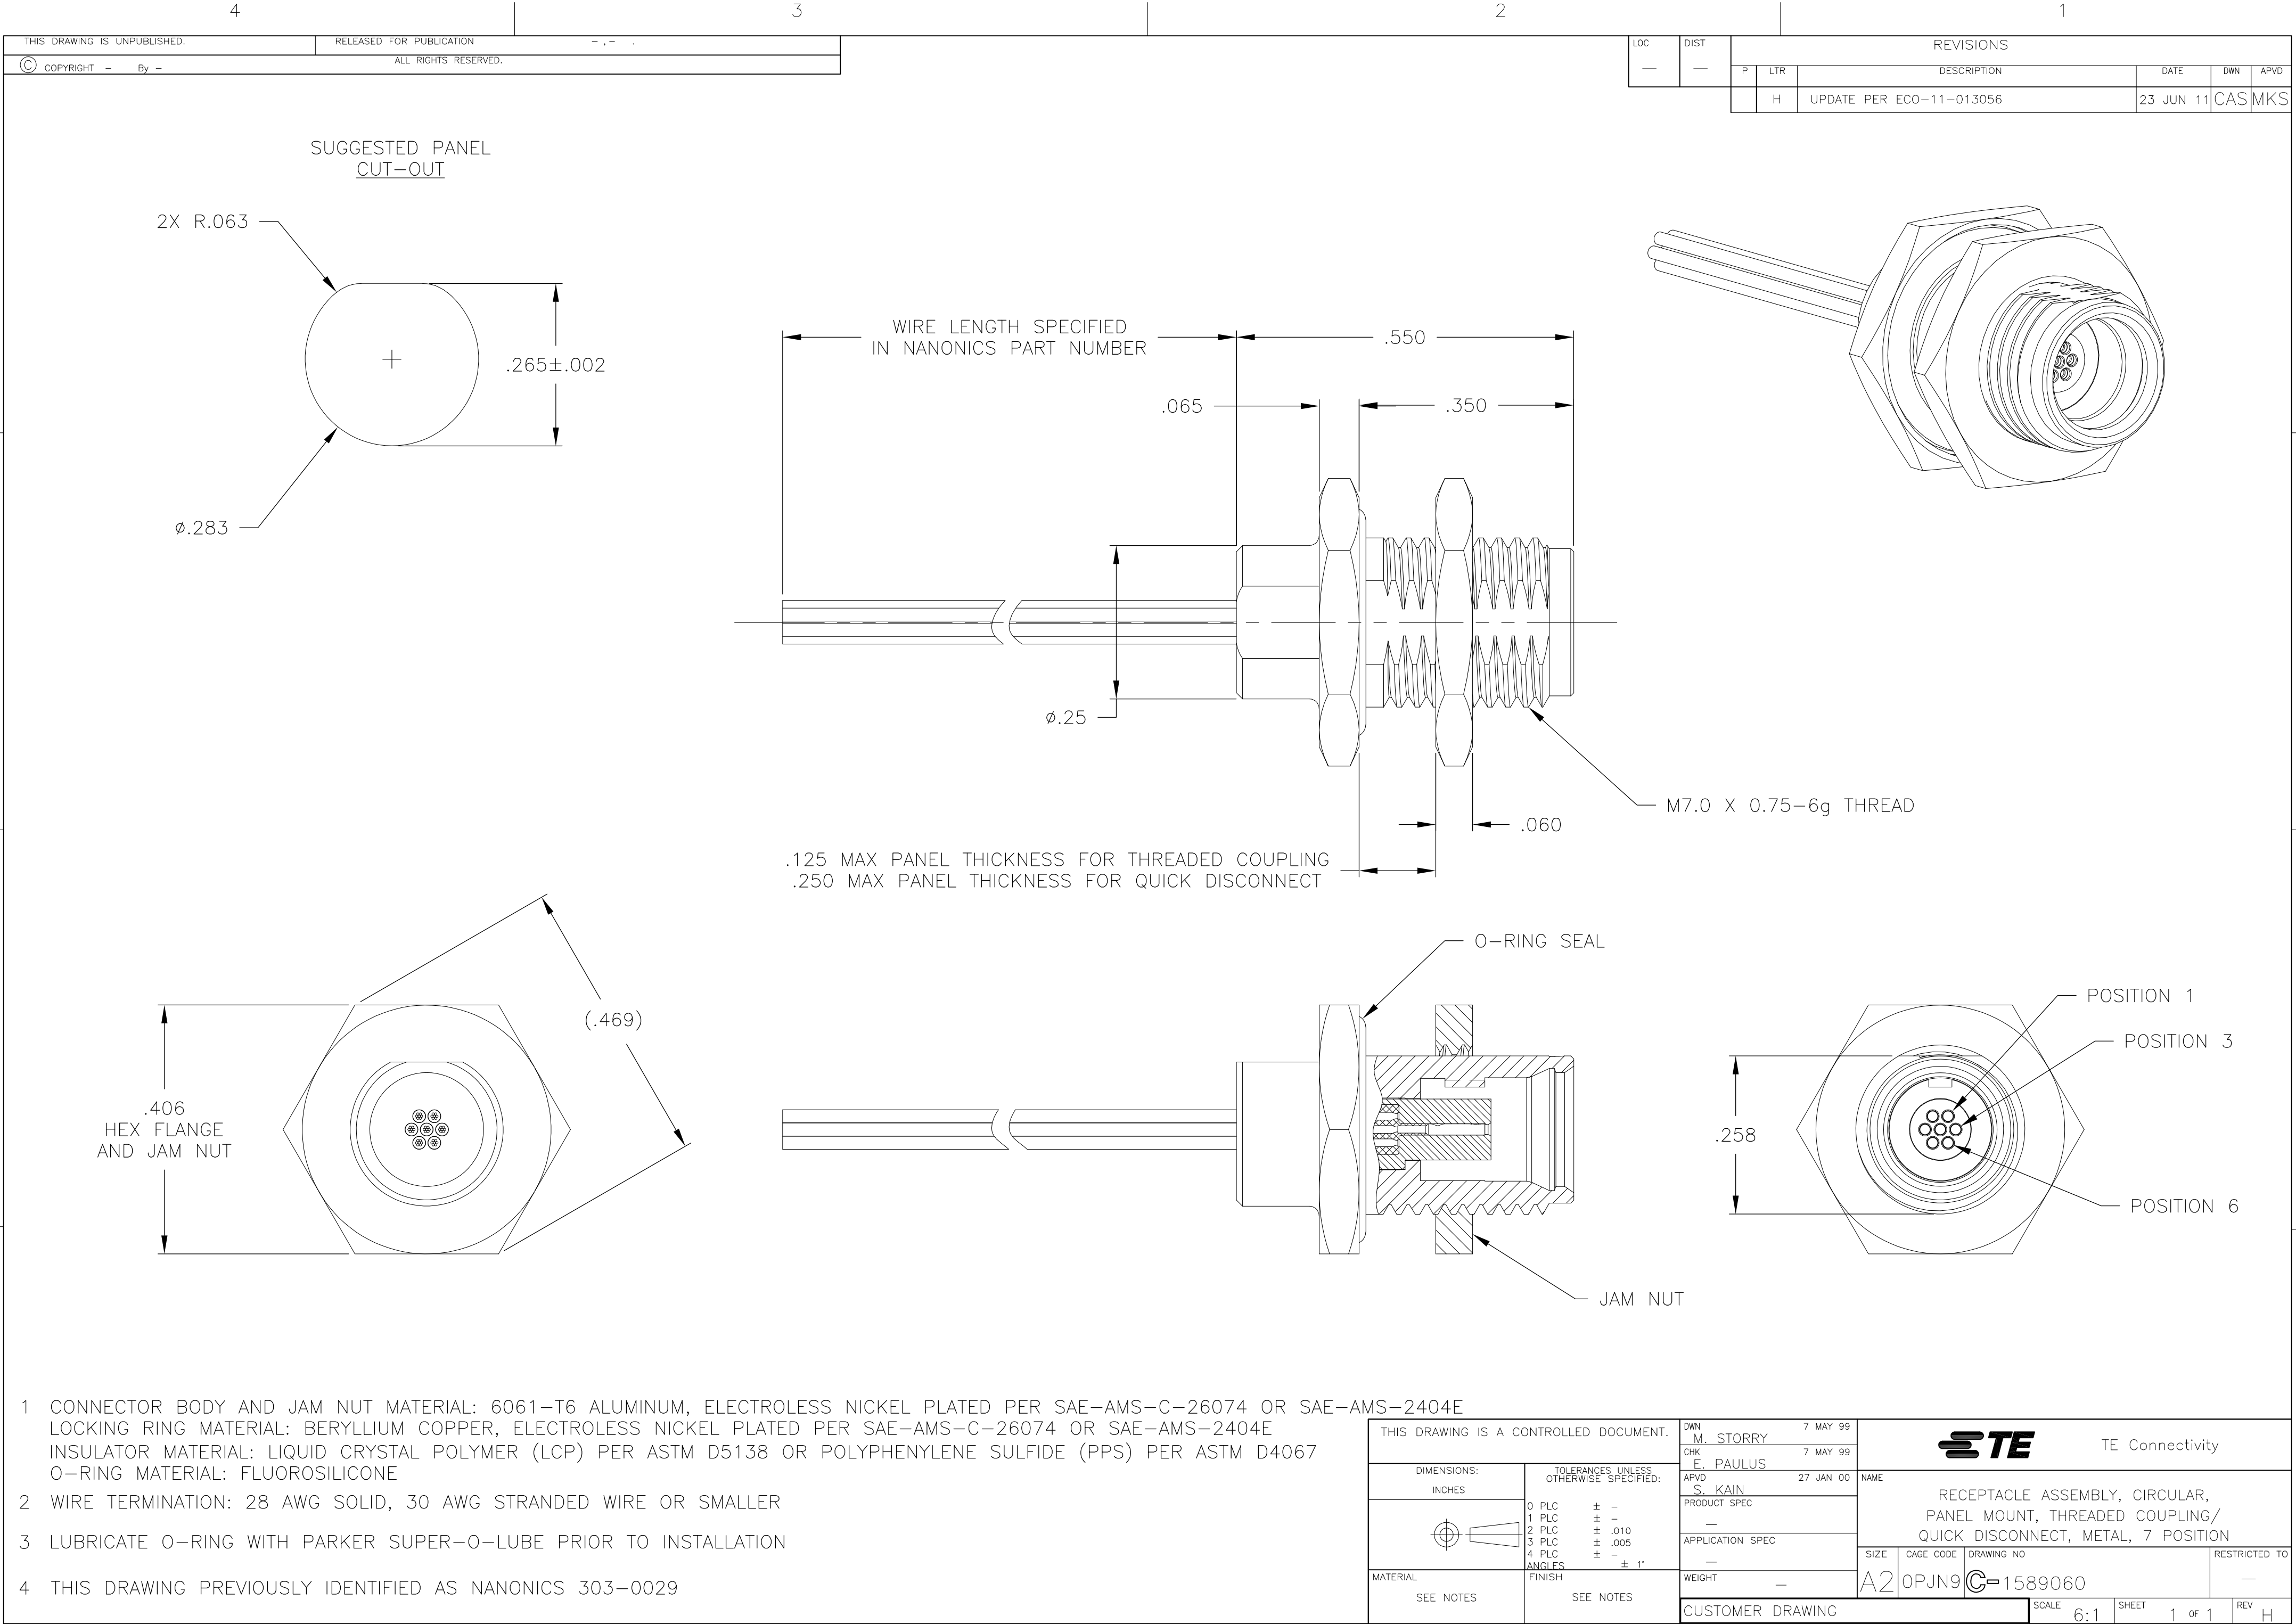

- 1 CONNECTOR BODY AND JAM NUT MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
O-RING MATERIAL: FLUOROSILICONE
- 2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER
- 3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION
- 4 THIS DRAWING PREVIOUSLY IDENTIFIED AS NANONICS 303-0029

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. STORRY	7 MAY 99	TE Connectivity	
DIMENSIONS: INCHES		CHK E. PAULUS	7 MAY 99		
		APVD S. KAIN	27 JAN 00	NAME	
		PRODUCT SPEC		RECEPTACLE ASSEMBLY, CIRCULAR, PANEL MOUNT, THREADED COUPLING/ QUICK DISCONNECT, METAL, 7 POSITION	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		SIZE	RESTRICTED TO
0 PLC ± -		—		A2	—
1 PLC ± -		WEIGHT		CAGE CODE	REV
2 PLC ± .010		—		0PJN9	H
3 PLC ± .005		CUSTOMER DRAWING		DRAWING NO	
4 PLC ± -		SCALE		C=1589060	
ANGLES ± 1°		SHEET		1 OF 1	
FINISH		REV			
SEE NOTES					