

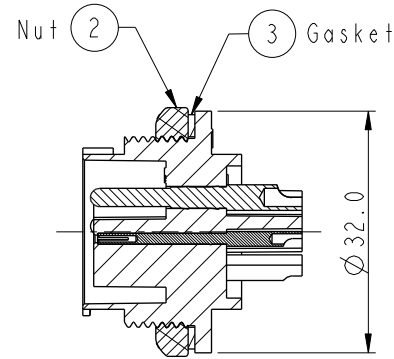






REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN14C0566	2014/12/19	Sam	Update Logo.
C	CI90314	2019/03/12	Ruru	Modify Note




Section A-A



Pin Assignments
Front View



Recommended
Panel Cut-Out

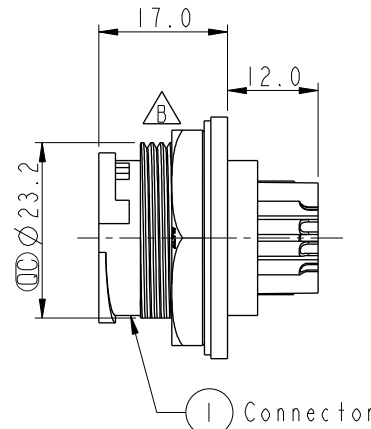

Connector

- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Gray
 - * Use With Waterproof Cap Or Dust Cap
Panel Thickness Max.: 3.0mm
 - * Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max.: 4.0mm
 - * Gasket and Nut are packed separately
in PE bags.

UNIT:mm		TITLE Panel Connector 3MPin(20A)+5FPin(2A)		ITEM NO DCU-08PMES-LC7001		DRAWN BY Ruru		DATE 2019-03-12	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 1:1		DWG NO DCU-08PMES-LC7001		CHECKED BY Rita		DATE 2019-03-12	
REV. C		SIZE A4		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-03-12	
WC-REV. A.6		SHEET 1 OF 1		ALTW		Max		2019-03-12	
		QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.