



# TOP VIEW

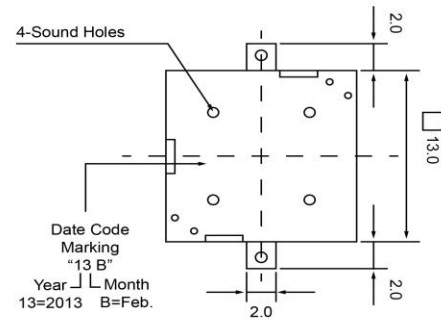

# SIDE VIEW



## Specifications

Description	Value	Unit
Technology	Piezo	
Resonant Frequency	4,100	(Hz)
Rated Voltage	5	(V)
SPL @ 10cm (min.)	75	(dBA)
Capacitance	16,000	(pF)
Mount Type	Surface Mount	
Max Voltage	30	(V)
Max Rated Current	5	(mA)
Housing Material	LCP	
Operating Temperature	-20 ~ +105	°C
Storage Temperature	-30 ~ +105	°C
Weight	0.5	(g)

## Notes

- 1) All dimensions are in mm unless otherwise noted
- 2) All parts meet RoHS



High Temp Piezo Transducer

## Revision History

Version	Description			Date	Approved
1	Released from Engineering			4/3/2015	J.S.

**TP134105-1**