

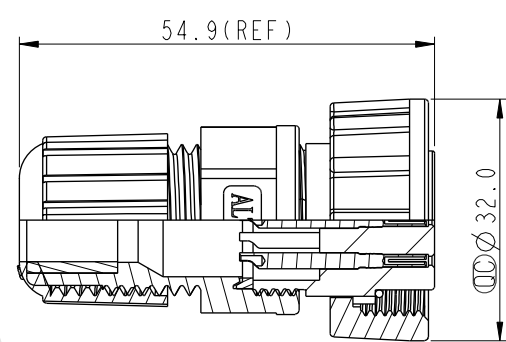




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0606	2010/11/26	Ivan	Change View
C	LEN14A0141	2014/10/13	Sam	Modify Pin Assignments View.

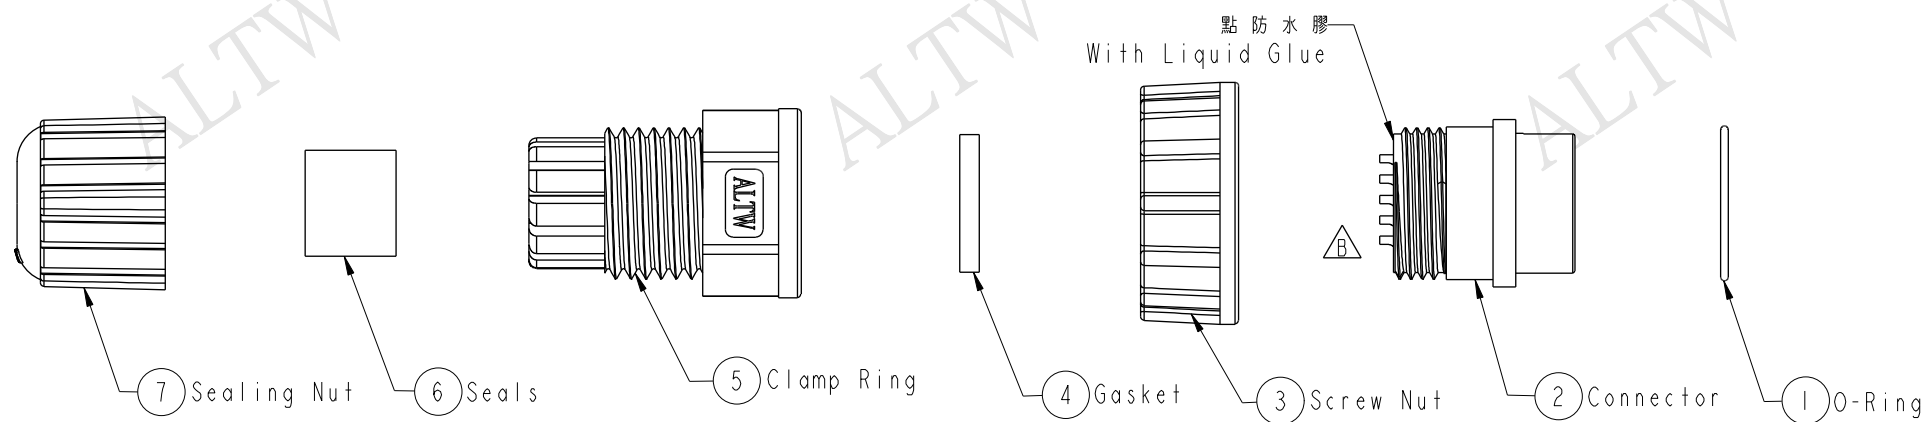

- Note:
- * $\varnothing$ Important Dimension.
 - * Waterproof Rate: IP67
 - * Connector: 18Pin Female Conn, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Screw Nut: Nylon+GF, Black
 - * O-Ring: EPDM, Black
 - * Gasket: Silicone, Black
 - * Sealing Nut: Nylon, Black
 - * Clamping Ring: Nylon, Black
 - * Seals: EPDM, Black
 - * Seal For Cable OD: $\varnothing$ 5.5mm~10.8mm
 - * One Set Unassembled In One PE Bag

UNIT: mm		TITLE Screw Type Connector For Field Installation 180° 18Pin Female Connector Female Pin(5A)		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO DD-18BFFA-SL7001	DRAWN BY Sam	DATE 2014-10-13
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 1:1	SIZE A4	SHEET 1 OF 1		DWG NO DD-18BFFA-SL7001	CHECKED BY Rita	DATE 2014-10-13
REV. C		WC-REV. A.2	$\varnothing$: Inspection item			CUSTOMER ALTW	APPROVED BY Win	DATE 2014-10-13
								8 FMW10702-01-02A1