



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1770144	2017/07/10	Ruru	Modify Note



7 Sealing Nut




6 Clamp Ring




5 Seals B2




4 Seals B1



3 Lock Nut





2 Connector



1 O-Ring

With Liquid Glue
點防水膠

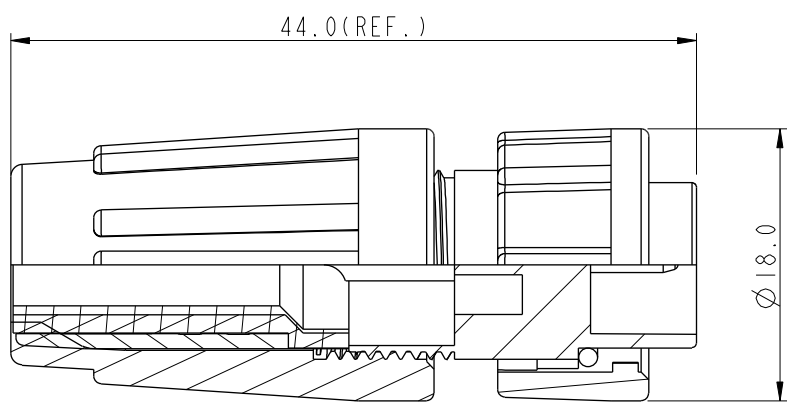

Pin Assignments
Front View 前視圖

Note:

- * $\varnothing$ Important Dimension.
- * Waterproof Rate : IP66
- * O-Ring: EPDM, Black
- * Housing: ,Nylon+GF, Black
- * Pin: Copper Alloy, Gold Plated
- * Lock Nut: Nylon+GF, Black
- * Seals: EPDM, Black
- * Clamping Ring: Nylon+GF, Black
- * Sealing Nut: Nylon+GF, Black
- * PE Bag: 90mm*85mm
- * Liquid Glue: Clear
- * Seals B1 for Cable OD: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$
(防水墊圈B1線徑: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$)
- * Seals B2 for Cable OD: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$
(防水墊圈B2線徑: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$)
- * One Set Unassembled in One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)

UNIT: mm		TITLE		Amphenol LTW		ITEM NO	DRAWN BY	DATE
TOLERANCE		Standard, Assy Lock 2Pin F Conn M Pin		安費諾亮泰企業股份有限公司		BD-02BFMA-LL6001	Ruru	2017-07-10
.X	± 0.25	SCALE	1:1	SIZE	A4	DWG NO	CHECKED BY	DATE
.XX	± 0.1	REV.	B	WC-REV.	A.3	BD-02BFMA-LL6001	Rita	2017-07-10
.XXX	± 0.05	$\varnothing$ Inspection item				CUSTOMER	APPROVED BY	DATE
ANGLES	$\pm 1^\circ$					ALTW	Max	2017-07-10