


4 Conductor Sub-Miniature Jack

161-6900-EX

KOBICONN

4 Conductor Sub-Miniature Jack

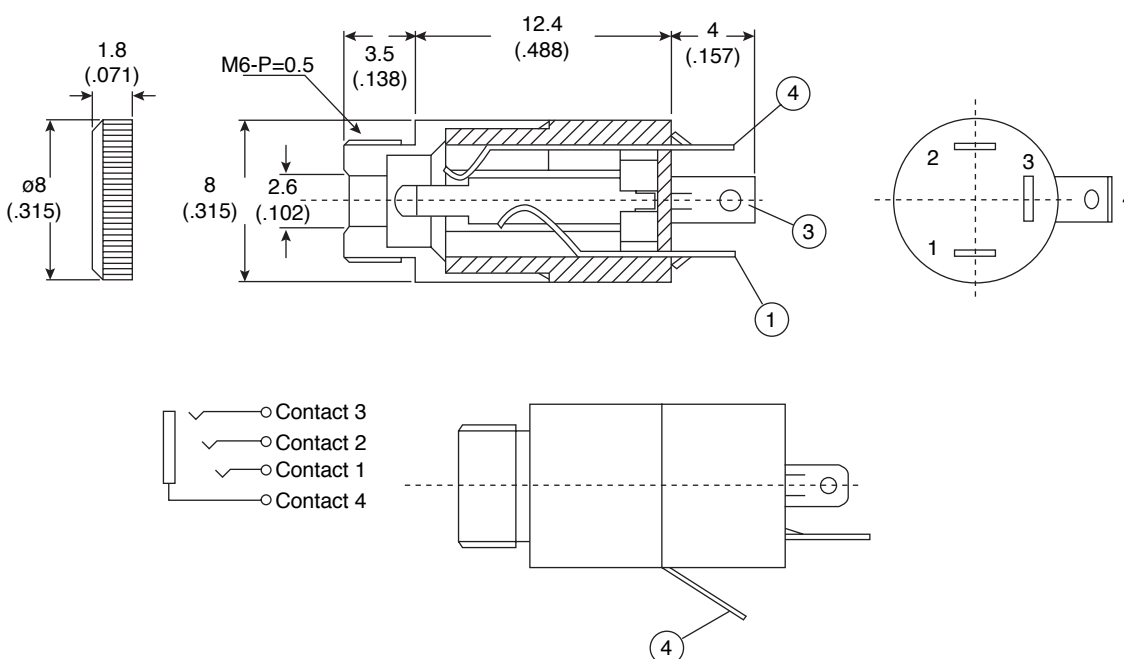

DIMENSIONS mm (In.)

SPECIFICATIONS	
Dielectric strength:	500V AC for one minute
Insulation resistance:	100MΩ min. at 500V DC
Contact resistance:	500mΩ max.
Body:	PBT G 30%
Contacts:	nickel plated brass
RoHS Compliant by Exemption	

Date Last Revised: 12-8-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300955

161-6900-EX