

1. MATERIAL:



HOUSING - THERMOPLASTIC, GLASS PREINFORCED, COLOR, BLACK, UL 94V-0
CONTACTS- COPPER ALLOY.

2. FINISH:

MATING AREA - NOBLE METAL OVERALL NICKEL.


SOLDER TAIL - MATTE TIN OVERALL NICKEL.

3 MARK P/N AND DATA CODE IN APPROX. AREA AS SHOWN.

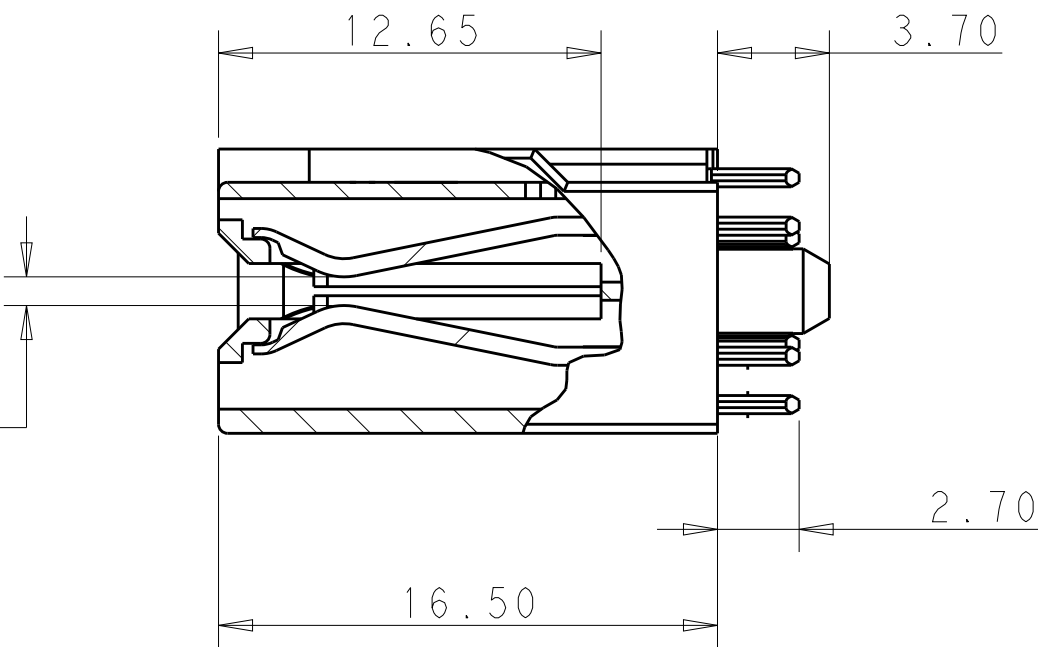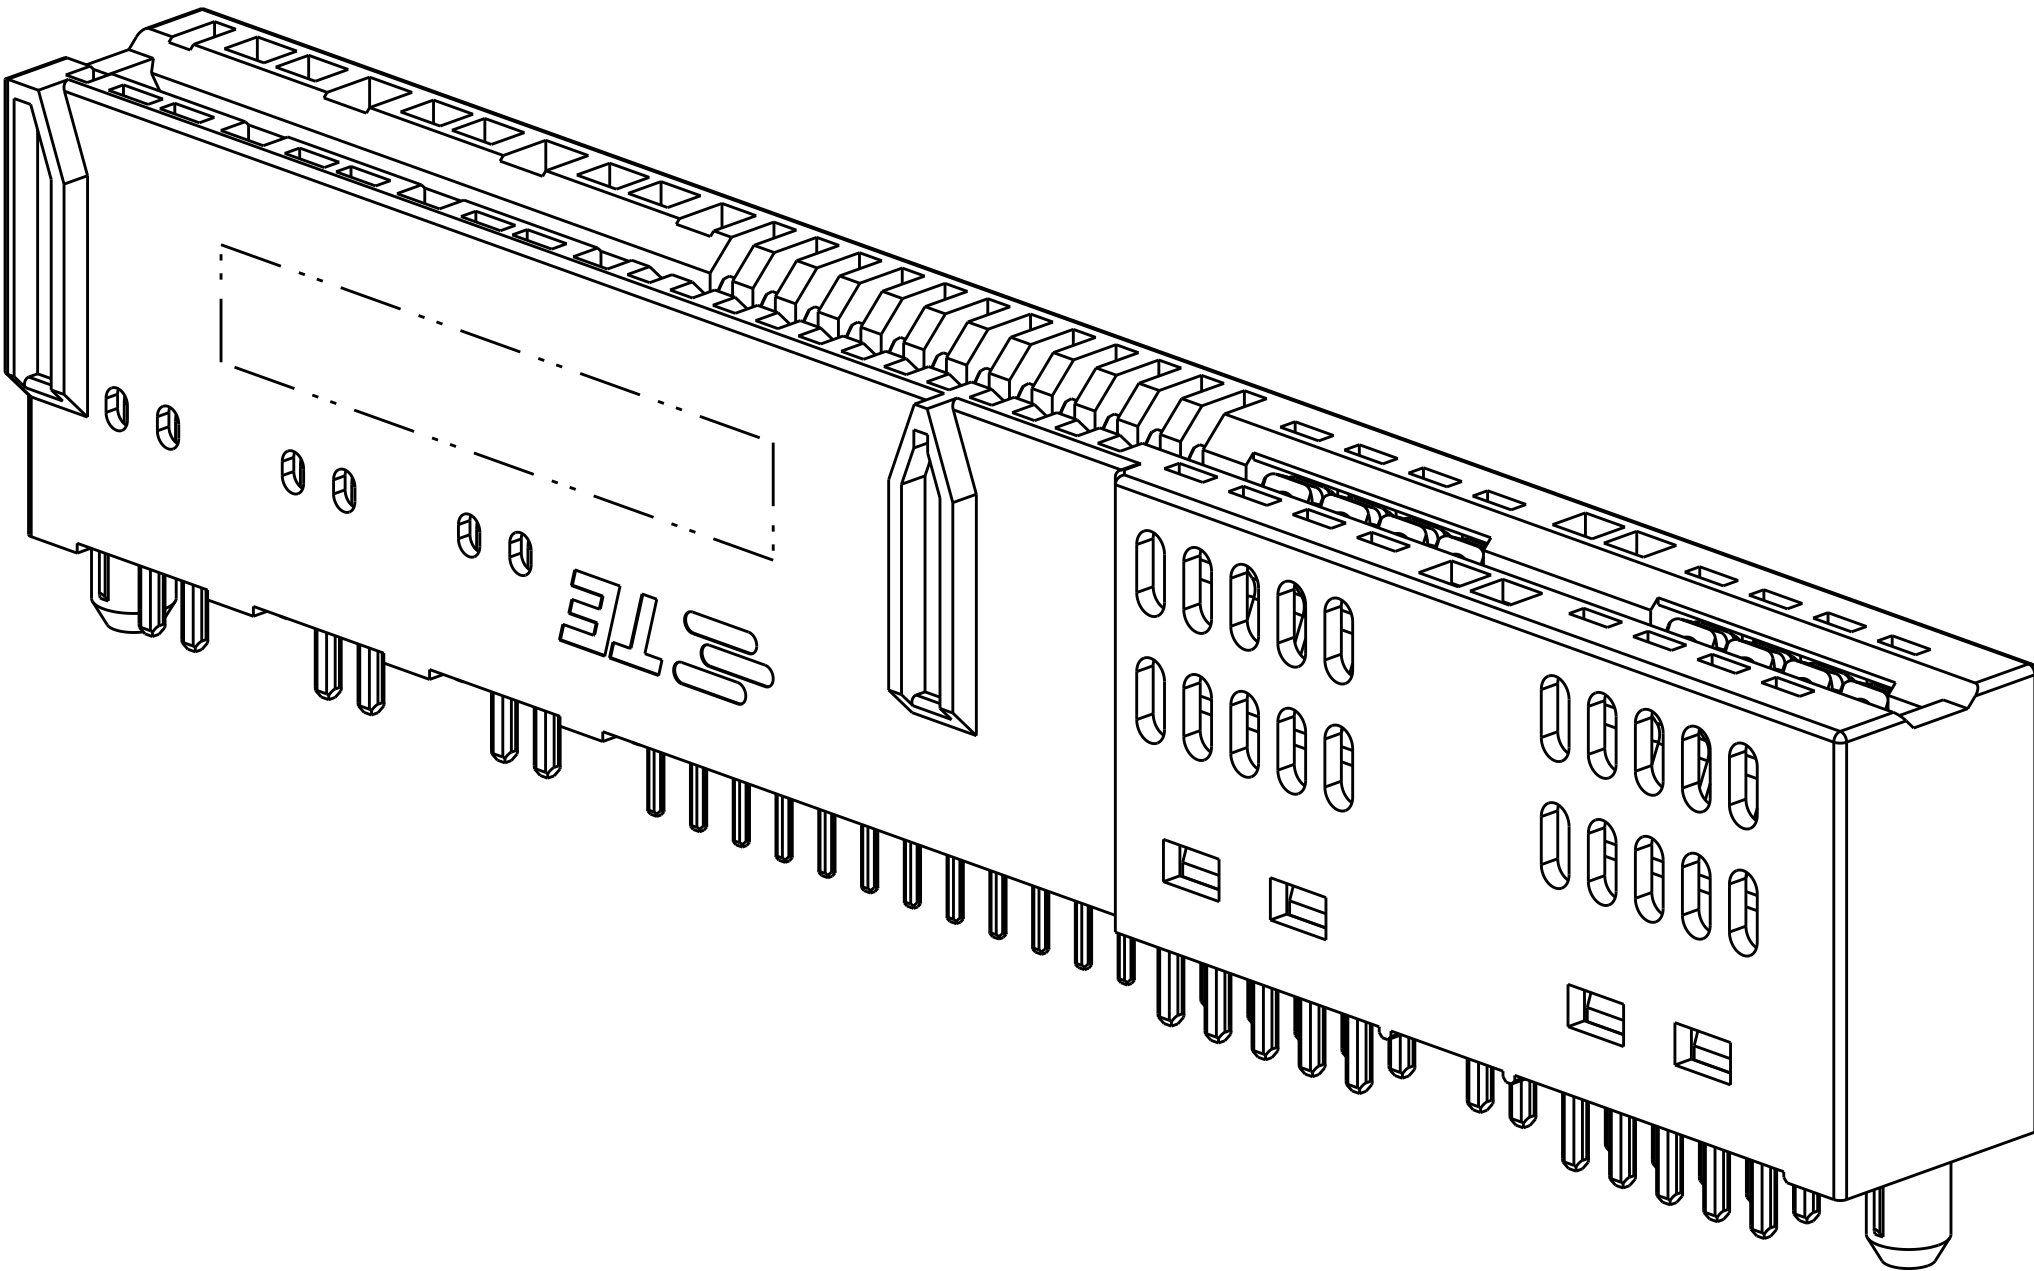


CONNECTOR ACCEPTS
1.6±0.14 mm PCB


SECTION AC-AC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 01SEP2017 SEAN ZHANG CHK		PART NUMBER 8222260-1	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.0 1 PLC ±0.40 2 PLC ±0.20 3 PLC ±0.10 4 PLC ±.0 ANGLES ±.2 FINISH		APVD 01SEP2017 SUNY ZHAO PRODUCT SPEC 108-128060 APPLICATION SPEC - WEIGHT -	
MATERIAL -		CUSTOMER DRAWING		HIGE DENSITY HYBRID POWER CARD EDGE SOLDER TYPE LOW PROFILE SIZE CASE CODE DRAWING NO A 00779 © 8222260 RESTRICTED TO -	
				SCALE 1:1 SHEET 1 OF 2 REV A	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	-	-	SEE SHEET 1	-	-	-

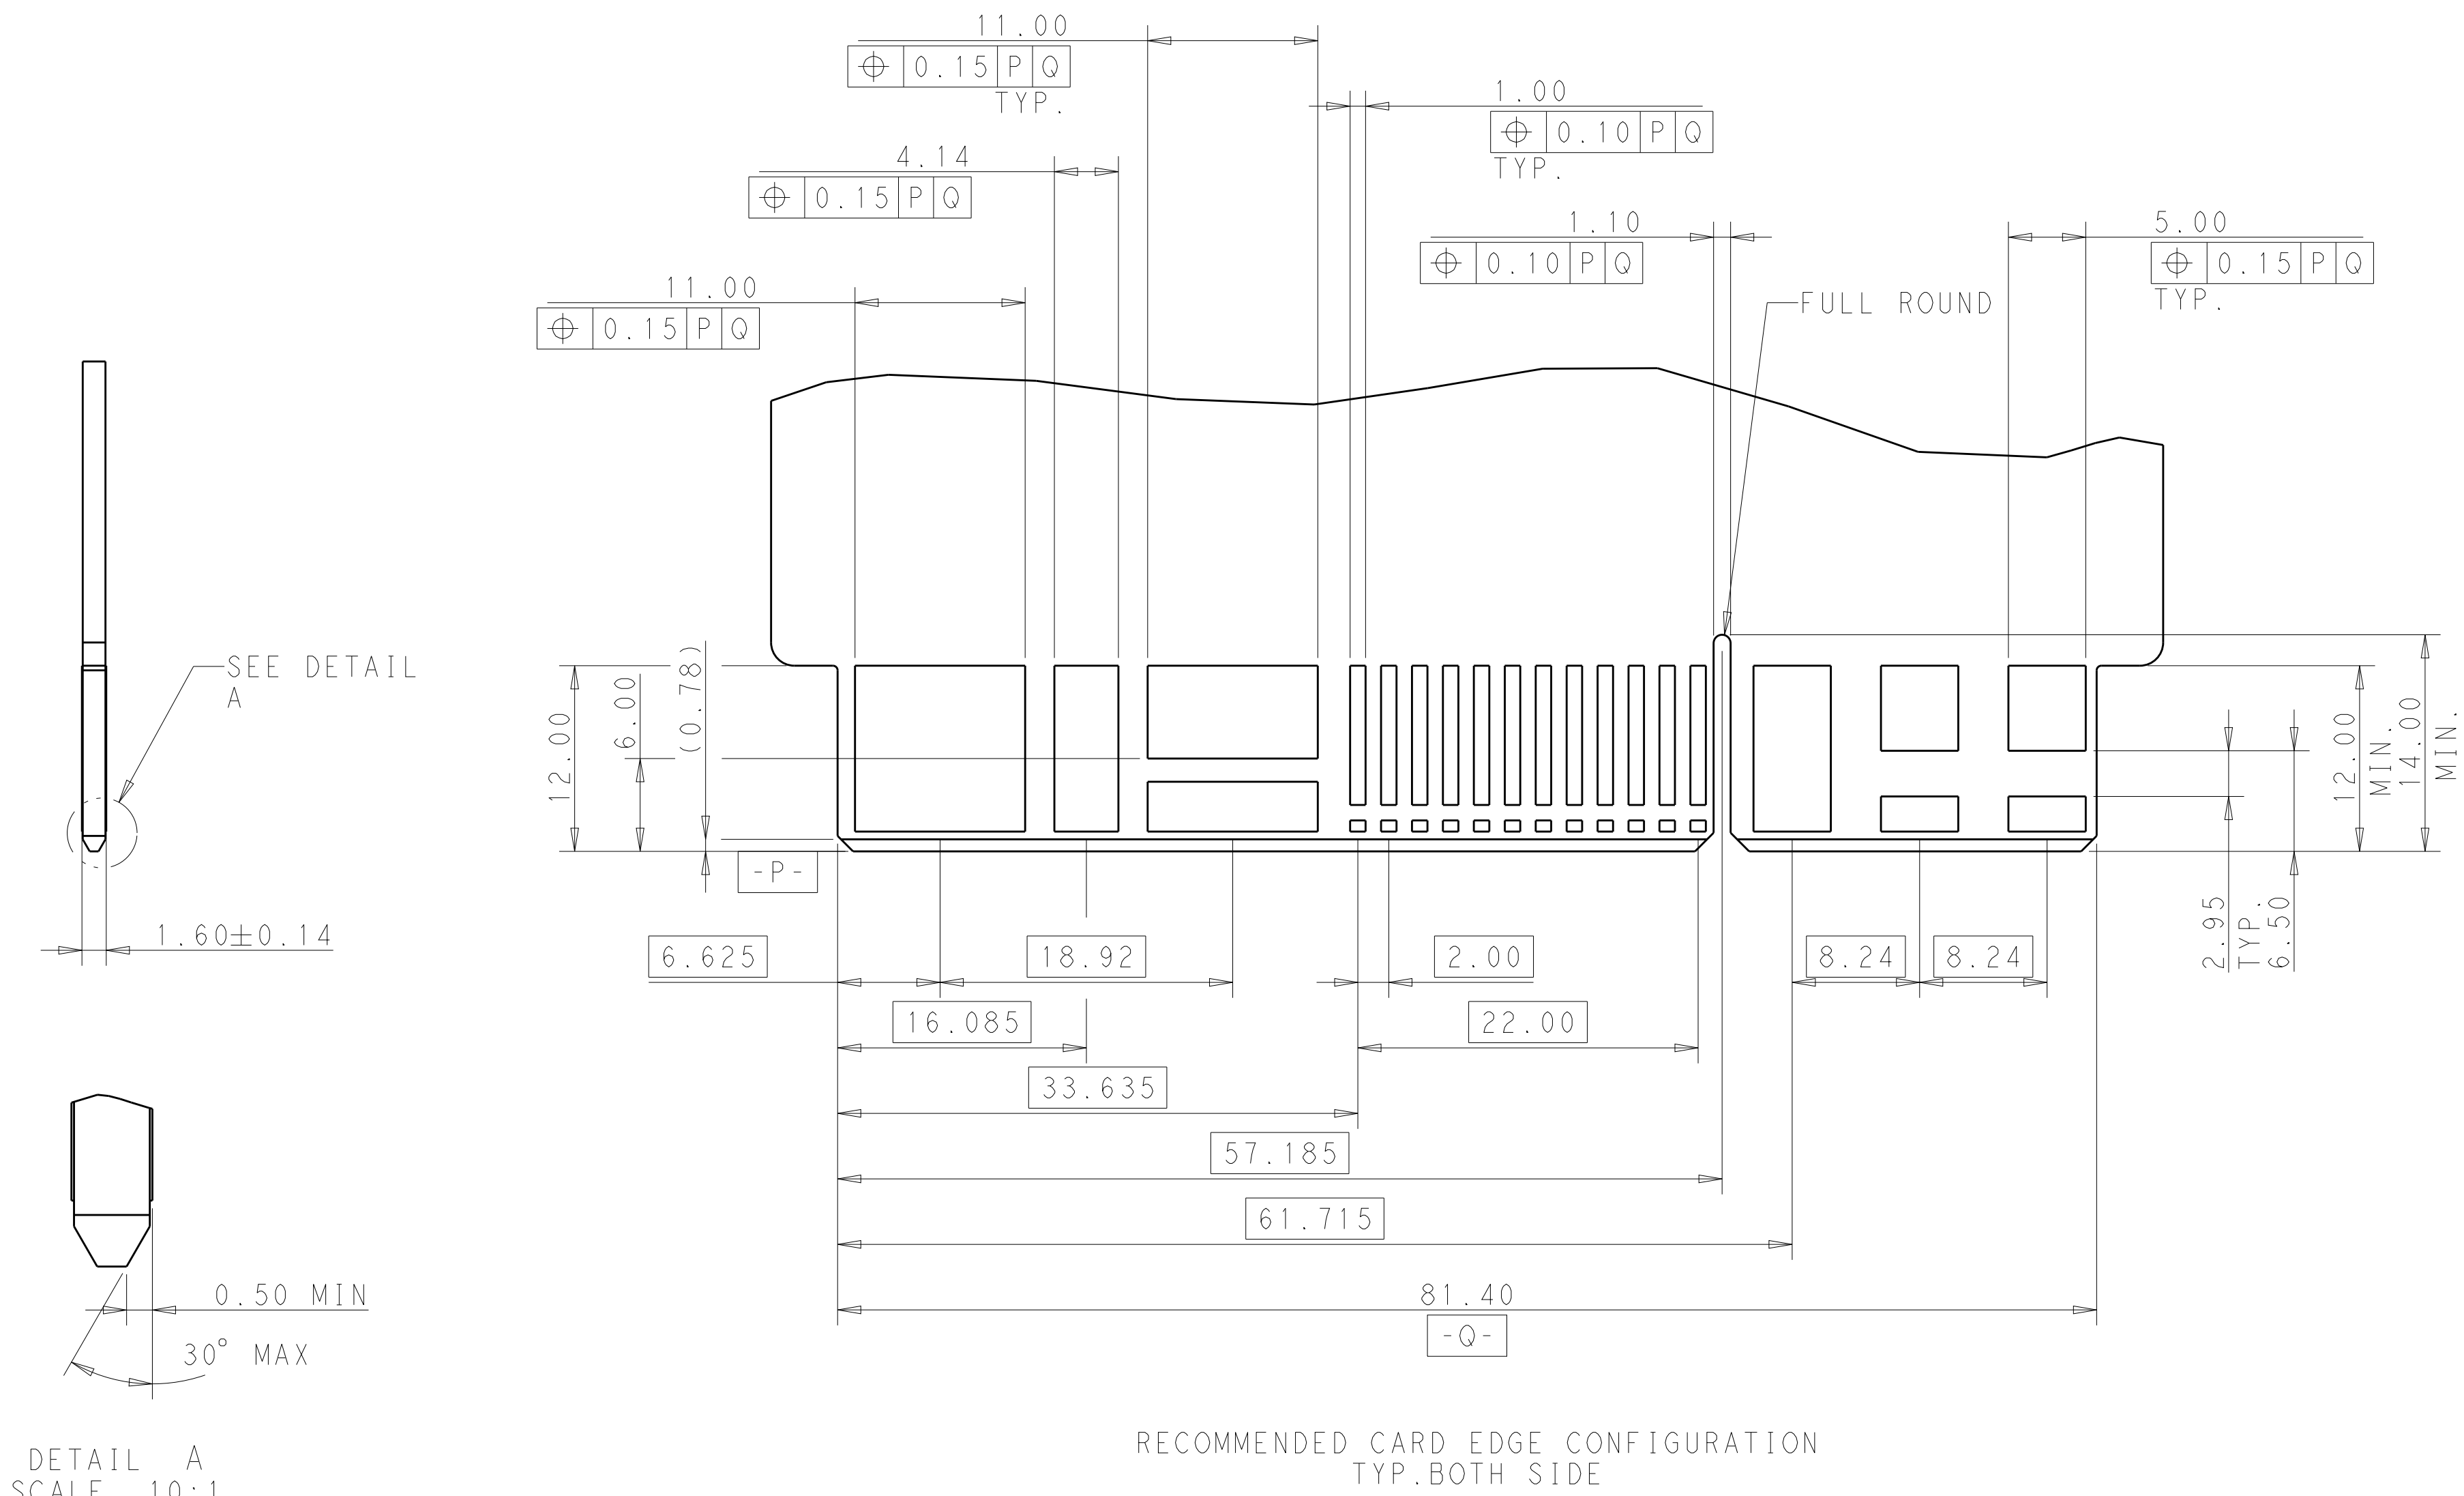

RECOMMENDED CARD EDGE CONFIGURATION
TYP.BOTH SIDE

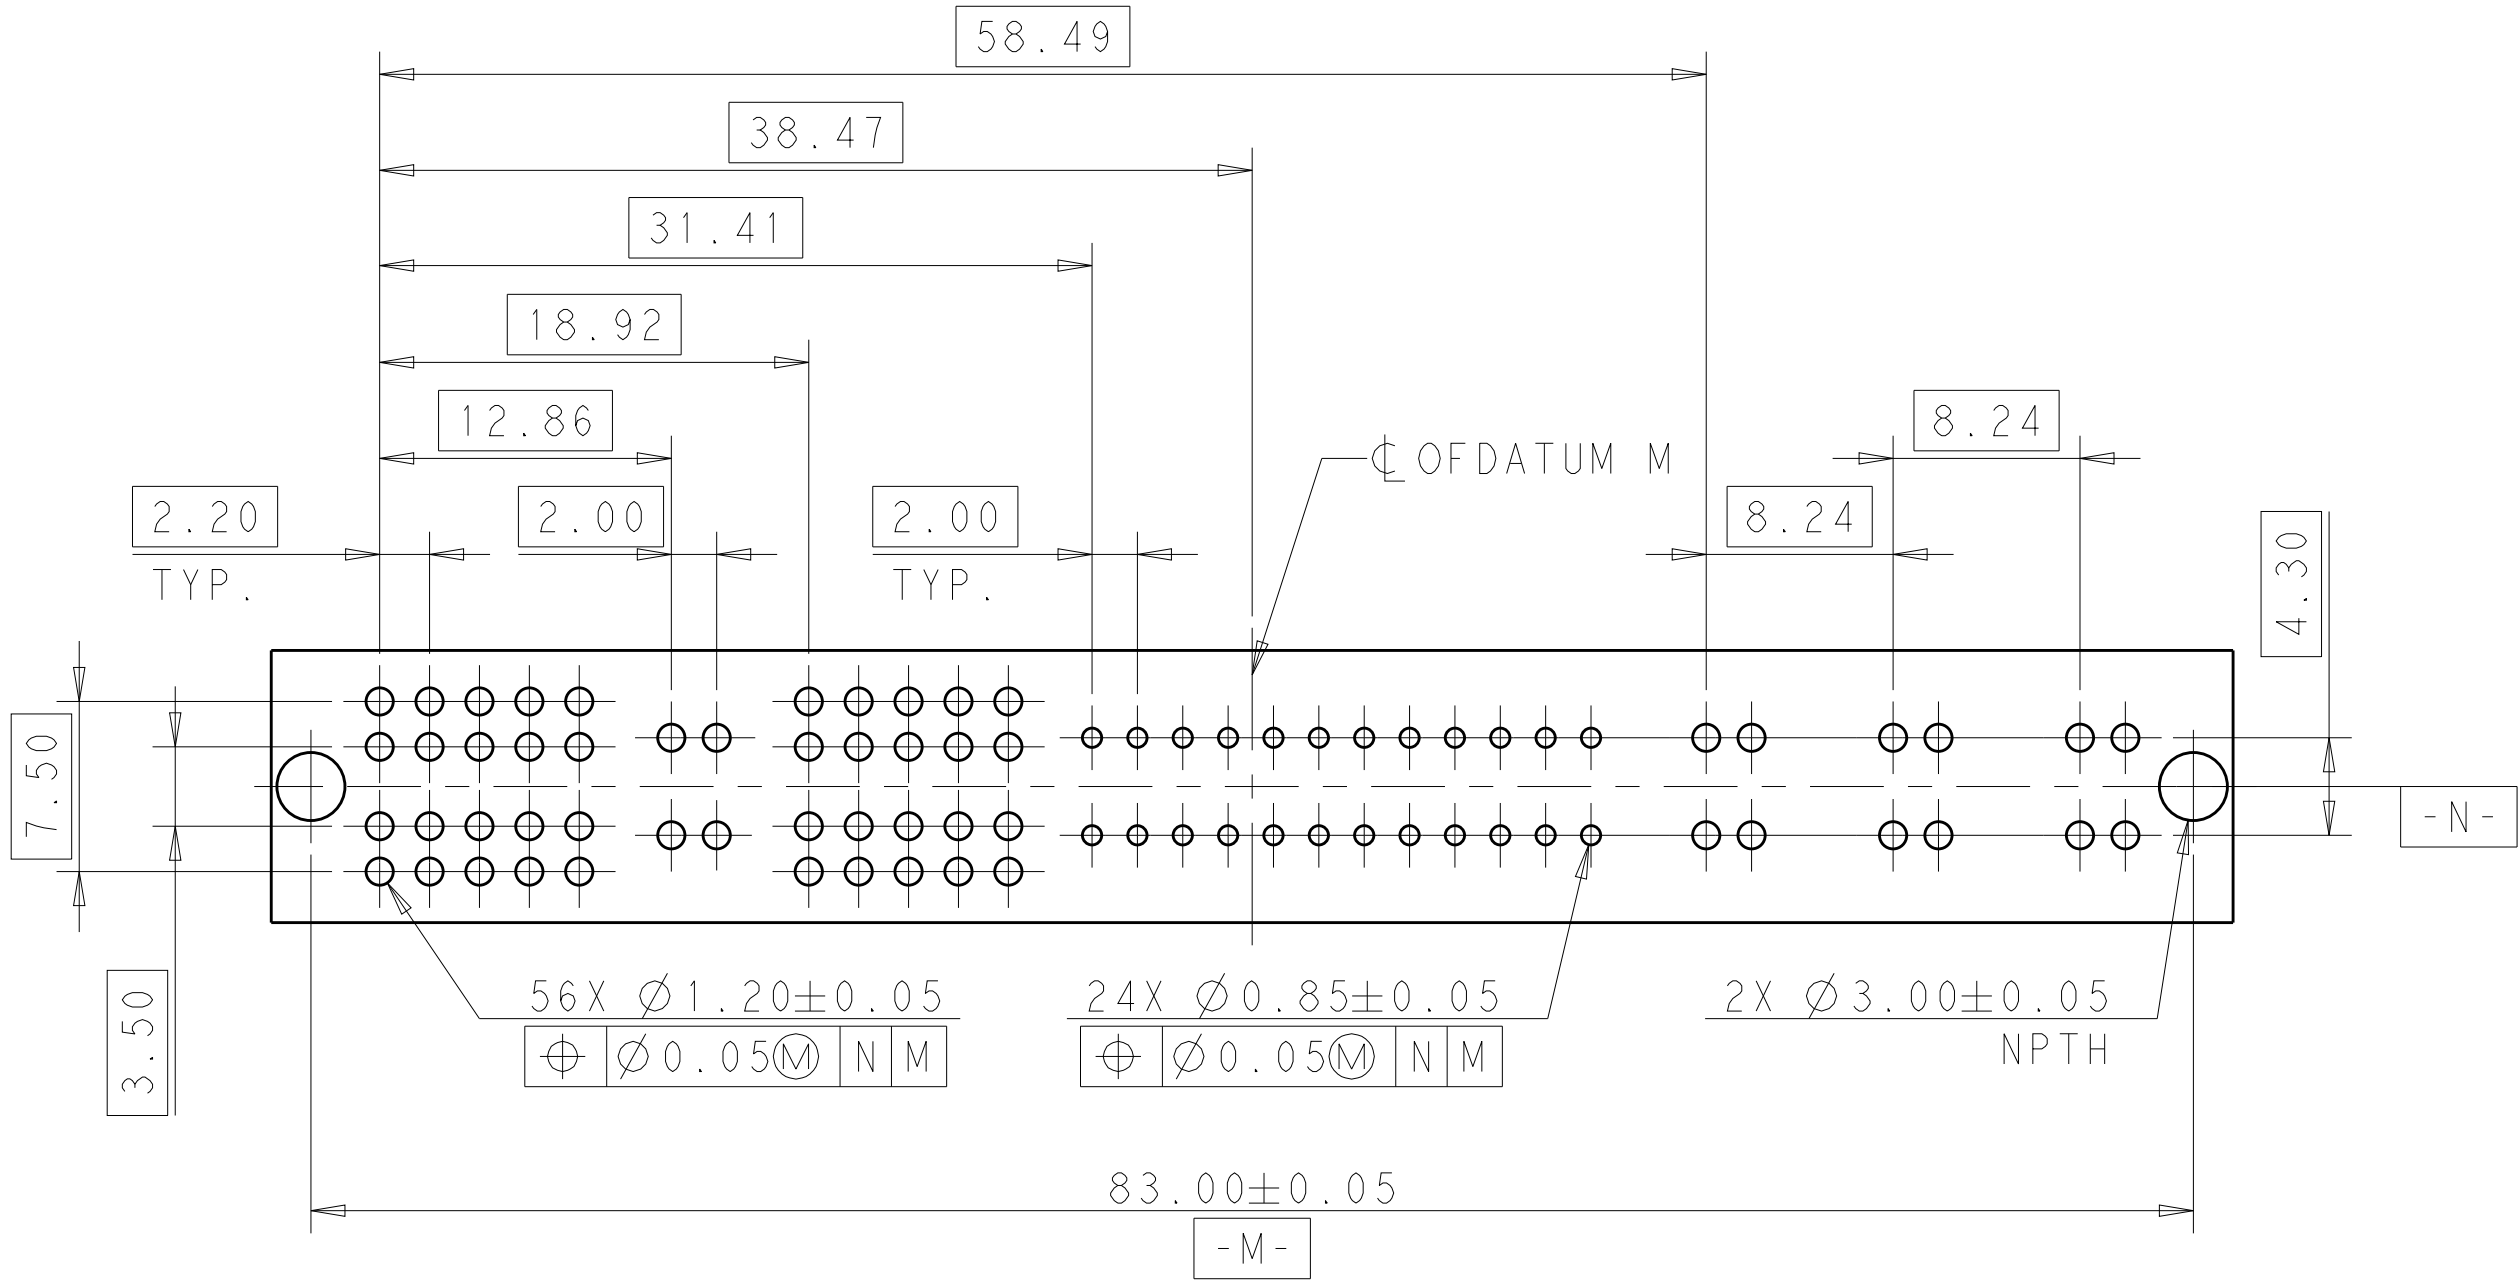

RECOMMENDED MOUNTING BOARD LAYOUT
COMPONENT SIDE

- NOTES FOR MOUNTING BOARD,UNLESS OTHERWISE SPECIFIED:
- 1.PLATED THROUGH HOLE, SIGNAL:
FINISHED HOLE SIZE:0.85mm.
DRILL HOLE SIZE:0.95±0.025mm.
 - 2.PLATED THROUGH HOLE, POWER:
FINISHED HOLE SIZE:1.2mm.
DRILL HOLE SIZE:1.3±0.025mm.
 - 3.COPPER PLATING THICKNESS:0.025~0.05mm.
 - 4.SURFACE FINISH:OSP OR IMMERSION TIN PLATING
IS RECOMMENDED.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: SEAN ZHANG	01SEP2017	TE Connectivity		
		CHK: SUNY ZHAO	01SEP2017			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
mm		0 PLC ±0.40		HIGE DENSITY HYBRID POWER		
		1 PLC ±0.20		CARD EDGE SOLDER TYPE		
		2 PLC ±0.20		LOW PROFILE		
		3 PLC ±0.10		SIZE		
		4 PLC ±0.10		CAGE CODE		
		ANGLES	#2	DRAWING NO		
		FINISH		A100779		
MATERIAL		WEIGHT		C=2322260		
		CUSTOMER DRAWING		RESTRICTED TO		
				SCALE 1:1		
				SHEET 2 OF 2		
				REV A		