


DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE


00

BS, A , 200868, 009

REV.	DATE	DESCRIPTION	BY	C'K'D'
00	16/11/07	FIRST ISSUE	R.Ch	

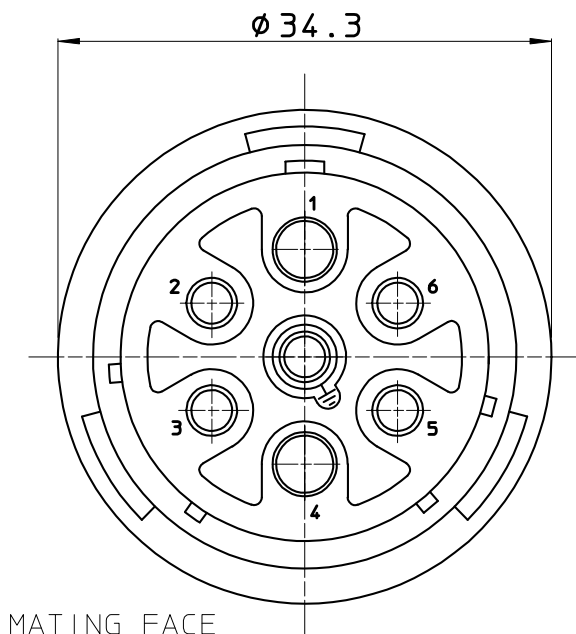

MATING FACE

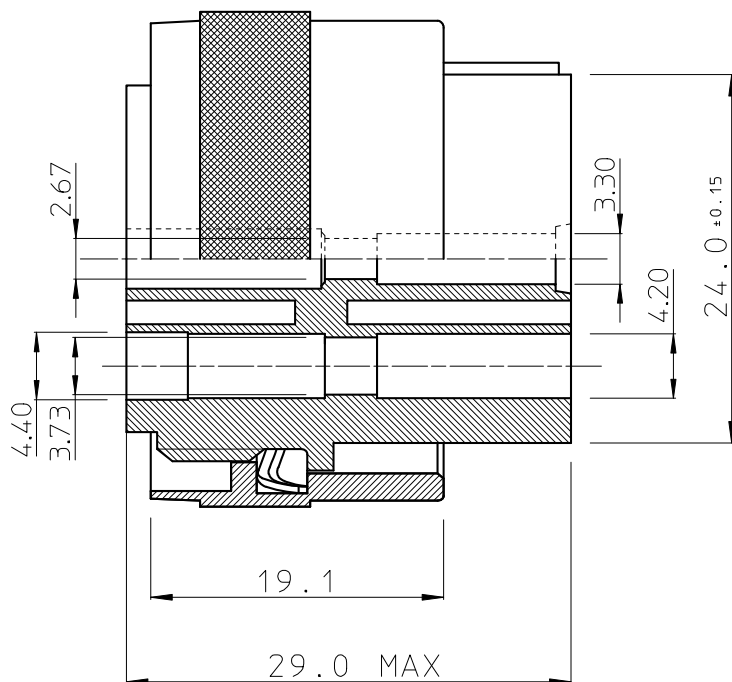

MATERIAL

- BODY : GLASS-FILLED POLYESTER.
COLOUR : BLACK.
- BAYONET COUPLING RING : HIGH STRENGTH CuZn ALLOY,NICKEL PLATED.

PERFORMANCE CHARACTERISTICS

- OPERATING TEMPERATURE : -25 °C TO +125 °C.
- INSULATION RESISTANCE : 5000 M Ohm MIN.
- TEST POTENTIAL : 2000 V EFF.

NOTES

- CONNECTOR ACCEPTS: Ø 2.4 MM MACHINED SOCKET CONTACTS IN POS. 1, 4.
Ø 1.6 MM SOCKET CONTACTS IN POS. 2, 3, 5, 6 AND 7.
- CONNECTOR ACCEPTS # 16 STRIP FORMED, MACHINED AND SUBMINIATURE COAXIAL ' PIN AND SOCKET CONTACTS AND # 12 MACHINED CONTACTS '
- CONTACTS TO BE ORDERED SEPARATELY.

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88
1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN		APPR.		DATE		SIGN.		FEMALE UTG187 PLUG WITH 2 CONTACTS Ø2.4																							
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.		DRAFT		16/11/07		ROUILLARD		CAT. No . UTG6187SN34																							
		CHECKED						 SOURIAU Route Nationale 23 72470 CHAMPAGNE SCALE 2/1																							
		PROD. MGR.																													
ALL DIMENSIONS IN MM		PR.ENG.MGR.						BS , A , 200868,009 NOT EXPORT CONTROLLED																							
PR.MGT.MGR.																															
ALLE AFMETINGEN IN MM								DRAWING NR. CUSTOMER DRAWING REVISION																							
