




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C180527	2018/11/28	Mafei	Adding 4 Pin Drawing.
C	C191385	2019/08/02	Siou	Revise Rated Voltage.
D	E191814	2019/10/24	Ruru	Δ X3

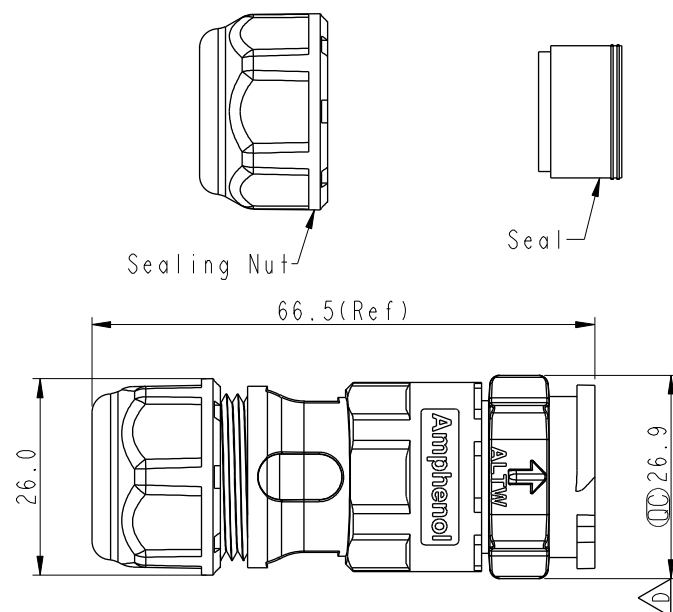


DC-XXBMFB-QL8XPP

02-2 Pin
03-3 Pin
 Δ B 04-4 Pin
05-5 Pin


S: With Red Color Seal 1, Cable OD 8.0~10.0mm.
M: With Yellow Color Seal 2, Cable OD 10.0~12.0mm.
L: With Blue Color Seal 3, Cable OD 12.0~14.0mm.
A: With Seal 1 & Seal 2 & Seal 3.

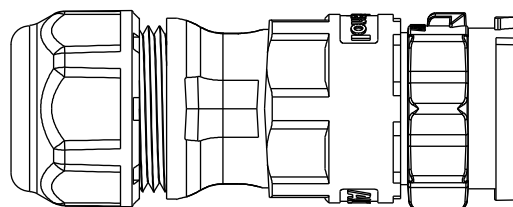


Pin
Assignments
Front View




2 Pin



3 Pin



4 Pin



5 Pin

- Δ Note:
- * Δ Important Dimension
 - * Waterproof Rate: IP68, Mated
IP68 : IM Depth Of Water In 24hours
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seals: Rubber

UNIT:mm		TITLE XLOK, D-20A, 03P, CABLE W/O SR M, F, FI SCREW IN, XLOK Δ	
TOLERANCE ± 0.5 mm		SCALE 8:5	SHEET 1 OF 2
		REV. D	WC-REV. A.3
		Δ QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Siou	DATE 2019-08-02
DWG NO DC-XXBMFB-QL8XPP	CHECKED BY Eagle	DATE 2019-08-02
CUSTOMER ALTW	APPROVED BY Neo	DATE 2019-08-02

