



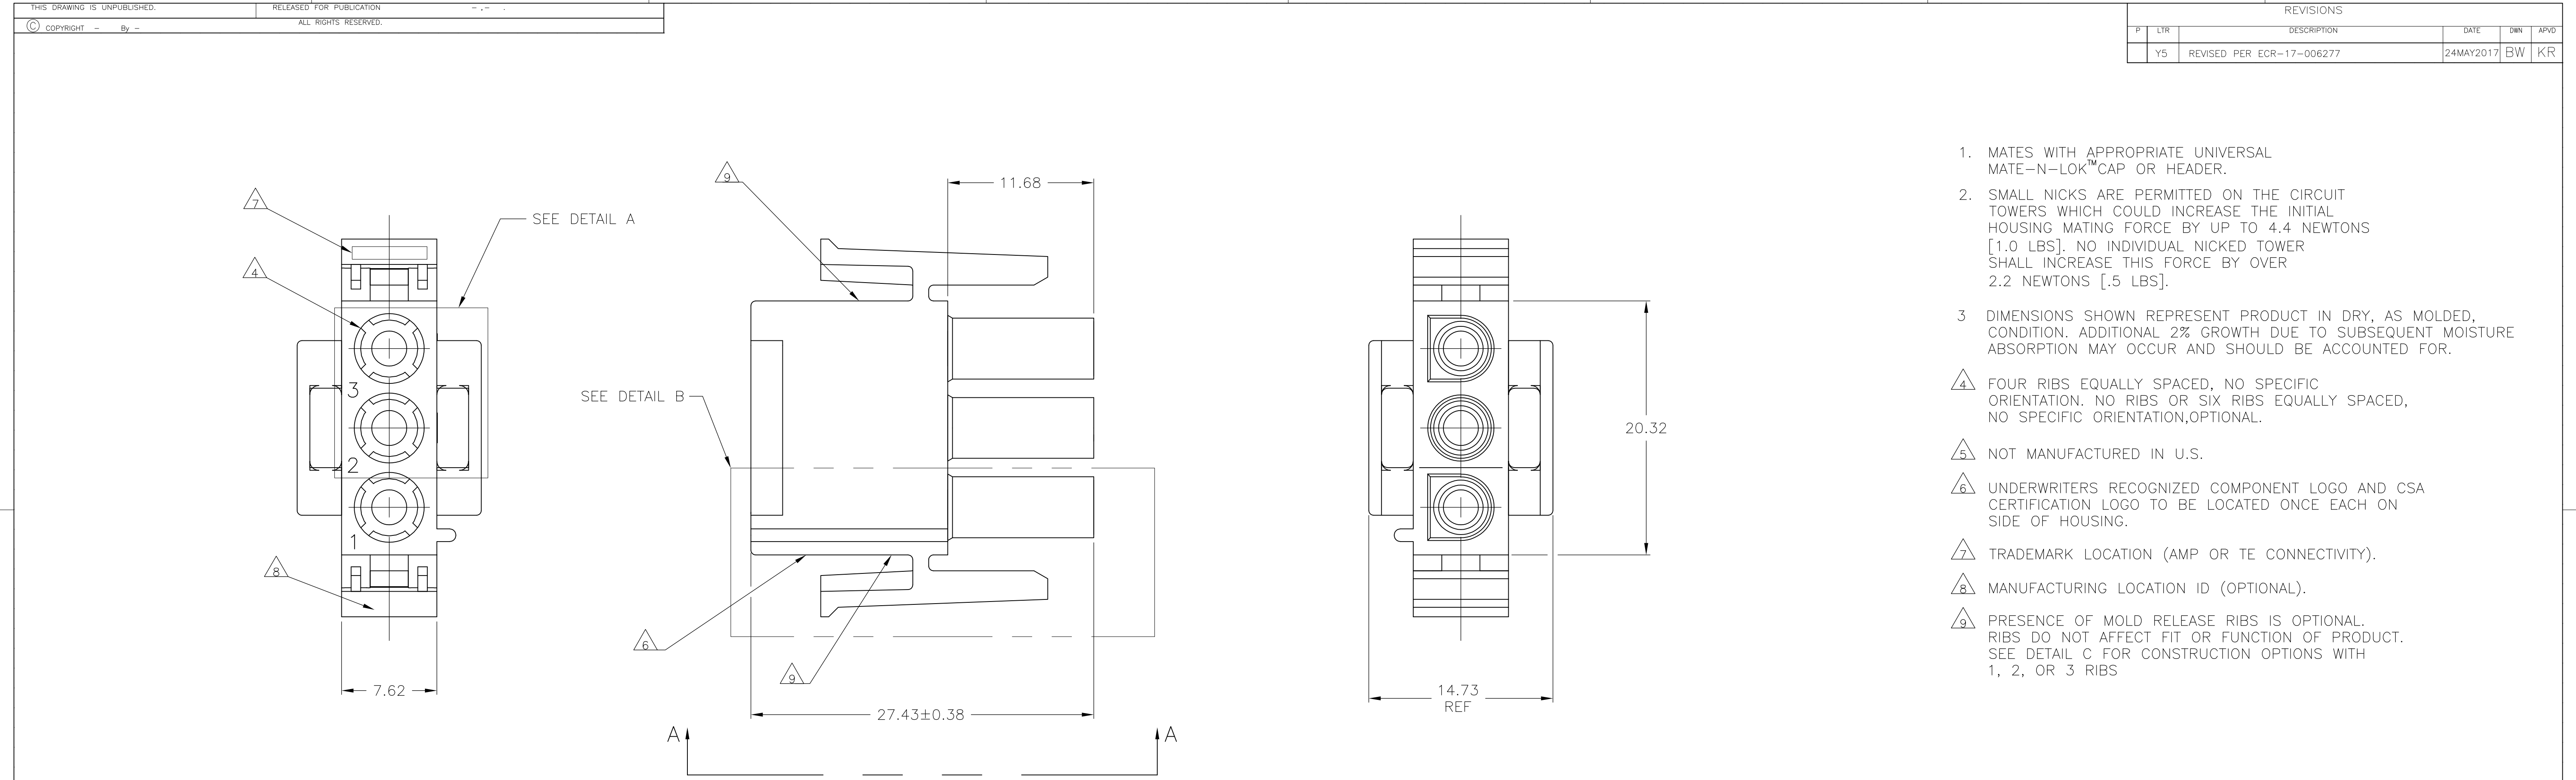

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™CAP OR HEADER.
2. SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
3. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
4. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION,OPTIONAL.
5. NOT MANUFACTURED IN U.S.
6. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
7. TRADEMARK LOCATION (AMP OR TE CONNECTIVITY).
8. MANUFACTURING LOCATION ID (OPTIONAL).
9. PRESENCE OF MOLD RELEASE RIBS IS OPTIONAL. RIBS DO NOT AFFECT FIT OR FUNCTION OF PRODUCT. SEE DETAIL C FOR CONSTRUCTION OPTIONS WITH 1, 2, OR 3 RIBS

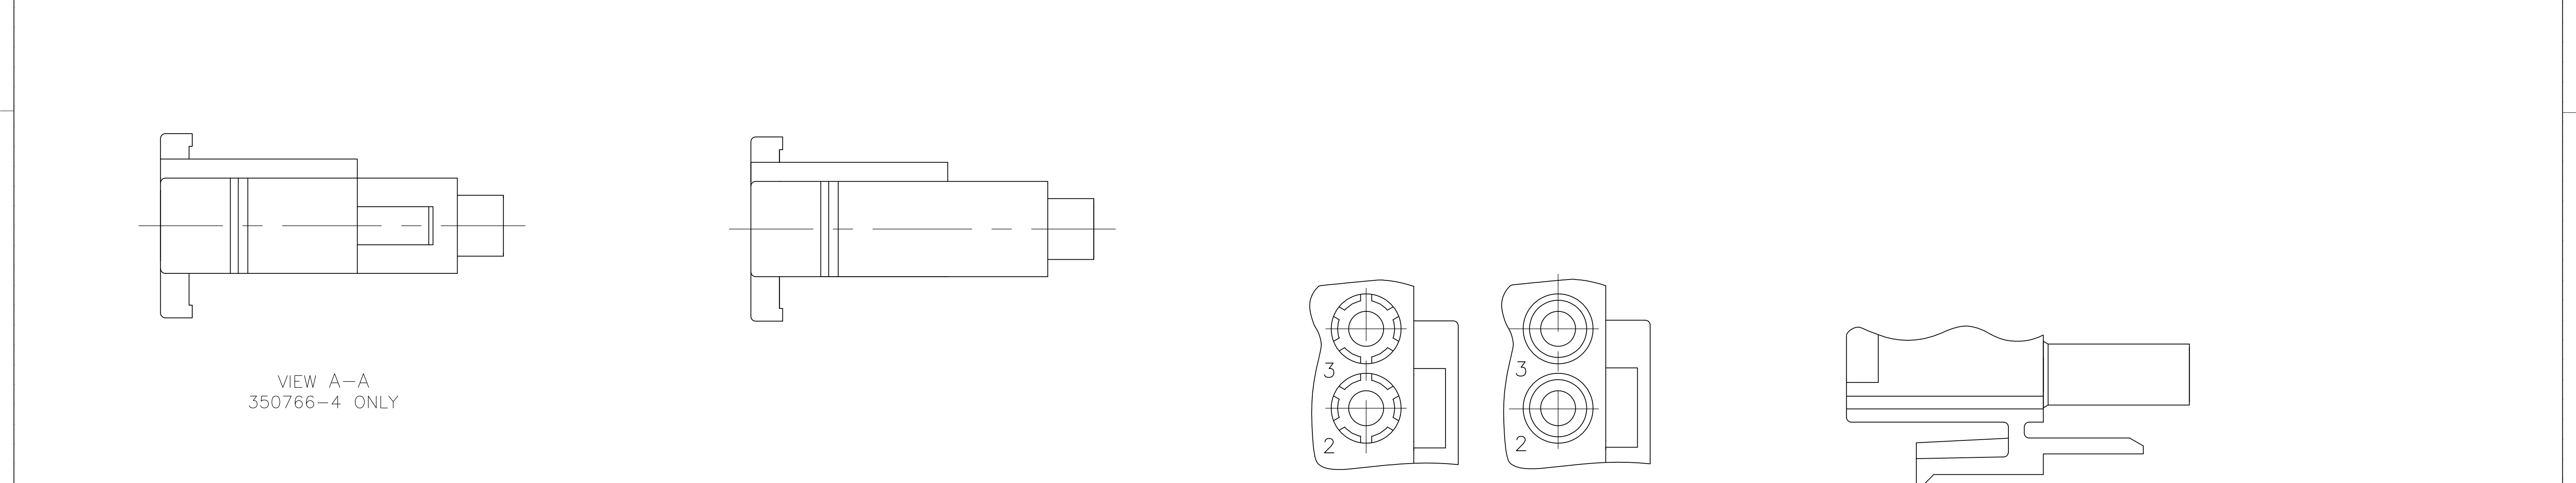

350766-4 3-DIMENSIONAL MODEL NTS

3-DIMENSIONAL MODEL NTS

DETAIL A
OPTIONAL CONSTRUCTION

DETAIL B
350766-4 ONLY

DETAIL C
OPTIONAL CONSTRUCTIONS WITH MOLD PULL RIBS

27.43	1.080
20.32	.800
14.73	.580
11.68	.460
7.62	.300
0.38	.015
0.13	.005
MM	IN

CONVERSION TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± 0°30'

MATERIAL NYLON, UL 94V-0

DWN K. WHITAKER 07OCT05 CHK S. RIDGILL 07OCT05 APVD S. RIDGILL 07OCT05 NAME PRODUCT SPEC APPLICATION SPEC SIZE CAGE CODE DRAWING NO. RESTRICTED TO WEIGHT 0.000000 A1 00779 350766 CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV Y5

TE Connectivity

PLUG, 3 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)

BLACK	1-350766-9
GRAY	1-350766-8
BLUE	1-350766-6
GREEN	1-350766-5
YELLOW	1-350766-4
ORANGE	1-350766-3
RED	1-350766-2
BROWN	1-350766-1
5	350766-4
5	350766-2
NATURAL	350766-1
COLOR	PART NUMBER