


REV.	DESCRIPTION	DATE
A	NEW DRAWING	7/30/2007

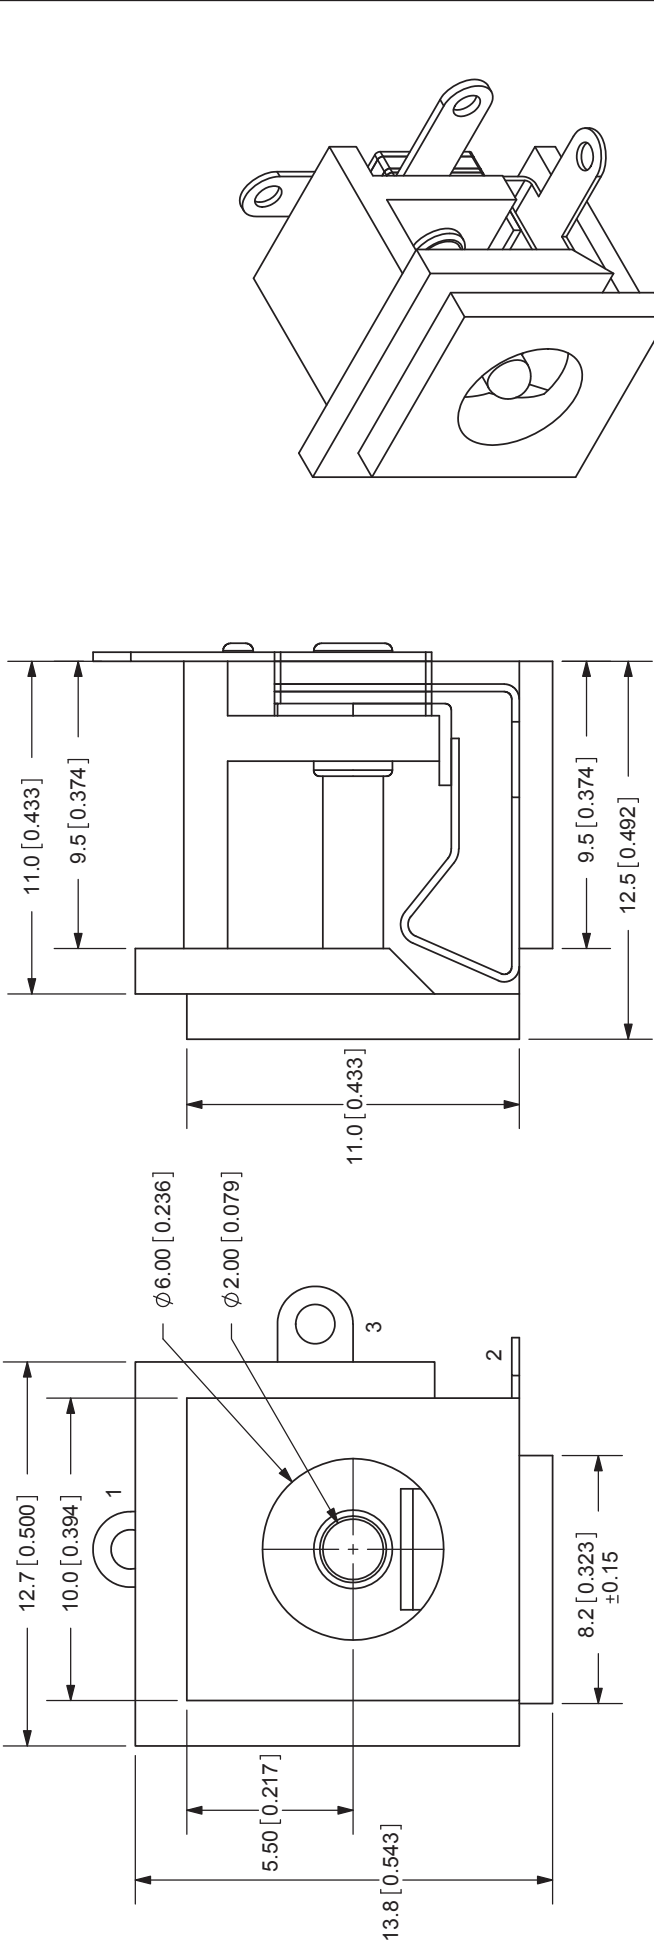

SCALE ~ 3:1

TOLERANCE:
X.X $\pm$ 0.2mm
X.XX $\pm$ 0.1mm
X.XXX $\pm$ 0.05mm

RoHS

CUI INC

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

PC FILE NAME: PJ-026A

COPYRIGHT 2007 BY CUI INC.

MODEL NO. PJ-026A

SCHEMATIC

CENTER PIN DIAMETER 2.00mm Dia.

SPECIFICATIONS:

RATING: 16V DC @ 2.5A

CONTACT RESISTANCE: 50m OHMS MAX

INSULATION RESISTANCE: 100M OHMS MIN: 500V DC

VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE

LIFE: 5,000 CYCLES

OPERATING TEMP: -25° ~ +85°C

CENTER PIN	MATERIAL	PLATING
TERMINAL 1	Copper	Nickel
TERMINAL 2	Brass	Tin
TERMINAL 3	Copper Alloy	Tin
INSULATOR	Brass	Tin
BODY	PBT	

TITLE: DC POWER JACK

REV: A

PART NO. PJ-026A

UNITS: MM [INCHES]

DRAWN BY: ZRJ

APPROVED BY:

SCALE: 4:1