

CMAD4448

**SURFACE MOUNT
ULTRA HIGH SPEED SILICON
SWITCHING DIODE**



www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMAD4448 is an ultra high speed switching diode ideal for applications where very small size and operational efficiency are prime requirements.

MARKING CODE: M

FEMTOmini™



SOD-923 CASE

APPLICATIONS:

- DC / DC Converters
- Voltage Clamping
- Protection Circuits
- Battery powered applications including Cell Phones, Digital Cameras, Pagers, PDAs, Laptop Computers, etc.

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Peak Repetitive Reverse Voltage	V_{RRM}	120	V
Continuous Forward Current	I_F	250	mA
Peak Repetitive Forward Current	I_{FRM}	500	mA
Peak Forward Surge Current, $t_p=1.0\mu\text{s}$	I_{FSM}	4.0	A
Peak Forward Surge Current, $t_p=1.0\text{s}$	I_{FSM}	1.0	A
Power Dissipation	P_D	100	mW
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150	°C
Thermal Resistance	Θ_{JA}	1250	°C/W

FEATURES:

- Current ($I_O=250\text{mA}$)
- Forward Voltage Drop ($V_F=0.91\text{V TYP @ }100\text{mA}$)
- Extremely Fast Switching Speed (4ns Max)
- Miniture, $0.8 \times 0.6 \times 0.4\text{mm}$, ultra low height profile FEMTOmini™ Surface Mount Package.

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_R	$V_R=50\text{V}$			300	nA
I_R	$V_R=50\text{V}, T_A=125^\circ\text{C}$			100	µA
I_R	$V_R=100\text{V}$			500	nA
BV_R	$I_R=100\mu\text{A}$	120	150		V
V_F	$I_F=1.0\text{mA}$	0.55	0.59	0.65	V
V_F	$I_F=10\text{mA}$	0.67	0.72	0.77	V
V_F	$I_F=100\text{mA}$	0.85	0.91	1.0	V
C_T	$V_R=0, f=1.0\text{MHz}$			2.0	pF
t_{rr}	$I_R=I_F=10\text{mA}, R_L=100\Omega$, Rec. to 1.0mA		2.0	4.0	ns

CMAD4448

SURFACE MOUNT
ULTRA HIGH SPEED SILICON
SWITCHING DIODE



SOD-923 CASE - MECHANICAL OUTLINE

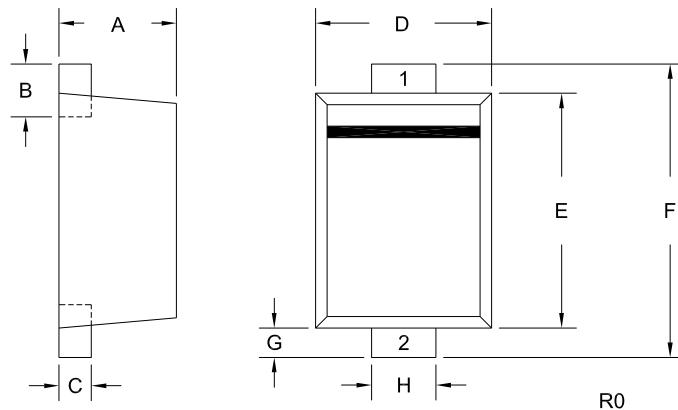

LEAD CODE:
1) CATHODE
2) ANODE

MARKING CODE: M

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.015	0.016	0.39	0.41
B	0.004	0.010	0.10	0.26
C	0.003	0.006	0.08	0.14
D	0.022	0.026	0.55	0.65
E	0.030	0.033	0.75	0.85
F	0.035	0.043	0.90	1.10
G	0.002	0.006	0.05	0.15
H	0.007	0.011	0.17	0.27

SOD-923 (REV: R0)

R1 (8-January 2010)