



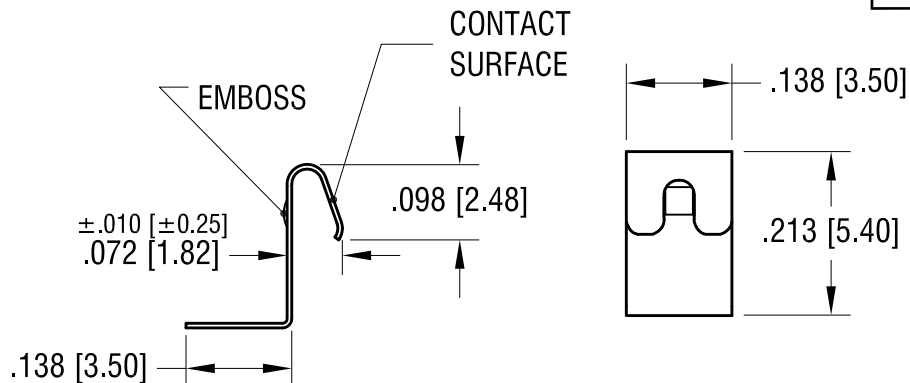

P/N 122

TOLERANCE $\pm .005$ [± 0.13]

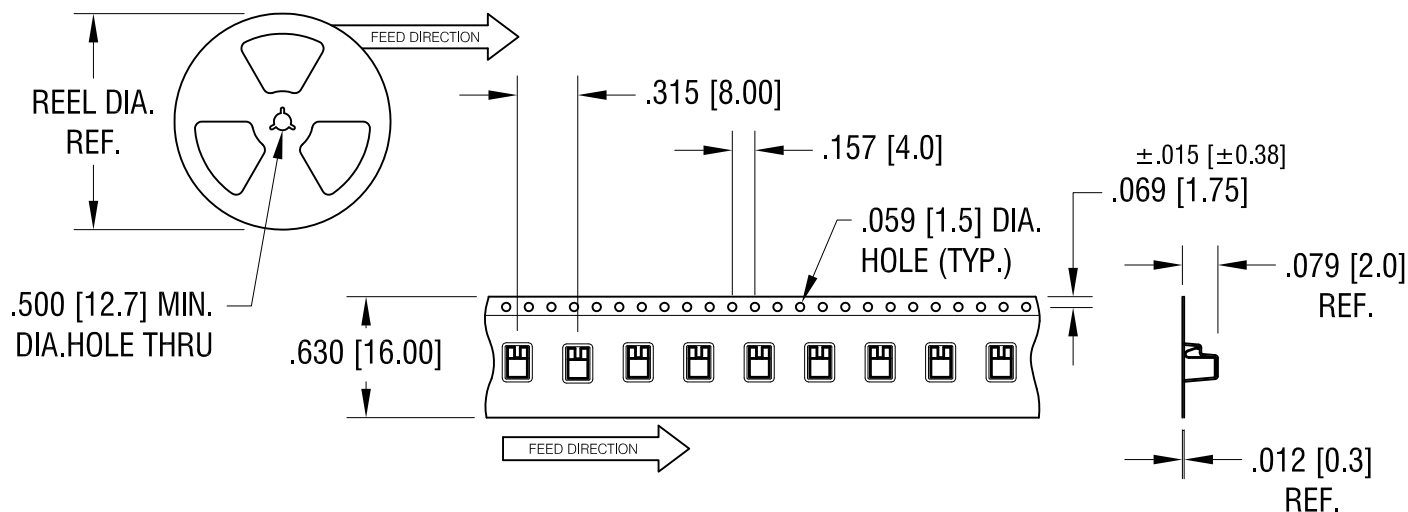

NOTES:

1. SUPPLIED ON TAPE AND REEL ONLY.

TAPE AND REEL SPECIFICATIONS:

2. TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD

3. REEL:

13.0 [330.0] DIA. 1000 PIECES OF
P/N 122 PER REEL

CONTRACT SPECIFICATIONS:

1. MAT'L- .006 [0.15] TH'K STAINLESS STEEL
2. FINISH: GOLD PLATE

12.12.16	CHANGE AS PER ECN 16-101	A
DATE	DESCRIPTION	REV.

KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME			
POSITIVE CONTACT ON TAPE & REEL			
MATERIAL			
AS NOTED			
FINISH		DRN BY	DATE
AS NOTED		NT	1.06.16
		APP'D	SCALE
		LN	N/A
TOLERANCES INCH [MM]		CODE	DWG NO.
DECIMAL ±.010 [±0.25]		C	122TR
ANGULAR ± 1°			
UNLESS OTHERWISE SPECIFIED			