


General Purpose Stand-Up Power Wirewound Resistor

PWR Series

- 3, 5, 7, and 10 watts
- 0.1 Ω to 18k Ω range
- Radial leads for PC mount
- TC's from 300 ppm/°C to +5500 ppm/°C

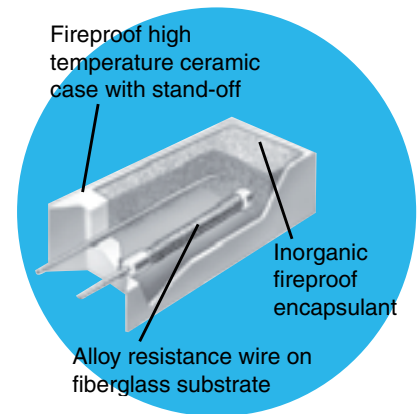


All Pb-free parts comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

Specifications

- Power Rating: 3, 5, 7, and 10 watts
- Resistance Range:
 - 3 watt: 0.1Ω to 7.5K 7 watt: 0.1Ω to 18K
 - 5 watt: 0.1Ω to 8.5K 10 watt: 0.18Ω to 18K
- Tolerance: ±5% and ±10% (refer to PWRG for tolerances less than 5% pg.129)
- Flameproof inorganic construction
- EIA RS-344, insulated fixed wirewound resistors

Physical Data

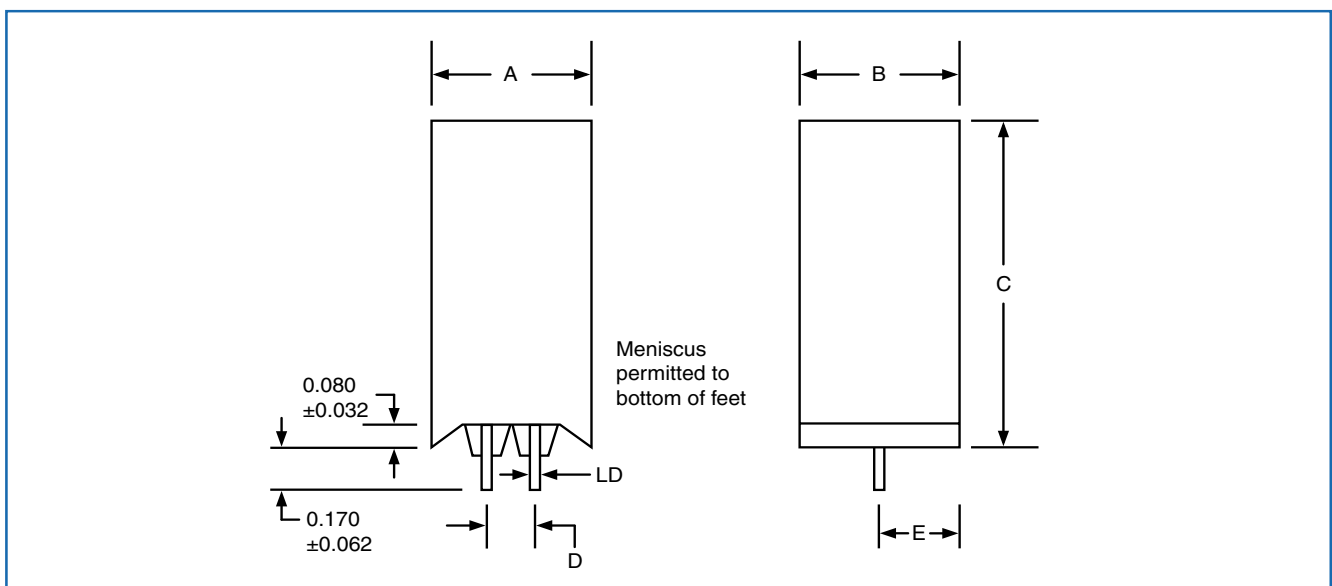

Dimensions (Inches and (mm))


IRC Type	A	B	C	D	E	LD
PWR-3	0.475 ±0.030 (12.0 ±0.8)	0.320 ±0.030 (8.1 ±0.8)	1.00 ±0.030 (25.4 ±0.8)	0.200 ±0.062 (5.08 ±1.6)	0.175 ±0.062 (4.44 ±1.6)	0.036 ±0.002 (0.91 ±0.05)
PWR-5	0.500 ±0.030 (12.7 ±0.8)	0.350 ±0.030 (8.8 ±0.8)	1.00 ±0.030 (25.4 ±0.8)	0.200 ±0.062 (5.08 ±1.6)	0.175 ±0.062 (4.44 ±1.6)	0.036 ±0.002 (0.91 ±0.05)
PWR-7	0.500 ±0.030 (12.7 ±0.8)	0.350 ±0.030 (8.8 ±0.8)	1.50 ±0.032 (38.1 ±0.81)	0.200 ±0.062 (5.08 ±1.6)	0.175 ±0.062 (4.44 ±1.6)	0.036 ±0.002 (0.91 ±0.05)
PWR-10	0.630 ±0.032 (16.0 ±0.81)	0.510 ±0.032 (13.2 ±0.81)	1.39 ±0.032 (35.3 ±0.81)	0.290 ±0.062 (7.4 ±1.6)	0.250 ±0.062 (6.4 ±1.6)	0.036 ±0.002 (0.91 ±0.05)

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

PWR Series


Temperature Rise Chart

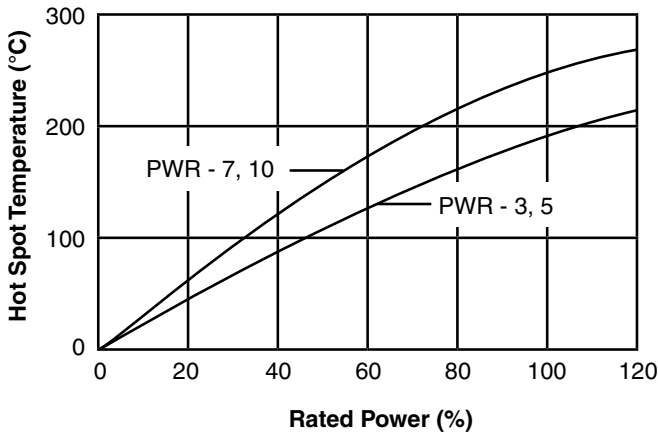

Power Derating Curve

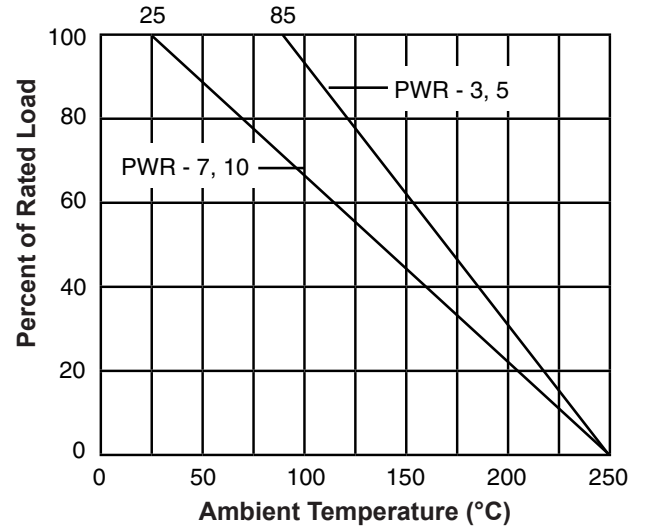

Ordering Data

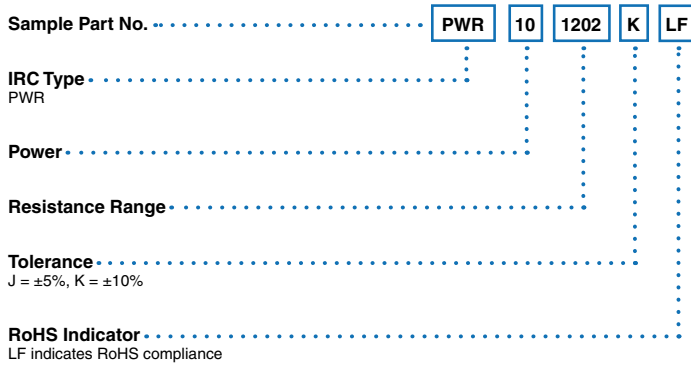

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.