

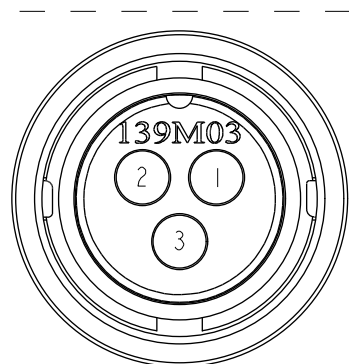
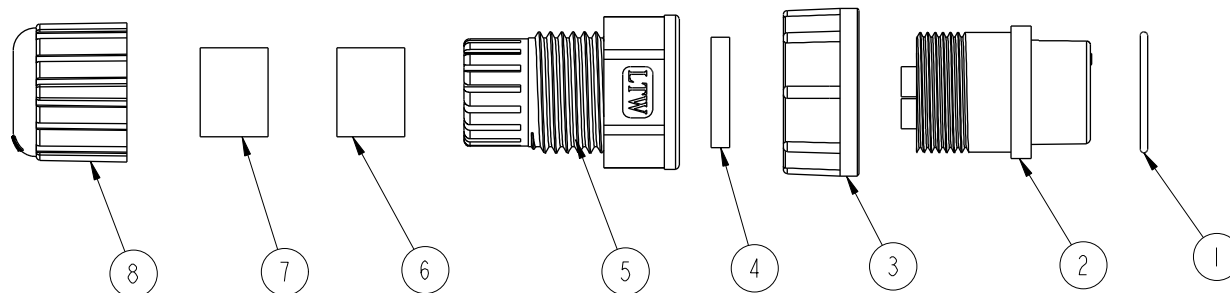




REV.	ECN NO.	DATE	SIGN	DESCRIPTION



Pin Assignments
Front View

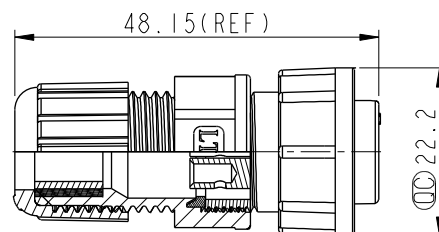

Conn.

Note:

- * QC Important Dimension To Check.
- * Waterproof Rate: IP67
- * Connector: Black, Nylon+GF
- * Female Pin: Copper Alloy, Gold Plated
- * O-Ring: EPDM
- * Lock Nut: Nylon+GF, Black
- * Gasket: EPDM, Bk
- * Clamp Ring: Nylon, Black
- * Sealing Nut: Nylon, Black
- * Seals B1 for Cable OD: $\varnothing 7.6\text{mm}$ ~ $\varnothing 9.6\text{mm}$
- * Seals B2 for Cable OD: $\varnothing 4.0\text{mm}$ ~ $\varnothing 7.6\text{mm}$
- * One Set Unassembled in One PE Bag

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
		Middle Assy Lock 3Pin F Conn F Pin		CC-03BFFA-LL7001		SamChang		2012-04-09	
TOLERANCE		SCALE		DWG NO		CHECKED BY		DATE	
.X ± 0.25		1:1		CC-03BFFA-LL7001		Jeffrey		2012-05-09	
.XX ± 0.1		SIZE		CUSTOMER		APPROVED BY		DATE	
.XXX ± 0.05		A4		ALTW		Lion		2012-05-09	
ANGLES $\pm 1^\circ$		REV.		WC-REV.					
		A		A.2					
				<u>QC</u> : Inspection item					

Amphenol LTW
安費諾亮泰企業股份有限公司