
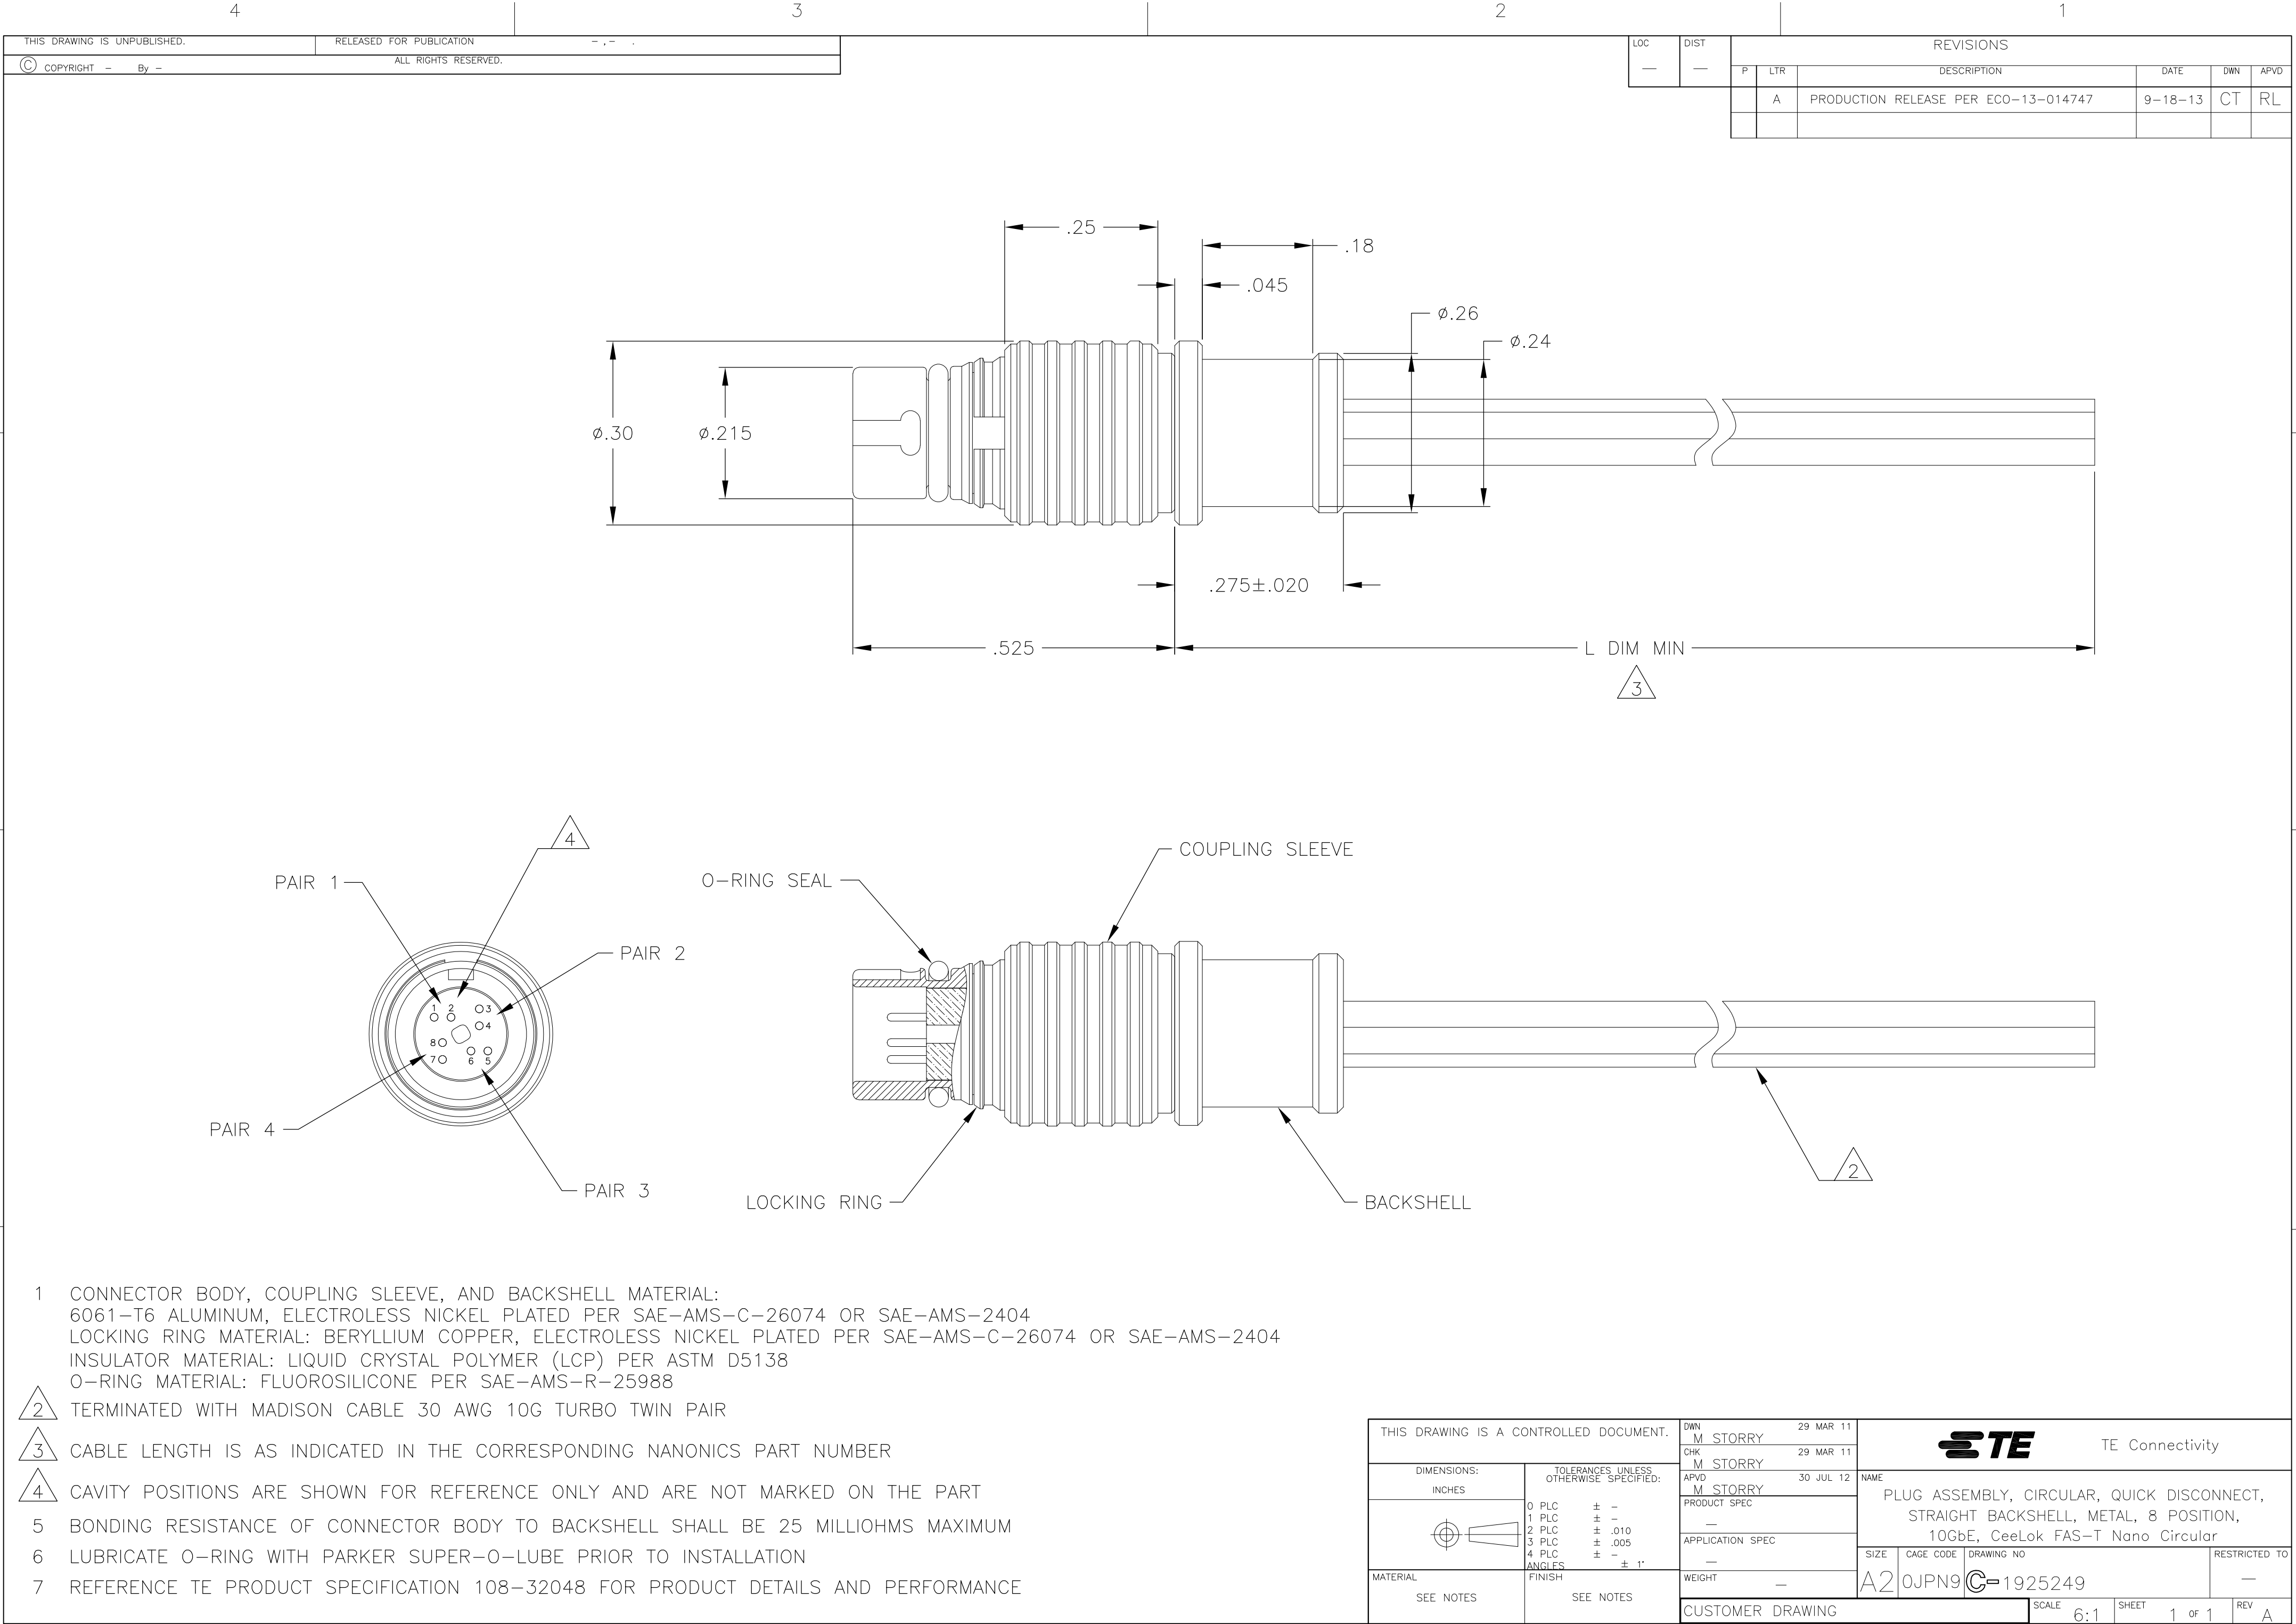




- 1 CONNECTOR BODY, COUPLING SLEEVE, AND BACKSHELL MATERIAL:
6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138
O-RING MATERIAL: FLUOROSILICONE PER SAE-AMS-R-25988
- 2 TERMINATED WITH MADISON CABLE 30 AWG 10G TURBO TWIN PAIR
- 3 CABLE LENGTH IS AS INDICATED IN THE CORRESPONDING NANONICS PART NUMBER
- 4 CAVITY POSITIONS ARE SHOWN FOR REFERENCE ONLY AND ARE NOT MARKED ON THE PART
- 5 BONDING RESISTANCE OF CONNECTOR BODY TO BACKSHELL SHALL BE 25 MILLIOHMS MAXIMUM
- 6 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION
- 7 REFERENCE TE PRODUCT SPECIFICATION 108-32048 FOR PRODUCT DETAILS AND PERFORMANCE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M STORRY 29 MAR 11		 TE Connectivity									
		CHK M STORRY 29 MAR 11											
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M STORRY 30 JUL 12		NAME							
		0 PLC ± -		PRODUCT SPEC		PLUG ASSEMBLY, CIRCULAR, QUICK DISCONNECT, STRAIGHT BACKSHELL, METAL, 8 POSITION, 10GbE, CeeLok FAS-T Nano Circular							
		1 PLC ± -		—									
		2 PLC ± .010		—									
		3 PLC ± .005		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO							
		4 PLC ± -		—									
MATERIAL		FINISH		WEIGHT		A2		0JPN9		C-1925249		RESTRICTED TO	
SEE NOTES		SEE NOTES		—								—	
				CUSTOMER DRAWING				SCALE		6:1		SHEET	
										1 of 1		REV	
												A	