


LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
GP	00				
		AS		REVISED PER ECO-12-021696	01MAR2013

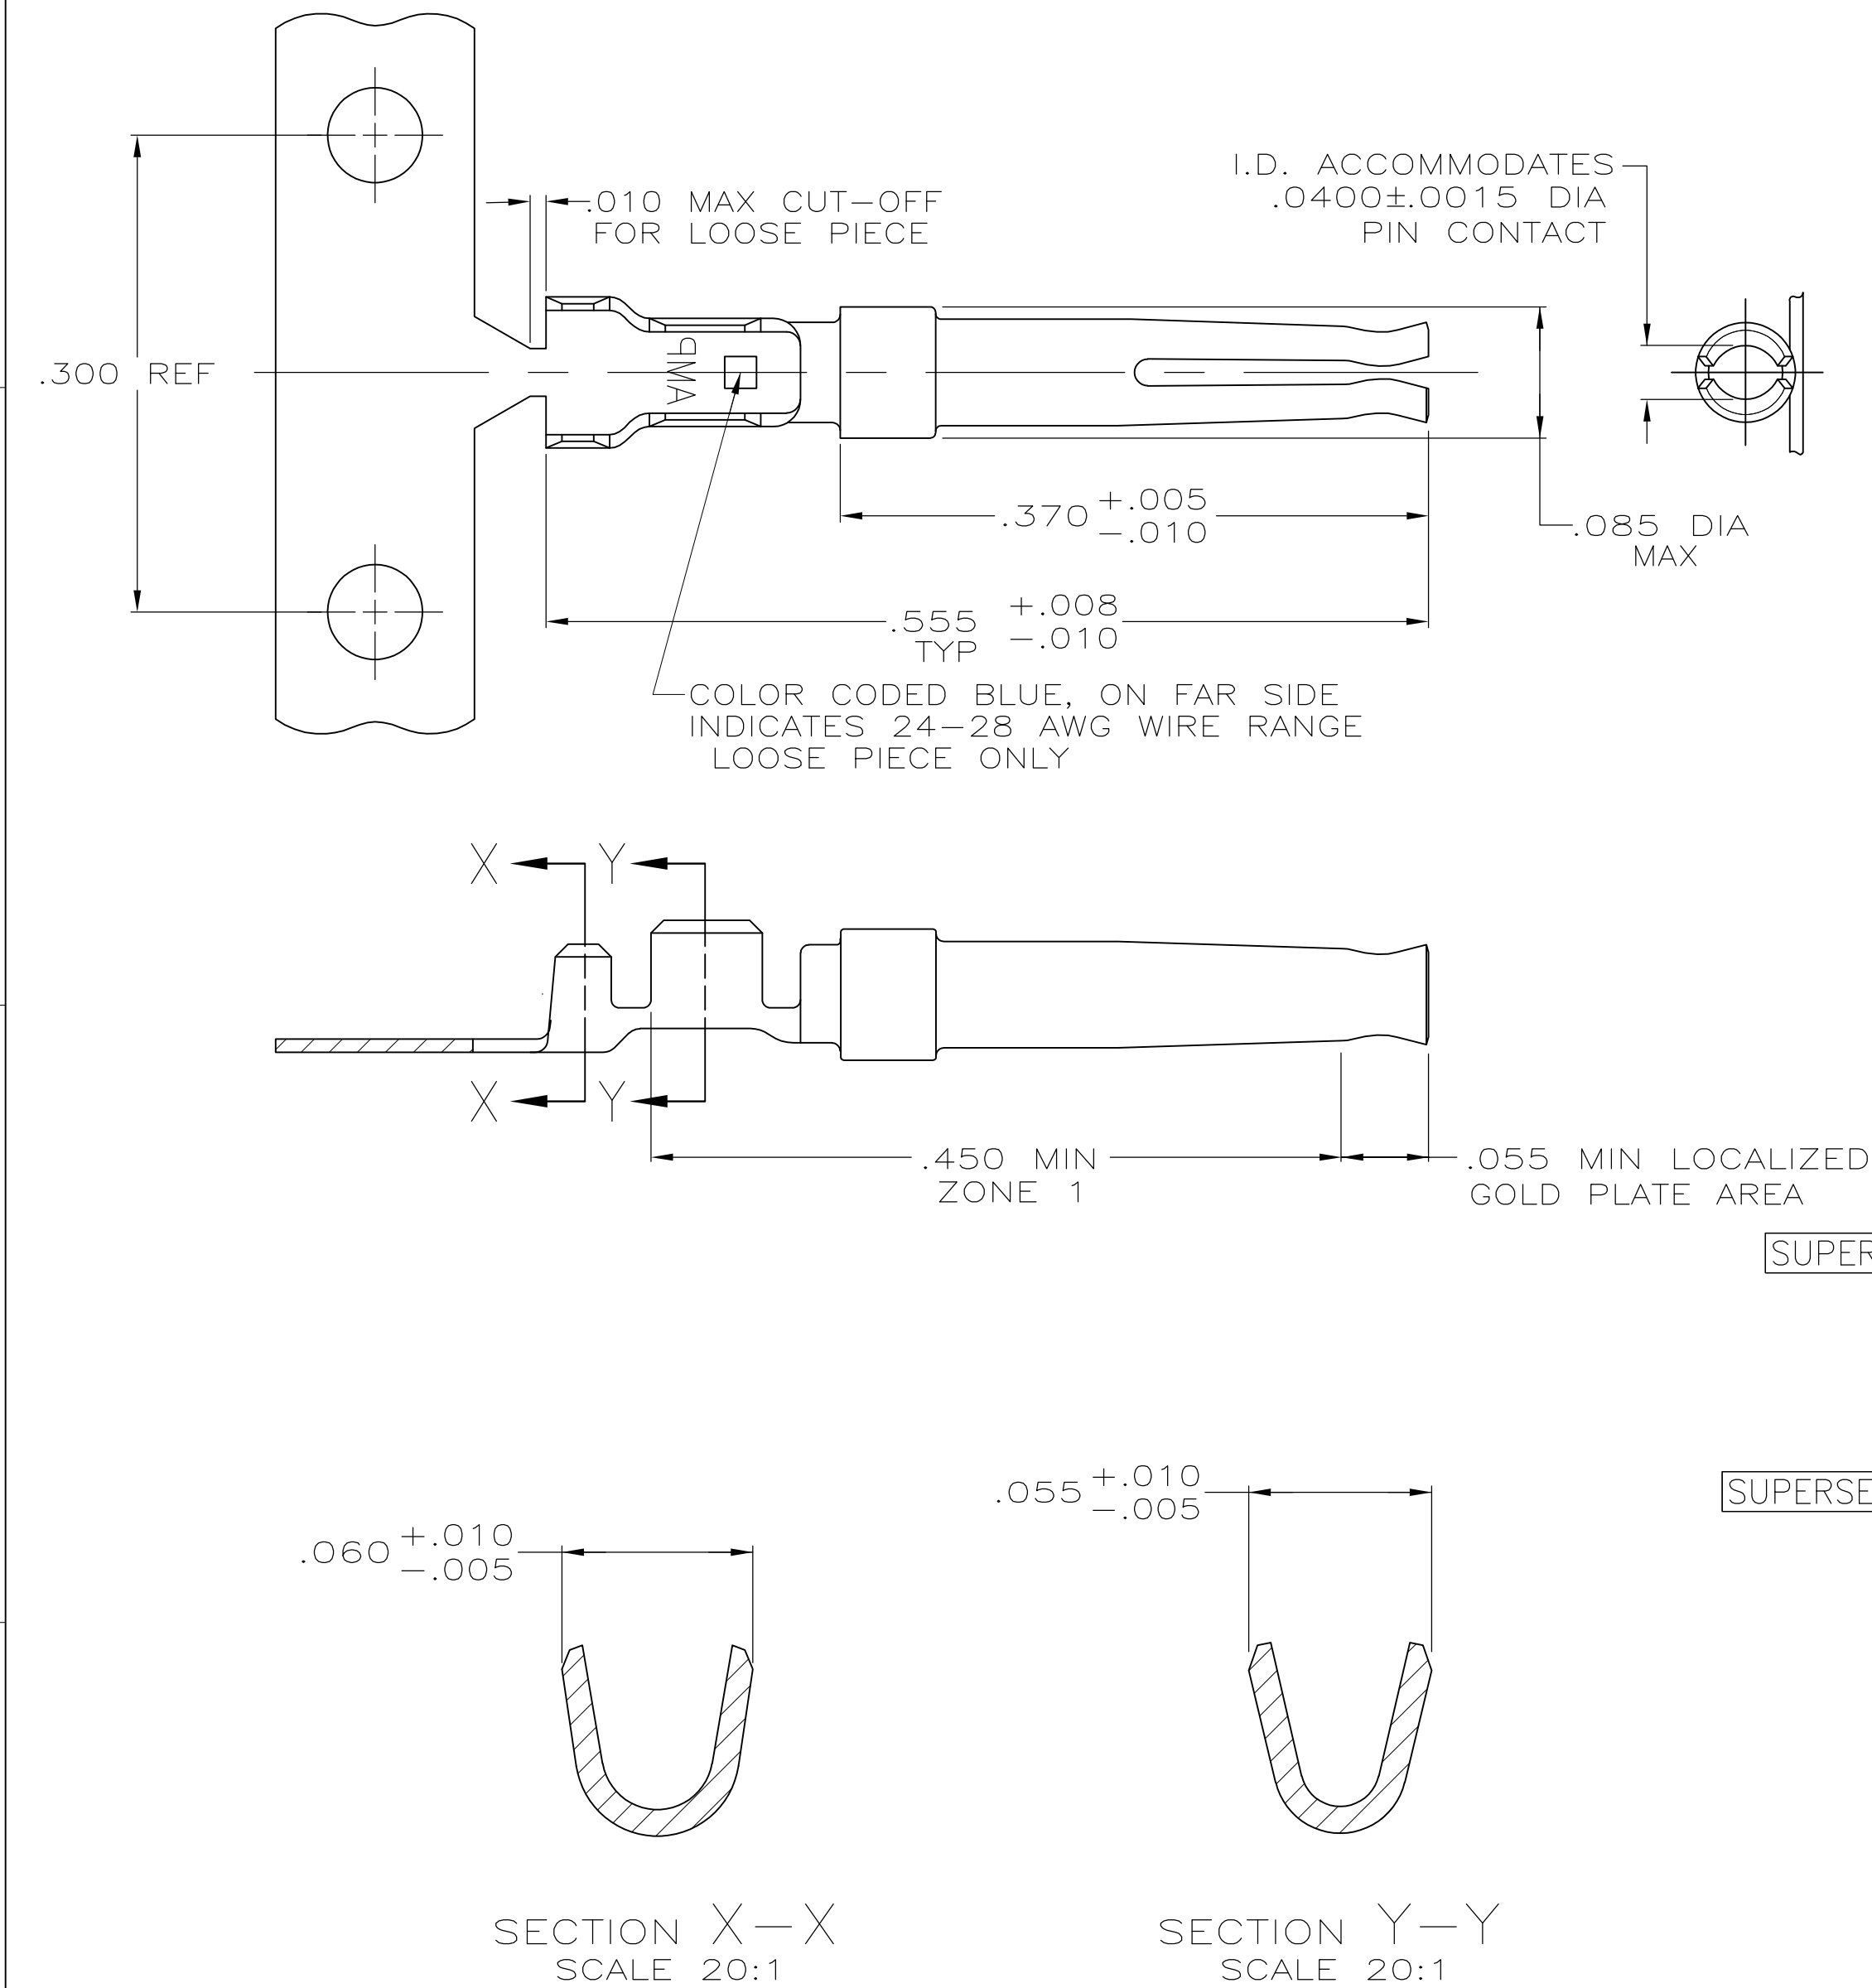

- 1

FOR MINI-APPLICATOR AND STRIPPER CRIMPER.
- 2

FOR HAND TOOL USE ONLY.
- 3

FOR STANDARD APPLICATOR PART #566184 ONLY.
- 4

WIRE RANGE OF 24-28, INSULATION RANGE OF .030-.040.
- 5

GOLD PLATING MAY NOT APPEAR ON CARRIER STRIP. NICKEL UNDERPLATE COVERS ENTIRE CONTACT.
- 6

GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290, TIN PLATING PER MIL-T-10727, COPPER PLATING PER MIL-C-14550.
- 7

PLATED WITH .000050 GOLD ON INSIDE OF LOCALIZED GOLD PLATE AREA, .000050 GOLD ON ZONE 1, ALL OVER .000050 NICKEL UNDERPLATE.
- 8

PLATED WITH .000030 GOLD ON INSIDE OF LOCALIZED GOLD PLATE AREA, GOLD FLASH ON ZONE 1, ALL OVER .000050 NICKEL UNDERPLATE.
OR
GOLD FLASH OVER PALLADIUM-NICKEL, .000030 TOTAL ON INSIDE OF LOCALIZED GOLD PLATE AREA, GOLD FLASH ON ZONE 1, ALL OVER .000050 NICKEL UNDERPLATE.
- 9

GOLD FLASH ON INSIDE OF LOCALIZED GOLD PLATE AREA, GOLD FLASH ON ZONE 1, ALL OVER .000030 NICKEL UNDERPLATE.
- 10

PLATED WITH .000100-.000200 TIN.
- 11

PLATED WITH .000050 GOLD ON INSIDE OF LOCALIZED GOLD PLATE AREA, GOLD FLASH ON ZONE 1, ALL OVER .000050 NICKEL UNDERPLATE.
- 12

PLATED WITH .000015 GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH ON REMAINDER, OVER .000050 NICKEL.
- 13

PLATED WITH GOLD FLASH IN LOCALIZED GOLD PLATE AREA, TIN PLATED WIRE BARRELS, OVER .000030 NICKEL.
- 14

PLATED WITH .000030 GOLD IN LOCALIZED GOLD PLATE AREA, TIN PLATED WIRE BARRELS, OVER .000050 NICKEL.
- 15

AMP ITALY PART NUMBER ONLY.

OBSOLETE	STANDARD	13	3	STRIP	7-66505-0
	SMALL PACK	8	2	LOOSE PIECE	6-66505-9
SUPERSEDED BY 66505-9		14	2	LOOSE PIECE	6-66505-2
OBSOLETE	STANDARD	14	1	STRIP	6-66505-0
OBSOLETE	STANDARD	13	2	LOOSE PIECE	5-66505-9
OBSOLETE	STANDARD	13	1	STRIP	5-66505-7
15 OBSOLETE	STANDARD	12	1	STRIP	5-66505-5
SUPERSEDED BY 5-66505-7		11	1	STRIP	2-66505-7
		10	1	STRIP	1-66505-4
		9	3	STRIP	1-66505-3
OBSOLETE	STANDARD	8	3	STRIP	1-66505-2
		9	2	LOOSE PIECE	1-66505-0
		8	2	LOOSE PIECE	66505-9
		7	2	LOOSE PIECE	66505-8
		9	1	STRIP	66505-4
		8	1	STRIP	66505-3
		7	1	STRIP	66505-2
PACKAGING TYPE		FINISH	USE	TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009

DIMENSIONS:
INCHES

MATERIAL
PHOSPHOR BRONZE

6

SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -
FINISH

DWN
C.RICHARD
CHK
S.WELDON
APVD
-
PRODUCT SPEC
-
APPLICATION SPEC
114-10000
WEIGHT
-
CUSTOMER DRAWING

1-6-87
1-7-87

NAME

SOCKET CONTACT, SIZE 20 DF,
24-28 AWG, W/ .030-.040 DIA
INSULATION SUPPORT,

SIZE
A2
CAGE CODE
00779
DRAWING NO
C=66505
SCALE
10:1
SHEET
1 of 1
REV
AS

1471-9 (3/11)