



4

3

2


1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW DRAWING	14JAN2016	NK	RH

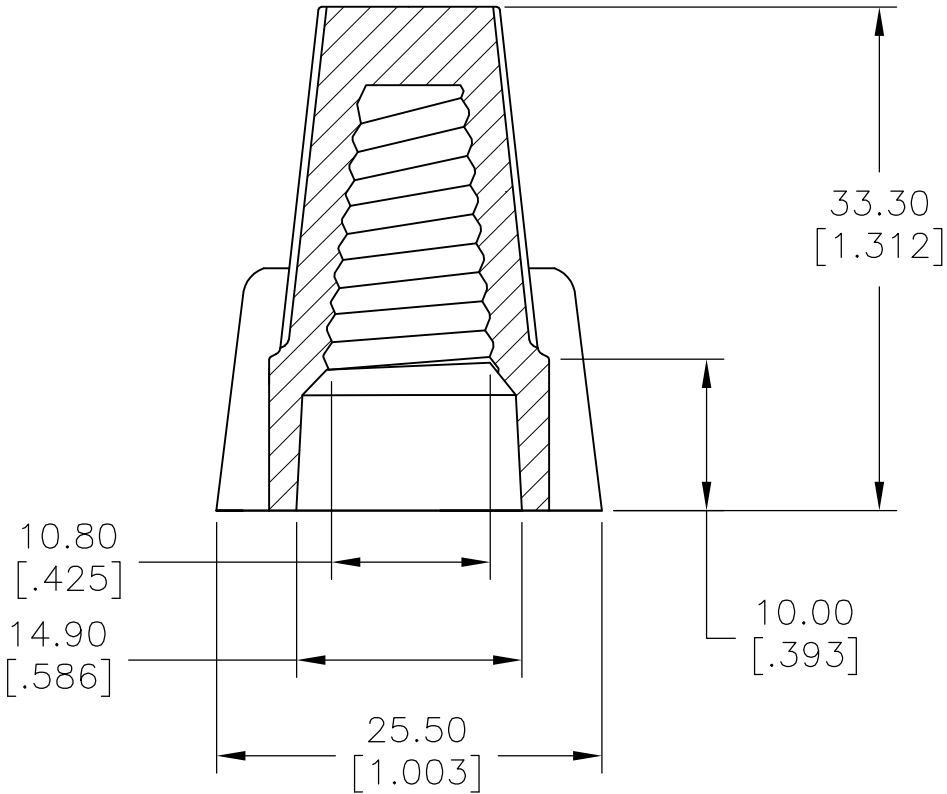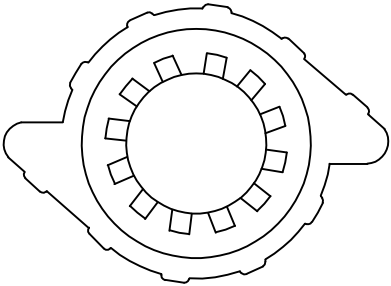

- 1
- WORKING TEMPERATURE: 105° C
- 2
- VOLTAGE: 600V MAX.
- 3
- COLOR: GREY
- 4
- WIRE RANGE: #18—#8 AWG MAX.3#10
MIN.3#14 W/1 #18
- 5
- SPRING INSERT: STEEL

2299509–1 AS SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 14JAN2016	 TE Connectivity			
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK HILL RYAN 14JAN2016	NAME			
		APVD HILL RYAN 14JAN2016				
	0 PLC ± — 1 PLC ± 0.2[.007] 2 PLC ± 0.4[.015] 3 PLC ± — 4 PLC ± — ANGLES ± —	PRODUCT SPEC —	CPGI—WC—TG—GR—BULK			
		APPLICATION SPEC —				
MATERIAL TOUGH THERMOPLASTIC UL 94V-2 FLAME-RETARDANT	FINISH —	WEIGHT —	SIZE A3	CAGE CODE 00779	DRAWING NO C-2299509	RESTRICTED TO —
		CUSTOMER DRAWING				SCALE 2:1