OVS Series

Features

- 105℃, 20,000 hours assured
- Ultra low ESR, solid capacitors of SMD tyep
- RoHS Compliance

Marking color: Blue

Specifications

Items	Performance
Category Temperature Range	-55℃ ~ +105℃
Capacitance Tolerance	±20% (at 120Hz, 20℃)
Leakage Current (at 20℃)*	Rated voltage applied, after 2 minutes at 20℃. See Standard Ratings
Tanδ (at120Hz, 20℃)	See Standard Ratings
ESR (at 100k ~ 300k Hz, 20℃)	See Standard Ratings
Endurance	Test Time: 20,000 Hrs Capacitance Change: Within ±20% of initial value Tanδ: Less than 150% of specified value ESR: Less than 150% of specified value Leakage Current: Within specified value * The above specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied for 20,000 hours at 105℃.
Moisture Resistance	Test Time: 1,000 Hrs Capacitance Change: Within ±20% of initial value Tanδ: Less than 150% of specified value ESR: Less than 150% of specified value Leakage Current: Within specified value * The above specifications shall be satisfied when the capacitors are restored to 20℃ after subjecting them at 60℃, 90 to 95% RH for 1,000 hours. Leakage current should be tested after voltage treatment*.
Resistance to Soldering Heat * (Please refer to page 25 for reflow soldering conditions)	Capacitance Change: Within ±10% of initial value Tanδ: Less than 130% of specified value ESR: Less than 130% of specified value Leakage Current: Within specified value
Ripple Current and Frequency Multipliers	Frequency (Hz): 120 ≦ f < 1k; 1k ≦ f < 10k; 10k ≦ f < 100k; 100k ≦ f < 500k Multiplier: 0.05; 0.3; 0.7; 1.0

* For any doubt about measured values, measure the leakage current again after the following voltage treatment.
Voltage treatment: DC rated voltage is applied to the capacitors for 2 hours at 105℃.

Diagram of Dimensions

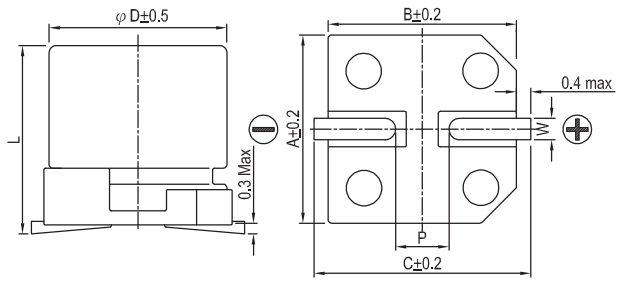

Lead Spacing and Diameter — Unit: mm

φD	L	A	B	C	W	P ± 0.2
5	5.8 ± 0.3	5.3	5.3	5.9	0.5 ~ 0.8	1.5
6.3	5.8 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
8	6.7 ± 0.3	8.4	8.4	9.0	0.7 ~ 1.1	3.1

Marking

φD = 5 ~ 6.3



φD = 8 ~ 10

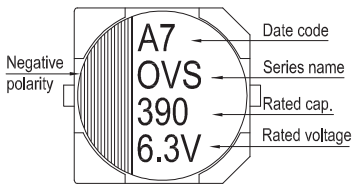

Dimension: ϕD×L(mm)
Ripple Current: mA/rms at 100k Hz, 105℃

Standard Ratings

W. V. (V)	Surge Voltage (V)	Capacitance (μF)	Size ϕD×L(mm)	Tanδ (120Hz, 20℃)	L C (μA)	E S R (mΩ/at 100k ~ 300k Hz, 20℃ Max)	Rated R. C. (mA/rms at 100k Hz, 105℃)
4V (0G)	4.6	150	5 × 5.8	0.12	120	25	2,150
		560	8 × 6.7	0.12	440	22	3,220
6.3V (0J)	7.2	47	5 × 5.8	0.12	59	30	1,970
		100	5 × 5.8	0.12	126	20	2,150
		120	6.3 × 5.8	0.12	151	22	2,570
		220	6.3 × 5.8	0.12	277	22	2,570
		390	8 × 6.7	0.12	491	22	3,220
10V(1A)	12.0	33	5 × 5.8	0.12	66	70	1,100
		68	5 × 5.8	0.12	136	30	1,970
		120	6.3 × 5.8	0.12	240	27	2,320
16V(1C)	18.4	22	5 × 5.8	0.12	70	90	1,060
		39	5 × 5.8	0.12	125	35	1,820
		39	6.3 × 5.8	0.12	125	37	2,050
		68	6.3 × 5.8	0.12	218	30	2,200
		82	8 × 6.7	0.12	262	30	2,760
		120	8 × 6.7	0.12	384	27	2,900

Part Numbering System

OVS Series	120μF	±20%	16V	Carrier Tape		8ϕ×6.7L	Pb-free and PET coating case
OVS	**121**	**M**	**1C**	**TR**	**-**	**0806**	
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case size	Lead Wire and Coating Type

Note: For more details, please refer to “Part Numbering System (SMD Type)” on page 15.

All product specifications in the catalog are subject to change without notice. (CAT. 2017E1)