

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
	A	REVISED PER ECO-12-017504			08OCT2012	KH	JE	

- 1

FINISH:
CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON
TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
COMPLIANT PIN AREA: 0.5µm MIN MATTE TIN OVER BASE PLATING.
- 2

PHOSPHOR BRONZE
- 3

GLASS FILLED POLYESTER
- 4





DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 5

CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6

REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 7

APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- 8

CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

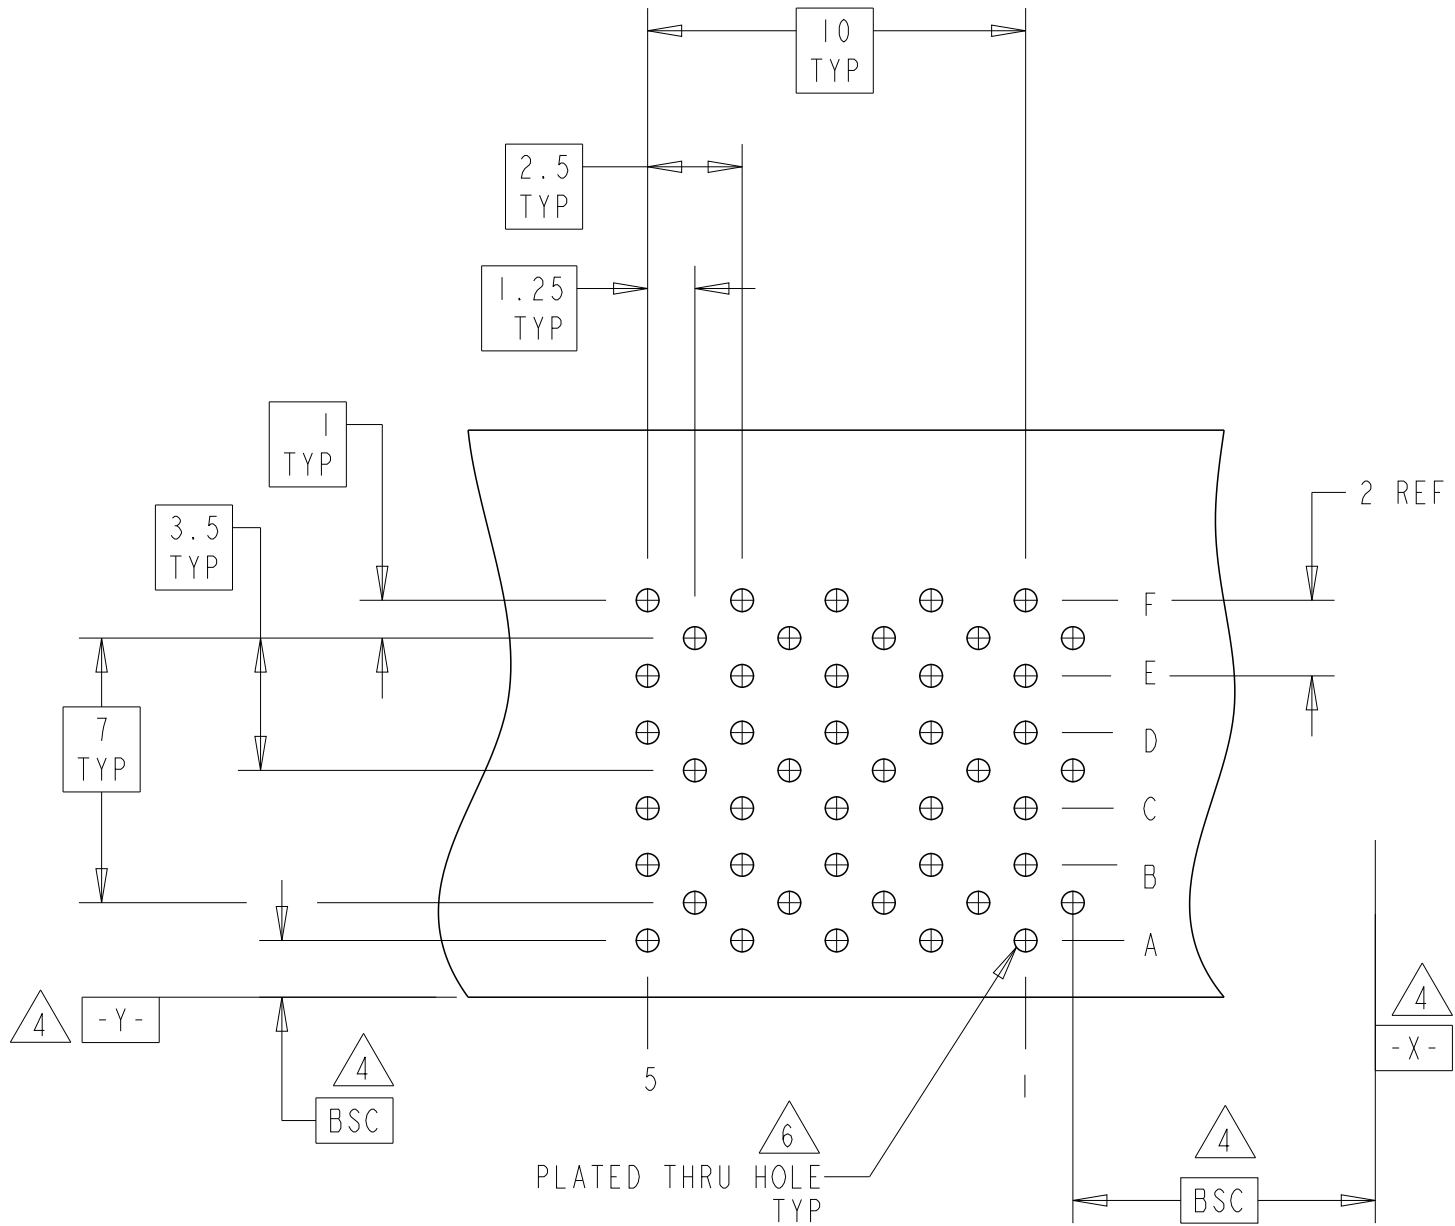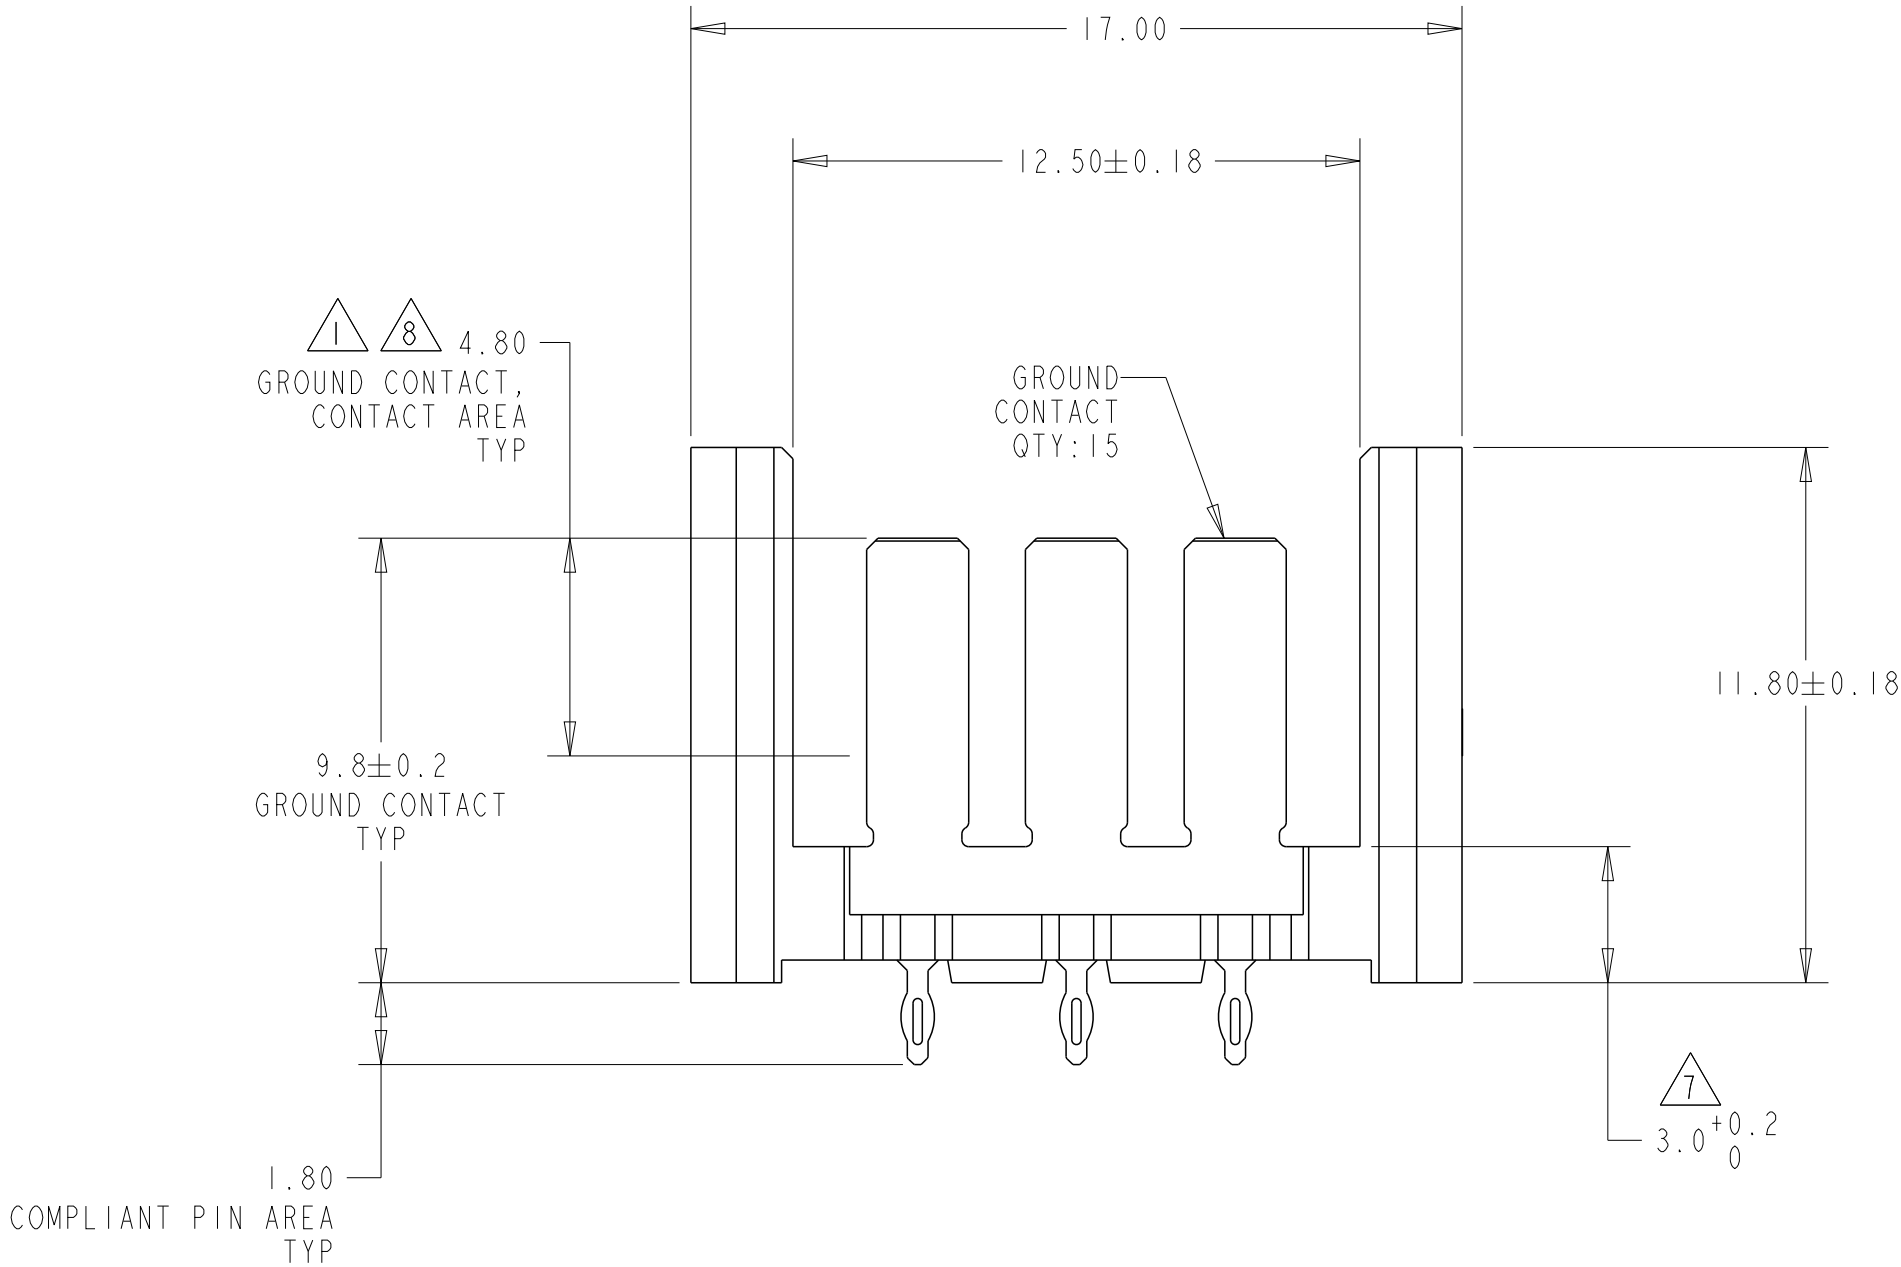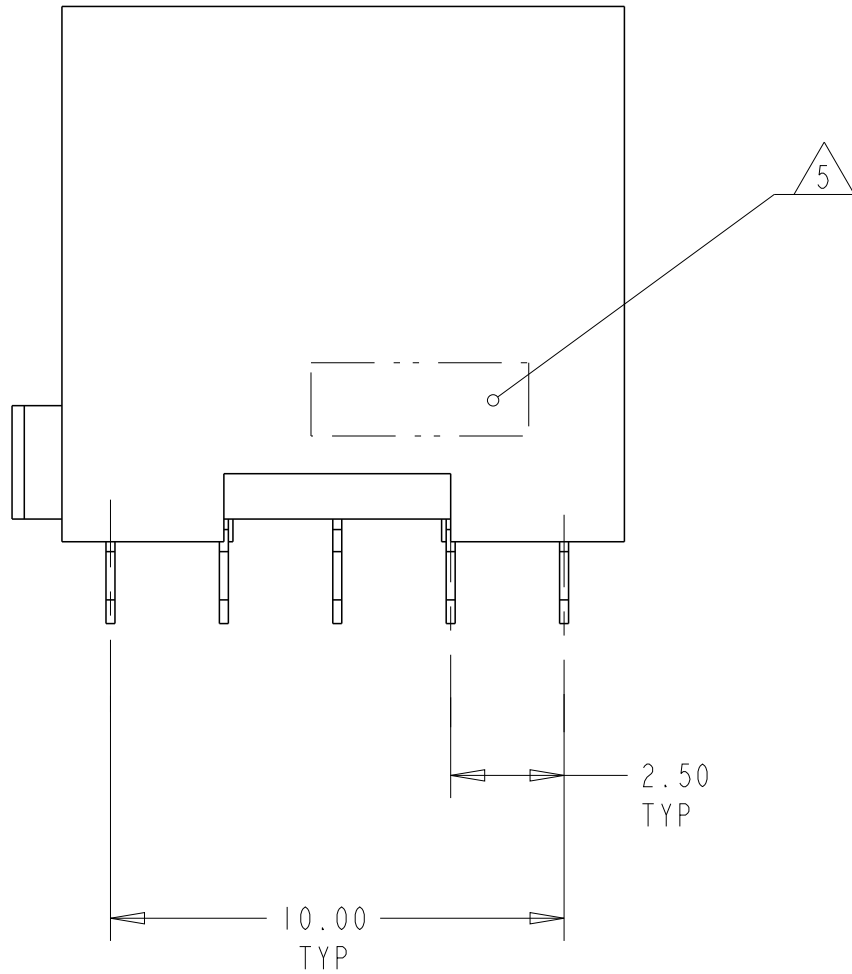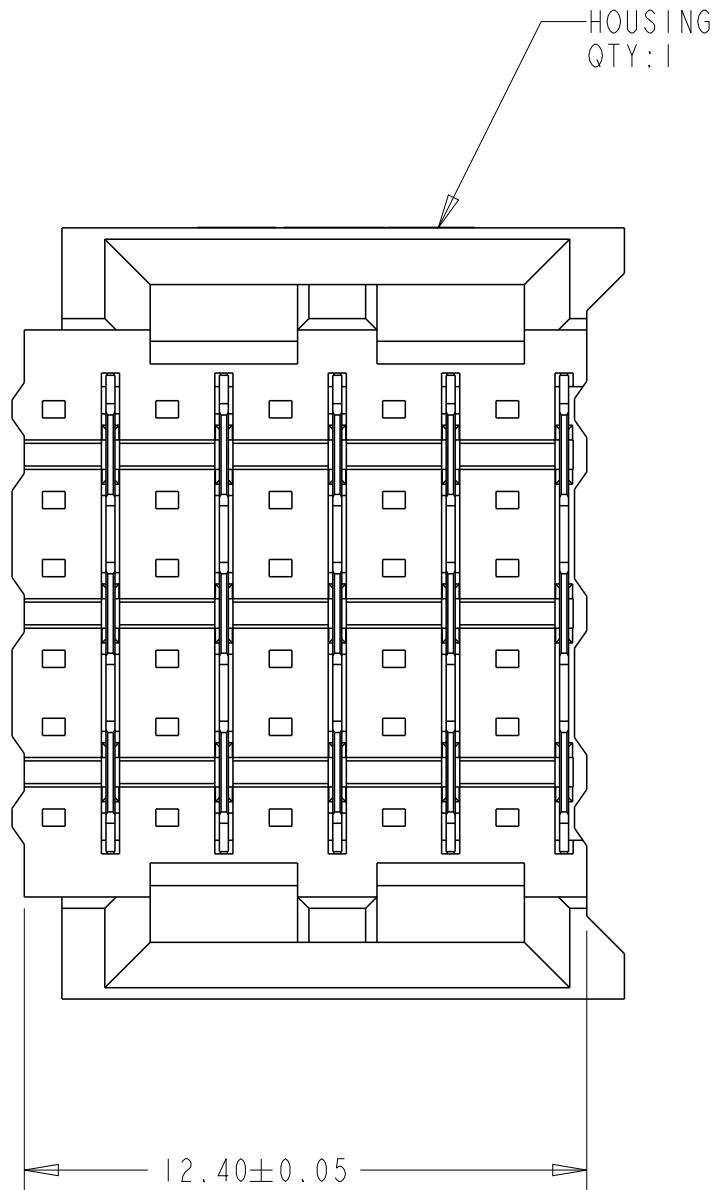

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

5120743-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO	07DEC04	 TE Connectivity	
		CHK R. PATTERSON	07DEC04		
DIMENSIONS:		APVD R. PATTERSON	07DEC04	NAME SHROUD ASSEMBLY, 30 POSITION, 6 ROW, BACKPLANE CONNECTOR, Z-PACK HS3	
mm		PRODUCT SPEC			
		APPLICATION SPEC		SIZE A1	
		WEIGHT			
MATERIAL HOUSING: 3		GROUND CONTACT: 1		CAGE CODE 00779	
CONTACTS: 2		CUSTOMER DRAWING		DRAWING NO 5120743	
				RESTRICTED TO -	
				SCALE 6:1	
				SHEET 1	
				OF 1	
				REV A	