
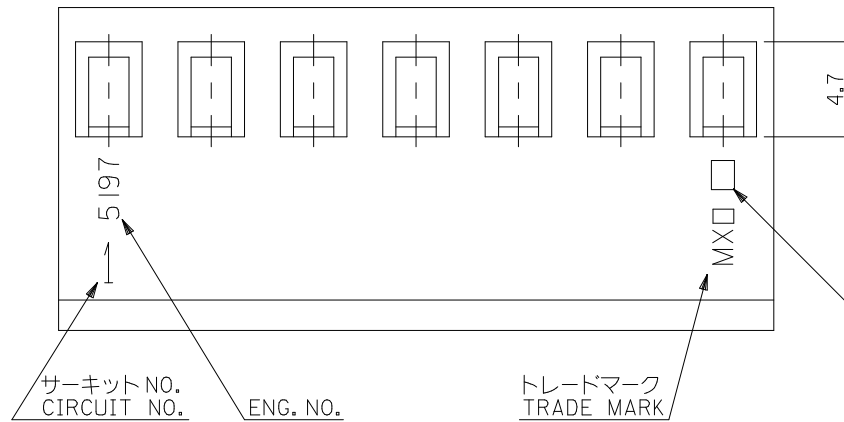
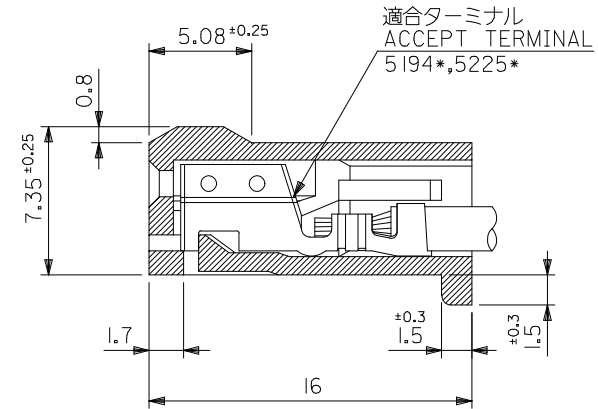


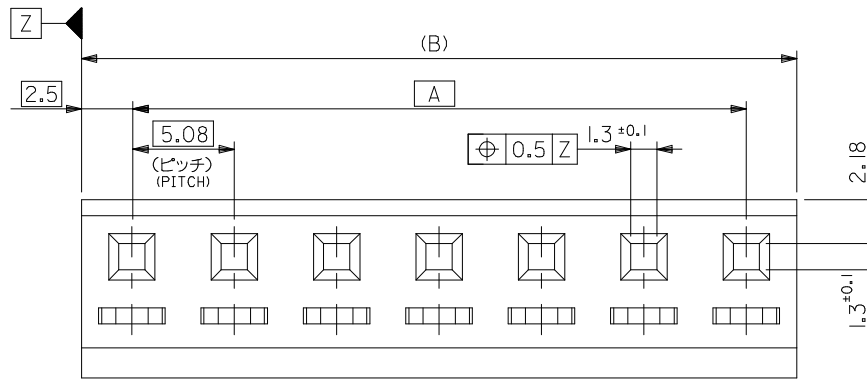

注記 NOTES

- 各部の反りは0.5最大。
WARPING : 0.5 MAX.
- サーキットNO.はNO."I"のみ表示。
CIRCUIT NO. : I ONLY.

30.4	25.4	39-01-1060	5197-063	6
10.08	5.08	39-01-1020	5197-023	2
B	A	EDP NO.	MATERIAL NO.	極数 NO. OF CXTS.
			MODEL NO.	5197-N3
			THIRD ANGLE PROJECTION	

REVISED	EC NO. J2009-0049 DRWN:NAKAMURA CHKD:T. HARUYAMA APPR:NUKITA	2008/07/23 2008/07/23 2008/07/23 2008/11/14	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				10 UNDER	± 0.2	DRAWN BY T. ASAKAWA	DATE '95/5/9	TITLE SPOX 5.08 PITCH RECEPTACLE HOUSING			
				10 OVER 30 UNDER	± 0.25	CHECKED BY H. HIRAMOTO	DATE '95/5/9				
				30 OVER	± 0.3	APPROVED BY M. FUKUSHIMA	DATE '95/5/9	MOLEX INCORPORATED			
				ANGULAR	± 3 °	MATERIAL NO.					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-5197-001		1 OF 1	
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

材料
MATERIAL
ナイロン66, UL94V-0
NYLON66, UL94V-0