


HRDB SERIES

Delay-on-Break Timer



Wiring Diagram

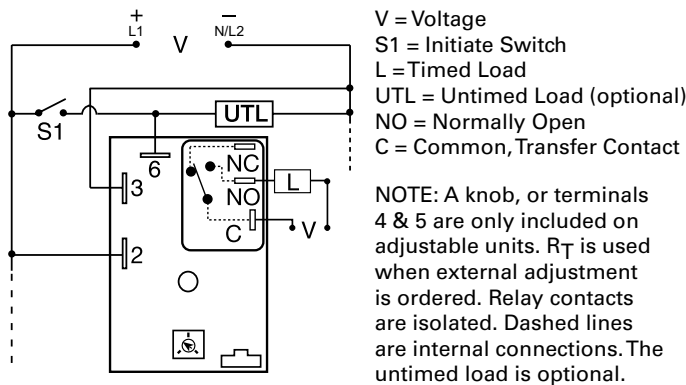

Description

The HRDB Series combines an electromechanical, relay output with microcontroller timing circuitry. The HRDB offers 12 to 230V operation in five options and factory fixed, external, or onboard adjustable time delays with a repeat accuracy of $\pm 0.5\%$. The isolated output contact rating allows for direct operation of heavy loads, such as compressors, pumps, blower motors, heaters, etc. The HRDB is ideal for OEM applications where cost is a factor.

Operation (Delay-on-Break)

Input voltage must be applied before and during timing. Upon closure of the initiate switch, the output relay energizes. The time delay begins when the initiate switch is opened. The output remains energized during timing. At the end of the time delay, the output de-energizes. The output will energize if the initiate switch is closed when input voltage is applied.

Reset: Reclosing the initiate switch during timing resets the time delay. Loss of input voltage resets the time delay and output.

Features & Benefits

| FEATURES | BENEFITS |
|--|---|
| Microcontroller based | Repeat Accuracy $\pm 0.5\%$ |
| Compact, low cost design | Allows flexibility for OEM applications |
| Isolated, 30A, SPDT, NO output contacts | Allows direct operation of heavy loads: compressors, pumps, blower motors, heaters. |

Accessories



P1004-95, P1004-95-X Versa-Pot
Panel mountable, industrial potentiometer recommended for remote time delay adjustment.



P1023-6 Mounting bracket
The 90° orientation of mounting slots makes installation/removal of modules quick and easy.



P0700-7 Versa-Knob
Designed for 0.25 in (6.35 mm) shaft of Versa-Pot. Semi-gloss industrial black finish.

Ordering Information

| MODEL | INPUT VOLTAGE | ADJUSTMENT | TIME TOLERANCE | TIME DELAY | MODEL | INPUT VOLTAGE | ADJUSTMENT | TIME TOLERANCE | TIME DELAY |
|------------|---------------|------------|----------------|------------|---------|---------------|------------|----------------|------------|
| HRDB1110M | 12VDC | Fixed | + / -5% | 10m | HRDB223 | 24VAC | Onboard | + / -5% | 0.1 - 10m |
| HRDB117S | 12VDC | Fixed | + / -5% | 7s | HRDB321 | 24VDC | Onboard | + / -5% | 1 - 100s |
| HRDB120 | 12VDC | Onboard | + / -5% | 0.1 - 10s | HRDB324 | 24VDC | Onboard | + / -5% | 1 - 100m |
| HRDB121 | 12VDC | Onboard | + / -5% | 1 - 100s | HRDB423 | 120VAC | Onboard | + / -5% | 0.1 - 10m |
| HRDB124 | 12VDC | Onboard | + / -5% | 1 - 100m | HRDB623 | 230VAC | Onboard | + / -5% | 0.1 - 10m |
| HRDB21A65M | 24VAC | Fixed | + / -1% | 65m | | | | | |

If you don't find the part you need, call us for a custom product 800-843-8848

HRDB SERIES

Accessories




P1015-13 (AWG 10/12), **P1015-64** (AWG 14/16)
Female Quick Connect
 These 0.25 in. (6.35 mm) female terminals are constructed with an insulator barrel to provide strain relief.



P1015-18 Quick Connect to Screw Adapter
 Screw adapter terminal designed for use with all modules with 0.25 in. (6.35 mm) male quick connect terminals.




C103PM (AL) DIN Rail
 35 mm aluminum DIN rail available in a 36 in. (91.4 cm) length.



P1023-20 DIN Rail Adapter
 Allows module to be mounted on a 35 mm DIN type rail with two #10 screws.

External Resistance vs. Time Delay

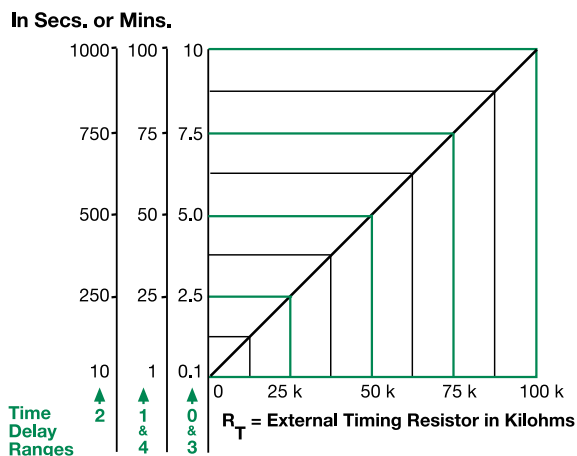

This chart applies to externally adjustable part numbers. The time delay is adjustable over the time delay range selected by varying the resistance across the RT terminals; as the resistance increases the time delay increases. When selecting an external RT, add the tolerances of the timer and the RT for the full time range adjustment.
Examples: 1 to 50 S adjustable time delay, select time delay range 1 and a 50 K ohm RT. For 1 to 100 S use a 100 K ohm RT.

Function Diagram



Specifications

| | | | | | | | | | | |
|--|---|----------------|----------------|----------------|------------|--------|--------|-------|-----|-----|
| Time Delay Type | Microcontroller circuitry | | | | | | | | | |
| Range | 0.1s - 100m in 5 adjustable ranges or fixed | | | | | | | | | |
| Repeat Accuracy | ±0.5 % or 20ms, whichever is greater | | | | | | | | | |
| Tolerance (Factory Calibration) | ±1%, ±5% | | | | | | | | | |
| Reset Time | ≤ 150ms | | | | | | | | | |
| Initiate Time | ≤ 20ms | | | | | | | | | |
| Time Delay vs Temp. & Voltage | ±2% | | | | | | | | | |
| Input Voltage | 12 or 24VDC; 24, 120, or 230VAC | | | | | | | | | |
| Tolerance | | | | | | | | | | |
| 12VDC & 24VDC | -15% - 20% | | | | | | | | | |
| 24 to 230VAC | -20% - 10% | | | | | | | | | |
| AC Line Frequency | 50/60 Hz | | | | | | | | | |
| Power Consumption | AC ≤ 4VA; DC ≤ 2W | | | | | | | | | |
| Output Type | Electromechanical relay | | | | | | | | | |
| Form | Isolated, SPDT | | | | | | | | | |
| Ratings | | | | | | | | | | |
| General Purpose Resistive | <table border="0"> <tr> <td></td> <td>SPDT-NO</td> <td>SPDT-NC</td> </tr> <tr> <td>125/240VAC</td> <td>30A</td> <td>15A</td> </tr> <tr> <td>28VDC</td> <td>20A</td> <td>10A</td> </tr> </table> | | SPDT-NO | SPDT-NC | 125/240VAC | 30A | 15A | 28VDC | 20A | 10A |
| | SPDT-NO | SPDT-NC | | | | | | | | |
| 125/240VAC | 30A | 15A | | | | | | | | |
| 28VDC | 20A | 10A | | | | | | | | |
| Motor Load | <table border="0"> <tr> <td>125VAC</td> <td>1 hp*</td> <td>1/4 hp**</td> </tr> <tr> <td>240VAC</td> <td>2 hp**</td> <td>1 hp**</td> </tr> </table> | 125VAC | 1 hp* | 1/4 hp** | 240VAC | 2 hp** | 1 hp** | | | |
| 125VAC | 1 hp* | 1/4 hp** | | | | | | | | |
| 240VAC | 2 hp** | 1 hp** | | | | | | | | |
| Life | Mechanical - 1 x 10 ⁶ ; Electrical - 1 x 10 ⁵ , *3 x 10 ⁴ , **6,000 | | | | | | | | | |
| Protection | | | | | | | | | | |
| Surge Circuitry | IEEE C62.41-1991 Level A Encapsulated | | | | | | | | | |
| Dielectric Breakdown | ≥ 2000V RMS terminals to mounting surface | | | | | | | | | |
| Insulation Resistance | ≥ 100 MΩ | | | | | | | | | |
| Polarity | DC units are reverse polarity protected | | | | | | | | | |
| Mechanical Mounting Dimensions | Surface mount with one #10 (M5 x 0.8) screw H 50.8 mm (2"); W 50.8 mm (2"); D 38.1 mm (1.51") | | | | | | | | | |
| Termination | 0.25 in. (6.35 mm) male quick connect terminals | | | | | | | | | |
| Environmental | | | | | | | | | | |
| Operating/Storage Temperature | -40° to 60°C / -40° to 85°C | | | | | | | | | |
| Humidity | 95% relative, non-condensing | | | | | | | | | |
| Weight | ≈ 3.9 oz (111 g) | | | | | | | | | |