
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

2005, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	24	Vdc
OPERATING VOLTAGE RANGE	18 ~ 28	Vdc
TONE OUTPUT	SEE 32 TONE CHART	_
CURRENT CONSUMPTION (NOMINAL)	SEE 32 TONE CHART	mA
INGRESS PROTECTION	IP54 <u></u> ▲	_
LENS COLOR	CLEAR	_
FLASH RATE	1	PER/SECOND
CASE MATERIAL/COLOR	ABS/WHITE	_
TERMINAL	SCREW	_
OPERATING TEMPERATURE	−10 ~ +55	.c
WEIGHT	300	grams




OPTIONAL BASES
DEEP BASE: AWA-DBW

U BASE: AWA-UBW


120Vac BASE: AWA-DBW-120

NOTES:


- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.
- IP65 WITH USE OF AWA-DBW, AWA-DBW-120, OR AWA-UBW BASE.



	REVISIONS		
LTR	DESCRIPTION	DATE	APPROVED
ı	RELEASED FROM ENGINEERING	12/16/05	
Α	ADDED RoHS & BASE NOTES	5/21/07	R.W.
В	REVISED DETAIL "A" DIL SWITCH	3/12/09	B.R.

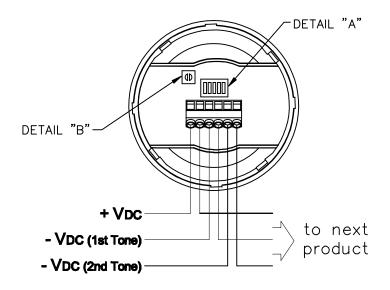

(2nd Tone overrides 1st Tone)



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERSTOLERANCES ARE ±0.5 AND ANGLES ARE ±3'.			p u	rojects® nlimited	Dayton , Oh	hio
			CIDEN (CIDADE			
APPROVALS	DATE	SIREN/STROBE				
DRAWN J.A.F.	12/05			,		
CHECKED E.P.	12/05	SIZE A		DRAWING AVW-15SE		$\frac{1}{2}$
APPROVED B.R.	12/05	А		A V W - 1551	3 W — CL —	۷-
DO NOT SCALE DRAWING		SCA	LE: N.T.S.		SHEET 1	OF

FILE NAME AVW-15SBW-CL-24.DWG