

# BBS Series

## 13/32" x 1-3/8" 600Vac Fast-acting supplemental fuses



600Vac  
1/10 to 6A



250Vac  
7 to 10A



48Vac  
12 to 30A

### Description

Fast-acting supplemental fuse.

For superior protection, Bussmann recommends upgrading to Low-Peak Class CC fuses. See data sheet # 1023.

### Catalog symbol / color code

- BBS - Black (600Vac max voltage 1/10 to 6A)
- Green (250Vac max voltage 7 to 10A)
- Purple (48Vac max voltage 12 to 30A)

### Ratings

Fuse Amp Range	Interrupting Rating at System Voltage			Agency Information	
	600 Vac	250 Vac	48 Vac	UL	CSA
1/10 to 6	10kA	-	-	X	X
7 to 10	-	10kA	-	X	X
12 to 30*	-	-	-	-	-

\* For interrupting rating, contact factory.

### Agency information

- CE
- UL Listed, Std. 248-14 (1/10-6A@600Vac, 7-10A@250Vac), Guide JDYX, File E19180
- CSA Certified, C22.2 No. 248.14 (1/10-6A@600Vac, 7-10A@250Vac), Class 1422-01, File 53787


### Catalog numbers (amps)

BBS-1/10	BBS-8/10	BBS-4	BBS-15
BBS-2/10	BBS-1	BBS-5	BBS-20
BBS-1/4	BBS-1-1/2	BBS-6	BBS-25
BBS-4/10	BBS-1-6/10	BBS-7	BBS-30
BBS-1/2	BBS-1-8/10	BBS-8	
BBS-6/10	BBS-2	BBS-10	
BBS-3/4	BBS-3	BBS-12	

### Carton quantity

Amps	Qty.
1/10 to 30	10

### Dimensions - in

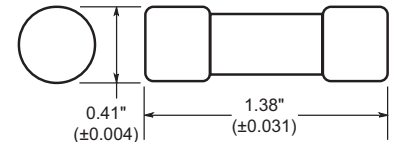

### Features

- Color coded for 600Vac (Black) 250Vac (Green) and 48Vac (Purple) for maximum voltage ratings
- Fiber tube construction
- Nickel-plated brass endcaps.

### Typical applications


- Control circuits
- Gaseous vapor fixtures
- HID ballasts
- Electronic circuits
- Hand-held meters

### Recommended fuse blocks/fuse holders

Series	Description	Data Sheet #
<b>Blocks</b>		
BMM Series	1-, 2- & 3-Pole modular blocks with optional covers	10235
BM Series	1-, 2- & 3-Pole blocks	1104
<b>DIN-Rail Holders / Switches</b>		
CHM Series	1-, 2- & 3-Pole	3185
Optima NG	3-Pole protection module	1109
Optima	3-Pole holder	1102
Optima	3-Pole holder + switch	1103
<b>Panel Mount Holders</b>		
HPF-L	1-Pole holder	2114
HPS-L	1-Pole holder	2113
<b>In-line</b>		
HEH	1-Pole holder	2124
<b>Fuseclips</b>		
1A3400, 5956 & 5960 Series	PCB Fuseclips	2132
<b>Fuse Covers</b>		
SAMI-7	Finger-safe fuse cover	1204

**Bussmann**  
by **EATON**

Time-current characteristic curves – average melt

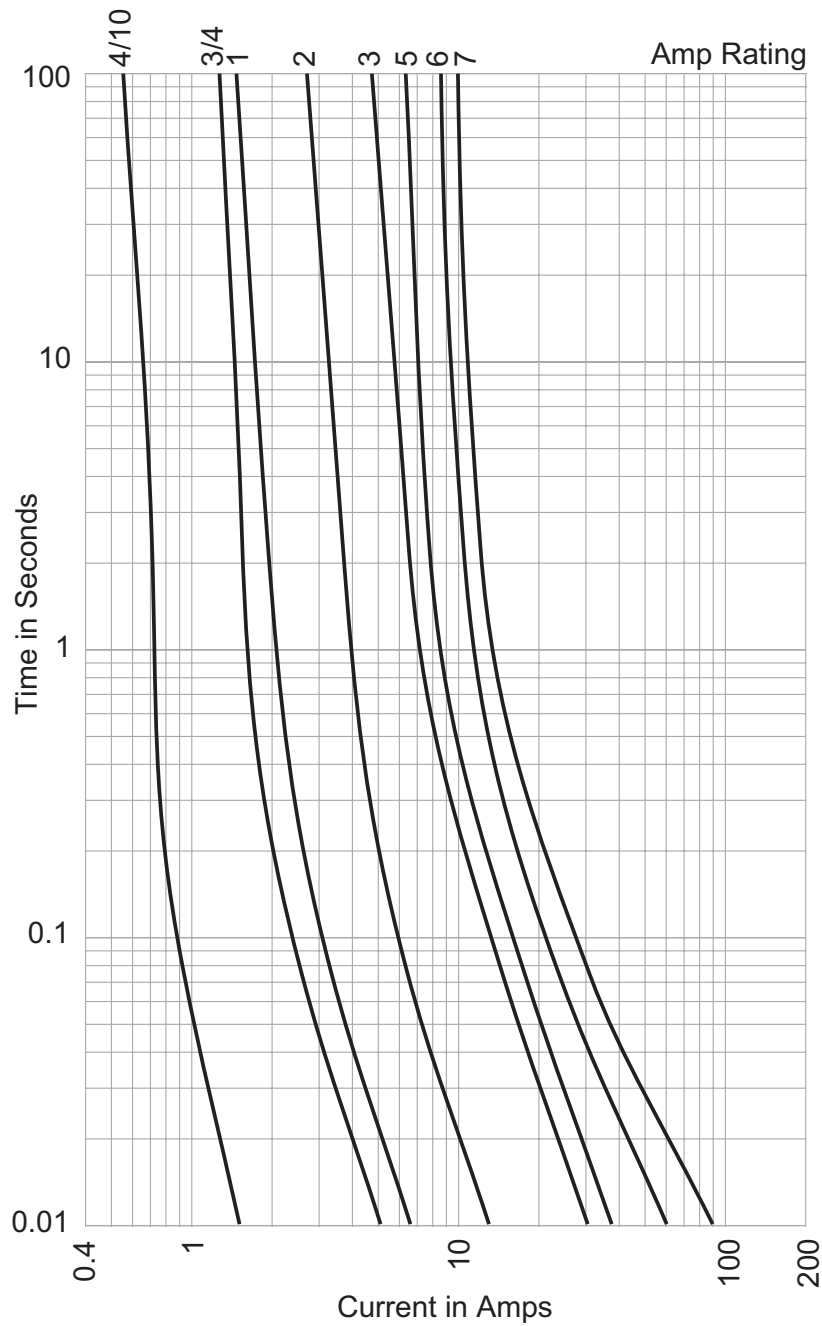

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

**Eaton's Bussmann Business**  
114 Old State Road  
Ellisville, MO 63021  
United States  
[www.Bussmann.com](http://www.Bussmann.com)



© 2014 Eaton  
All Rights Reserved  
Publication No. 2010 - BU-SB14287  
April 2014

Eaton is a registered trademark.  
All other trademarks are property  
of their respective owners.