





LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	0		C1	REVISED PER ECO-11-005027	11MAR11	RK	HMR

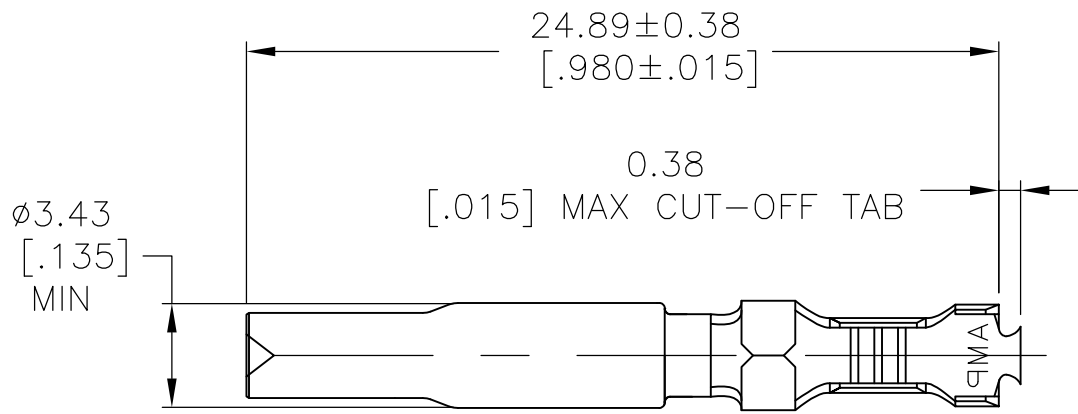


- 1


0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN-LEAD IN TIN-LEAD PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
2. WIRE RANGE: 0.2-1mm² [24-18 AWG].
INSULATION RANGE: 1.02-2.54[.040-.100] DIA.
3. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4

0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN IN TIN PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.

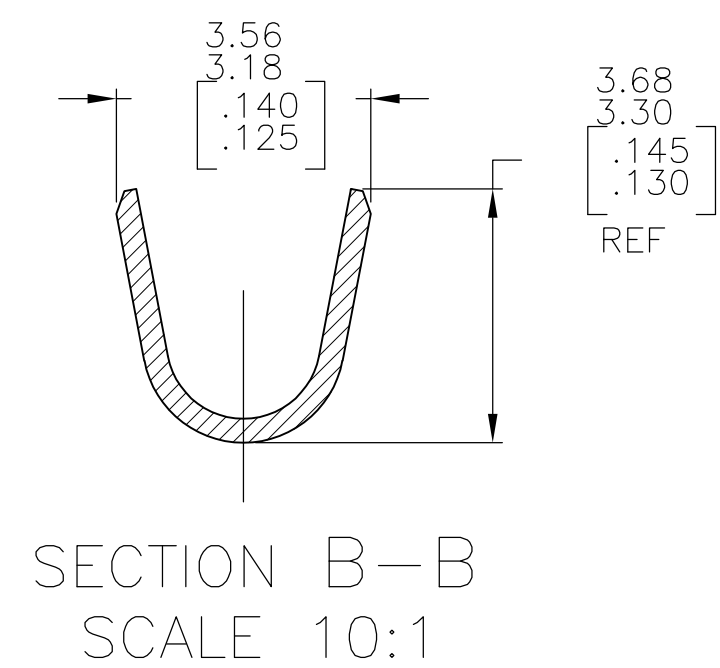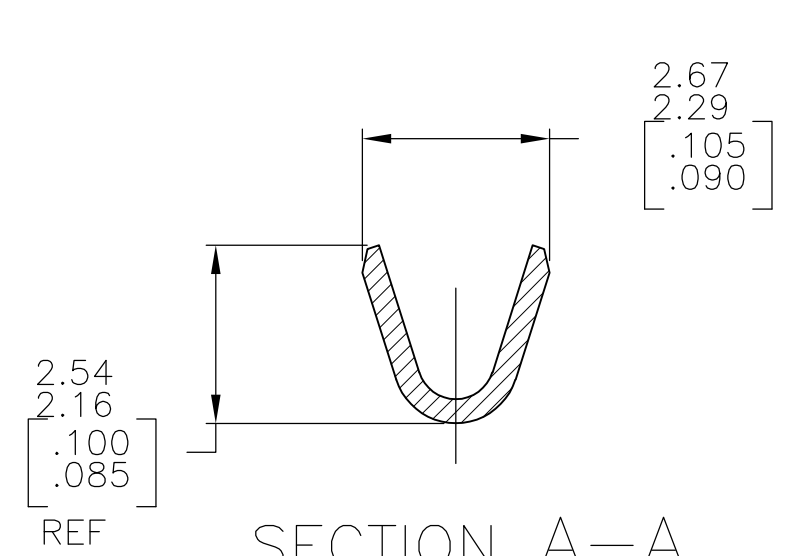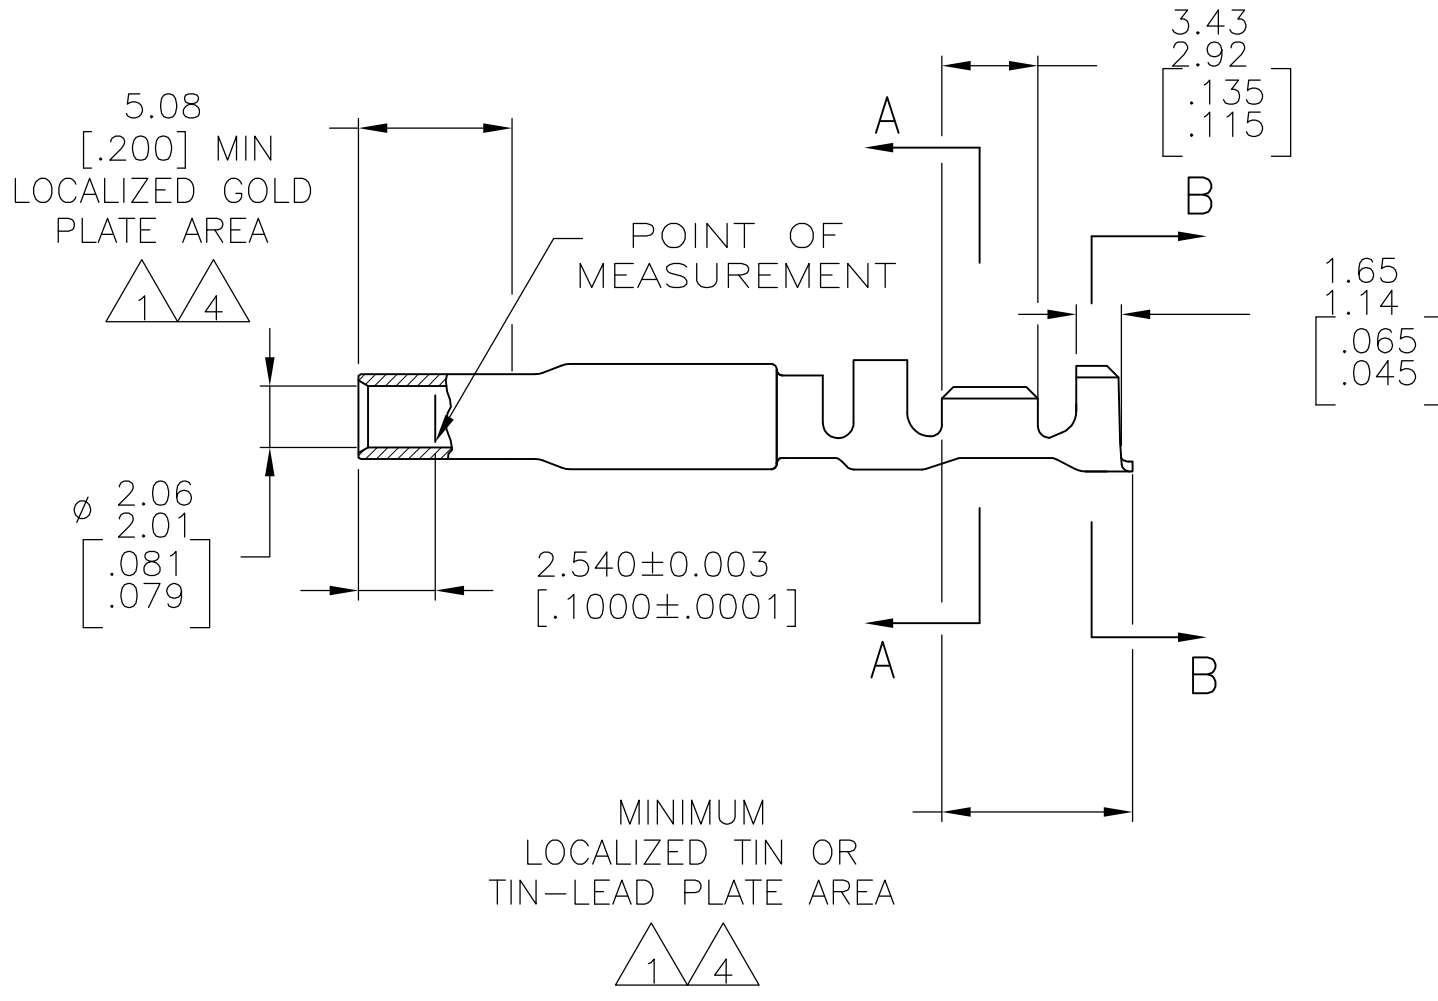

GOLD 4	0.30 [.012] PH BRZ	1-770253-0
GOLD 1	0.30 [.012] PH BRZ	770253-4
PRE-TIN	0.30 [.012] PH BRZ	770253-3
FINISH	MATERIAL	PART NO

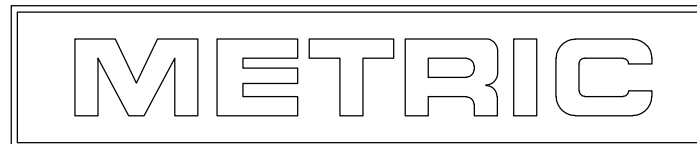

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. SALMON 20JAN93	 TE Connectivity			
		CHK R. SWING 20JAN93				
DIMENSIONS: mm [INCHES]	TOLERANCES, UNLESS OTHERWISE SPECIFIED:	APVD M. TRULL 01APR93	NAME			
	0 PLC ± -	PRODUCT SPEC	SOCKET, LOOSE PIECE, UNIVERSAL MATE-N-LOK™ II —			
	1 PLC ± -	—				
	2 PLC ± -	APPLICATION SPEC				
	3 PLC ± -	—				
4 PLC ± -	ANGLES ± -	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL	FINISH	WEIGHT —	A2	00779	C-770253	—
SEE TABLE	SEE TABLE	CUSTOMER DRAWING	SCALE 4:1	SHEET 1 of 1	REV C1	