

Chip Attenuator

Type: **EXB 14AT**
EXB 24AT



Features

- Unbalanced π type attenuator circuit in one chip
EXB14AT (0.8 mm \times 0.6 mm), EXB24AT (1.0 mm \times 1.0 mm)
- Reduced mounting area :
EXB14AT : About 60 % smaller than the area of an attenuator circuit consisting of three 0603 chip resistors, almost equal to the area of three 0402 chip resistors
EXB24AT : About 50 % smaller than the area of an attenuator circuit consisting of three 1005 chip resistors, almost equal to the area of three 0603 chip resistors
- Mounting cost reduction : (Only 1 chip placed as compared to 3)
- Attenuation : 1 dB to 10 dB
- RoHS compliant

Recommended Applications

- Attenuation / level control / impedance matching of high frequency
(communication signalling equipment cellular phones(GSM, CDMA, PDC, etc.), PHS, PDAs)


■ **As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,**
Please see Data Files

Explanation of Part Numbers


1	2	3	4	5	6	7	8	9	10	11	12
E	X	B	1	4	A	T	3	A	R	3	X
Product Code Thick Film Resistor Network			Code 14AT	Dimensions and Circuit Configuration 0.8 mm × 0.6 mm (inch size : 0302) π type attenuator		Attenuation Value One-digit number /one letter shows attenuation value (ex.) 1→1 dB, A→10 dB		Tolerance R3 ±0.3 dB R5 ±0.5 dB		Packaging X Punched Carrier Taping 2 mm pitch, 10,000 pcs.	
			24AT	1.0 mm × 1.0 mm (inch size : 0404) π type attenuator				Characteristics Impedance A 50 Ω			

Attenuation-Frequency Characteristics

(EXB14AT, EXB24AT)

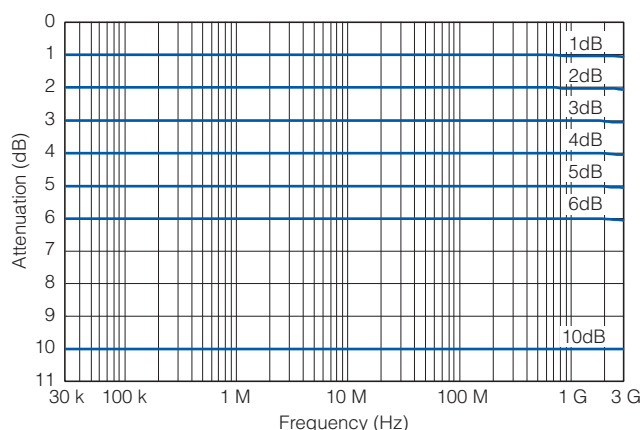


Circuit Configuration

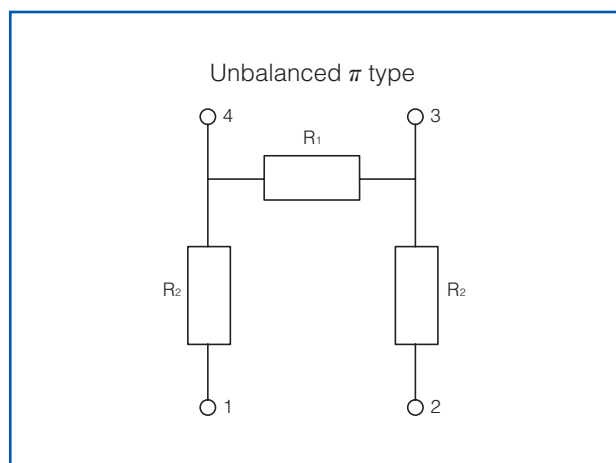


Construction

EXB14AT

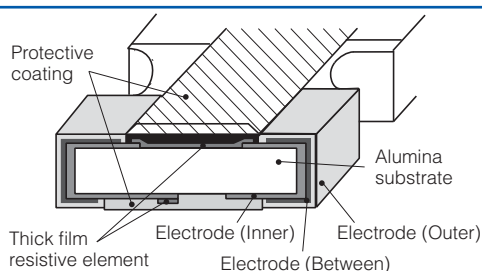


EXB24AT

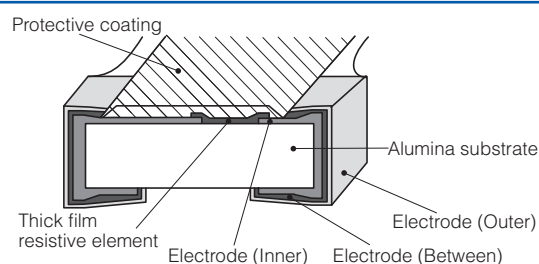

Dimensions in mm (not to scale)

EXB14AT

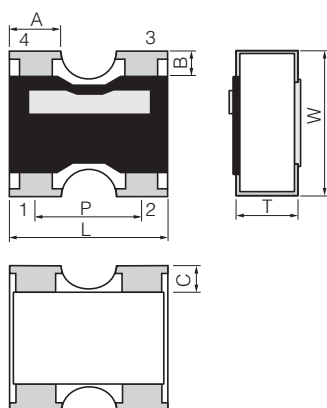


Dimensions (mm)	L	W	T	A	B	C	P (typical value)
	0.80 ± 0.10	0.60 ± 0.10	0.35 ± 0.10	0.35 ± 0.10	0.15 ± 0.10	0.15 ± 0.10	0.50

<Marking Configuration>

The bar marking for recognizing terminal direction is located on the side of terminal 3, 4.

Mass (Weight) [1000 pcs.] : 0.7 g

EXB24AT

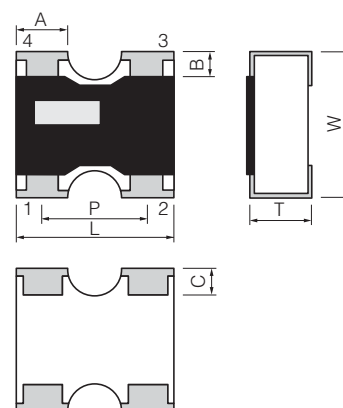

Dimensions (mm)	L	W	T	A	B	C	P (typical value)
	1.00 ± 0.10	1.00 ± 0.10	0.35 ± 0.10	0.40 ± 0.10	0.15 ± 0.10	0.25 ± 0.10	0.65

<Marking Configuration>

The bar marking for recognizing terminal direction is located on the side of terminal 4.

Mass (Weight) [1000 pcs.] : 1.1 g


Ratings

Part No.	EXB14AT, EXB24AT
Attenuation Value	1 dB, 2 dB, 3 dB, 4 dB, 5 dB, 6 dB, 10 dB*
Attenuation Value Tolerance	1 dB, 2 dB, 3 dB, 4 dB, 5 dB : ± 0.3 dB 6 dB, 10 dB : ± 0.5 dB
Characteristic Impedance	50 Ω
Power Rating	0.04 W /package
Frequency Range at 70 °C	DC to 3.0 GHz
VSWR (Voltage Standing Wave Ratio)	1.3 max.
Number of Resistors	3 resistors
Number of Terminals	4 terminals
Category Temperature Range	-55 °C to +125 °C

* Please inquire about the other Attenuator value

Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

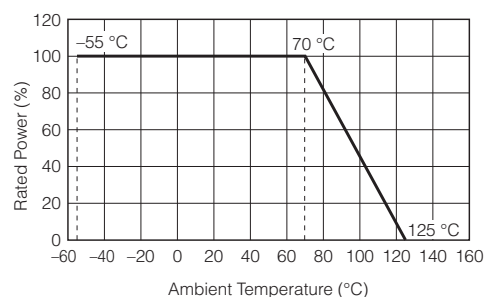

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[EXB-24AT0AR3X](#)