

SPECIFICATION CONTROL DRAWING

55PC6123

TITLE

ONE CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT

Date 1-23-98


Revision

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT WIRE - 55PC0114

SHIELD - SILVER-COATED COPPER

JACKET - RADIATION-CROSSLINKED,
MODIFIED ETFE

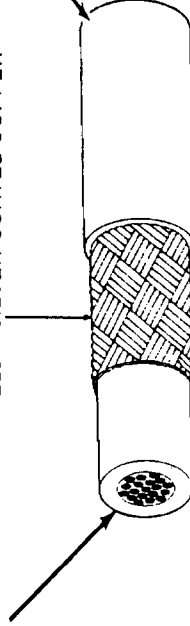

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)		WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE
55PC6123-26-*	26	38	.0050	.0060	.056	.060	.064	4.00
55PC6123-24-*	24	38	.0050	.0060	.061	.065	.069	4.86
55PC6123-22-*	22	38	.0050	.0060	.068	.071	.074	6.13
55PC6123-20-*	20	38	.0050	.0060	.075	.079	.083	8.07
55PC6123-18-*	18	38	.0050	.0060	.085	.088	.092	10.82
55PC6123-16-*	16	38	.0050	.0060	.092	.096	.100	13.03
								13.46

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1000 volts (rms), 60 Hz, 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)
VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers above shall be replaced
by a color code designator with a dash separating
the component wire color from the jacket color.

Example: AWG 22, white component wire,

white jacket: 55PC6123-22-9-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55PC6123-20-9-9CS3296](#) [55PC6123-24-9-9](#) [55PC6123-22-9-9CS3296](#)