CEDM8004

SURFACE MOUNT SILICON P-CHANNEL ENHANCEMENT-MODE MOSFET



Top View Bottom View

SOT-883L CASE

www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CEDM8004 is an enhancement-mode P-Channel MOSFET, manufactured by the P-Channel DMOS process, designed for high speed pulsed amplifier and driver applications. This MOSFET offers low $r_{DS(on)}$ and low threshold voltage.

MARKING CODE: V

COMPLEMENTARY N-CHANNEL: CEDM7004

FEATURES:
- ESD protection up to 2kV
- 0.4mm low package profile
- Low $r_{DS(ON)}$
- Low threshold voltage
- Logic level compatible
- Small leadless surface mount package

APPLICATIONS:
- Load/Power switches
- Power supply converter circuits
- Battery powered portable devices

MAXIMUM RATING: (T_A=25°C)	**SYMBOL**		**UNITS**
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	8.0	V
Continuous Drain Current	I_D	450	mA
Power Dissipation	P_D	100	mW
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150	°C

ELECTRICAL CHARACTERISTICS: (T_A=25°C unless otherwise noted)

SYMBOL	**TEST CONDITIONS**	**MIN**	**TYP**	**MAX**	**UNITS**
I_{GSSF}, I_{GSSR}	V_{GS}=8.0V, V_{DS}=0			3.0	μA
I_{DSS}	V_{DS}=30V, V_{GS}=0			1.0	μA
BV_{DSS}	V_{GS}=0, I_D=100μA	30			V
$V_{GS(th)}$	V_{DS}=V_{GS}, I_D=250μA	0.5		1.0	V
V_{SD}	V_{GS}=0, I_S=100mA			1.1	V
$r_{DS(ON)}$	V_{GS}=4.5V, I_D=430mA		1.0	1.1	Ω
$r_{DS(ON)}$	V_{GS}=2.5V, I_D=200mA		1.6	2.0	Ω
$r_{DS(ON)}$	V_{GS}=1.8V, I_D=100mA		2.6	3.3	Ω
g_{FS}	V_{DS} =10V, I_D=100mA	200			mS
C_{rss}	V_{DS}=25V, V_{GS}=0, f=1.0MHz		8.9	10	pF
C_{iss}	V_{DS}=25V, V_{GS}=0, f=1.0MHz		45	55	pF
C_{oss}	V_{DS}=25V, V_{GS}=0, f=1.0MHz		8.5	15	pF
$Q_{g(tot)}$	V_{DS}=10V, V_{GS}=4.5V, I_D=1.0A		0.88		nC
Q_{gs}	V_{DS}=10V, V_{GS}=4.5V, I_D=1.0A		0.35		nC
Q_{gd}	V_{DS}=10V, V_{GS}=4.5V, I_D=1.0A		0.128		nC

CEDM8004

SURFACE MOUNT SILICON P-CHANNEL ENHANCEMENT-MODE MOSFET

SOT-883L CASE - MECHANICAL OUTLINE

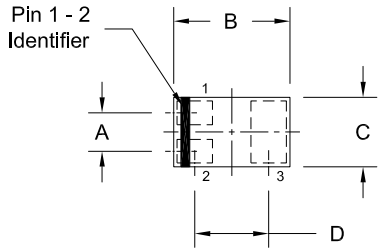

TOP VIEW



SIDE VIEW

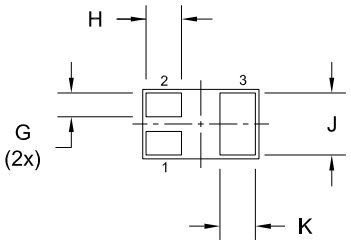

BOTTOM VIEW R2

DIMENSIONS				
	INCHES		MILLIMETERS	
SYMBOL	MIN	MAX	MIN	MAX
A	0.014		0.35	
B	0.037	0.041	0.95	1.05
C	0.022	0.026	0.55	0.65
D	0.026		0.65	
E	0.000	0.002	0.00	0.05
F	0.012	0.016	0.30	0.40
G	0.005	0.007	0.13	0.18
H	0.008	0.012	0.20	0.30
J	0.018	0.022	0.45	0.55
K	0.008	0.012	0.20	0.30

SOT-883L (REV:R2)

PIN CONFIGURATION
(Bottom View)



LEAD CODE:
1) Gate
2) Source
3) Drain

MARKING CODE: V

Package Type Options (all dimensions are maximum - in mm)

Package	Length	Width	Height	P_D (mW)	Central Item Number
SOT-883L	**1.05**	**0.65**	**0.40**	**100**	**CEDM8004**
SOT-883VL	1.05	0.65	0.32	100	CEDM8004VL
SOT-523	1.70	1.70	0.78	250	CMUDM8004

CEDM8004

SURFACE MOUNT SILICON P-CHANNEL ENHANCEMENT-MODE MOSFET

TYPICAL ELECTRICAL CHARACTERISTICS

Output Characteristics

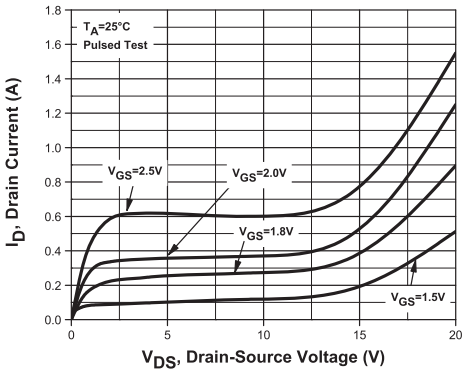

Transfer Characteristics

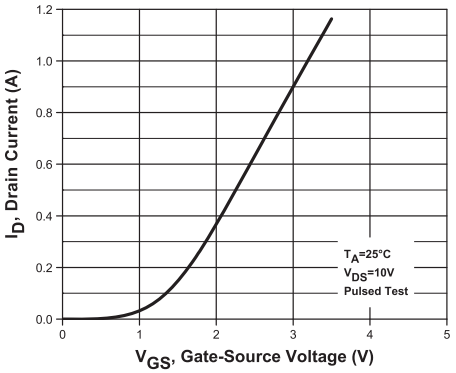

Drain Source On Resistance

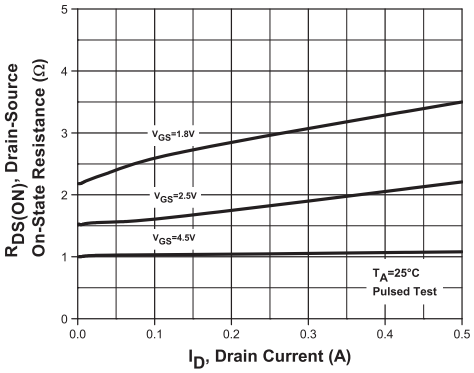

Capacitance

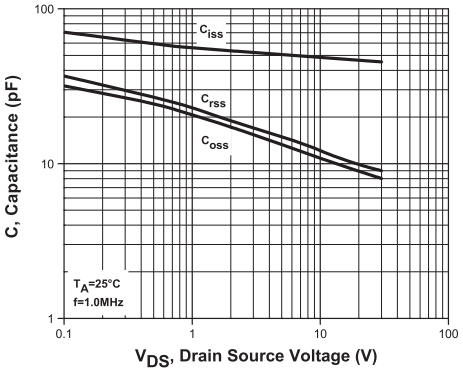

Normalized Power Derating

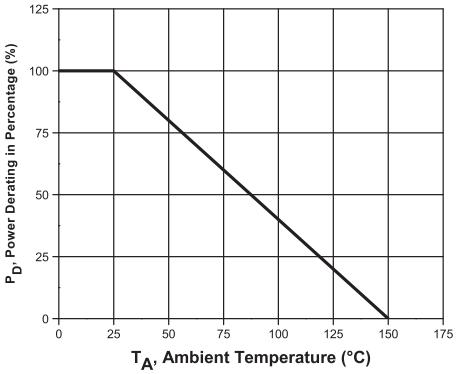

OUTSTANDING SUPPORT AND SUPERIOR SERVICES

PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centralsemi.com

Worldwide Field Representatives:
www.centralsemi.com/wwreps

Worldwide Distributors:
www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms