



### Main

|                                    |                               |
|------------------------------------|-------------------------------|
| Range of product                   | Harmony XVU                   |
| Product or component type          | Modular tower light           |
| Accessory / separate part type     | Mounting plate                |
| Accessory / separate part category | Mounting and fixing accessory |
| Component name                     | XVU                           |
| Mounting diameter                  | 2.36 in (60 mm)               |

### Complementary

|                           |                                                                                                                                         |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Pin number                | 2                                                                                                                                       |
| Mounting support          | Direct mounting                                                                                                                         |
| Product compatibility     | Top: AC body<br>Top: DC body<br>Top: swivel mounting support                                                                            |
| Material                  | ABS (acrylonitrile butadiene-styrene)<br>PC (polycarbonate)<br>PBT (polybutylene terephthalate) V-0 flame retardant conforming to UL 94 |
| Housing colour            | Black                                                                                                                                   |
| Connections - terminals   | Push-in                                                                                                                                 |
| [Us] rated supply voltage | 110...240 V AC<br>24 V AC/DC                                                                                                            |
| Length                    | 0.67 in (17 mm)                                                                                                                         |
| Product weight            | 0.13 lb(US) (0.06 kg)                                                                                                                   |

### Environment


|                                       |                            |
|---------------------------------------|----------------------------|
| ambient air temperature for storage   | -40...158 °F (-40...70 °C) |
| ambient air temperature for operation | -13...122 °F (-25...50 °C) |
| IP degree of protection               | IP65                       |
| product certifications                | CE<br>CSA<br>UL            |

### Offer Sustainability


|                                                                                                                                  |                                                                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Green Premium product                                                                                                            | Green Premium product                                                                                                            |
| Compliant - since 1529 - Schneider Electric declaration of conformity                                                            | Compliant - since 1529 - Schneider Electric declaration of conformity                                                            |
| Reference not containing SVHC above the threshold                                                                                | Reference not containing SVHC above the threshold                                                                                |
| Available                                                                                                                        | Available                                                                                                                        |
| Available                                                                                                                        | Available                                                                                                                        |
| WARNING: This product can expose you to chemicals including:                                                                     | WARNING: This product can expose you to chemicals including:                                                                     |
| Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. | Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                                    | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                                    |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Dimensions Drawings




Modular Tower Lights Mounting

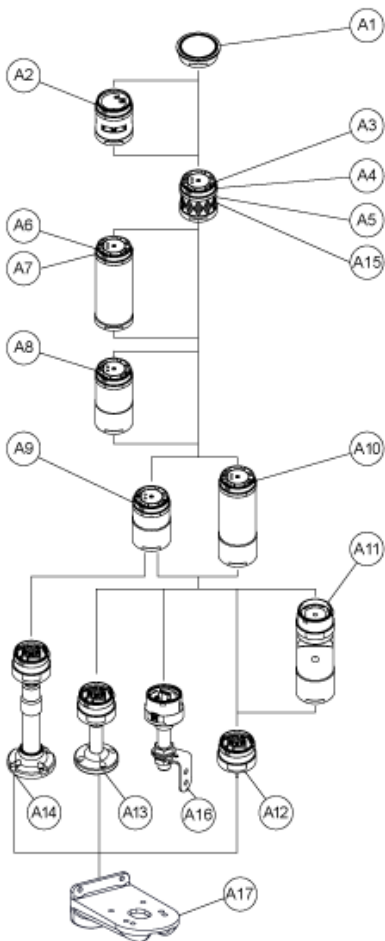

| Drawing | Part number | Part name            |
|---------|-------------|----------------------|
| A1      | -           | Top cover            |
|         | -           | Top cover (Silver)   |
| A2      | XVUC9S      | Buzzer unit          |
|         | XVUC9SQ     | Buzzer unit (Silver) |
| A3      | XVUC23      | Green LED unit       |
|         | XVUC24      | Red LED unit         |
|         | XVUC25      | Orange LED unit      |
|         | XVUC26      | Blue LED unit        |
|         | XVUC27      | White LED unit       |
|         | XVUC28      | Yellow LED unit      |
| A4      | XVUC29      | Multi-LED unit       |

|     |           |                                                       |
|-----|-----------|-------------------------------------------------------|
| A5  | XVUC29P   | Multi-LED unit, Pulse signal                          |
| A6  | XVUC9V    | Sound unit                                            |
| A7  | XVUC9VP   | Sound unit, Pulse signal                              |
| A8  | XVUC020   | Extender                                              |
|     | XVUC020Q  | Extender (Silver)                                     |
| A9  | XVUC21B   | DC body                                               |
|     | XVUC21BQ  | DC body (Silver)                                      |
| A10 | XVUC21M   | AC body NPN                                           |
|     | XVUC21MP  | AC body PNP                                           |
|     | XVUC21MQP | AC body PNP (Silver)                                  |
| A11 | XVUZ06    | Flexible option                                       |
| A12 | XVUZ01    | Fixing Unit - Direct mounting (3 pins)                |
|     | XVUZ01Q   | Fixing Unit - Direct mounting (Silver,3 pins)         |
|     | XVUZ03    | Fixing Unit - Direct mounting (2 pins)                |
|     | XVUZ04    | Fixing Unit - Direct mounting (4 pins)                |
| A13 | XVUZ02    | Fixing Unit - Plate with Pole (100 mm)                |
|     | XVUZ02Q   | Fixing Unit - Plate with Pole (100 mm, Silver)        |
|     | XVUZ400   | Fixing Unit - Plate with Pole (400 mm)                |
|     | XVUZ800   | Fixing Unit - Plate with Pole (800 mm)                |
| A14 | XVUZ05    | Fixing Unit - Plate with adjustment pole (100-385 mm) |
| A15 | XVUC43    | Green LED unit, Flash                                 |
|     | XVUC44    | Red LED unit, Flash                                   |
|     | XVUC45    | Orange LED unit, Flash                                |
|     | XVUC46    | Blue LED unit, Flash                                  |
|     | XVUC47    | White LED unit, Flash                                 |
|     | XVUC48    | Yellow LED unit, Flash                                |
| A16 | XVUZ100T  | Fixing Unit - Metal bracket with pole (100 mm)        |
|     | XVUZ250T  | Fixing Unit - Metal bracket with pole(250 mm)         |
|     | XVUZ400T  | Fixing Unit - Metal bracket with pole (400 mm)        |
| A17 | XVUZ12    | Fixing plate for use on vertical support - black      |


## Modular Tower Lights Mounting

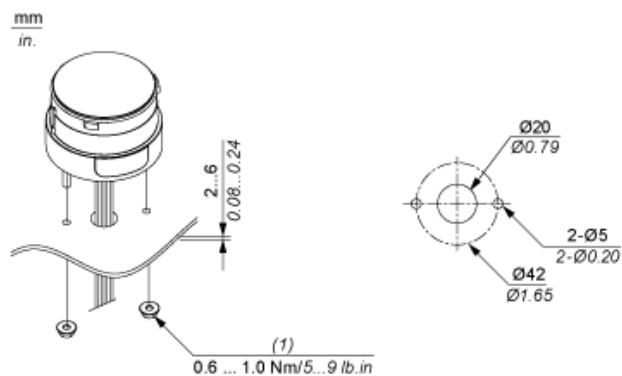


(1) M4 Nut x 3 (attached)

## Flexible Option Mounting

### Recommended Mounting



### No Recommended Mounting



## Illuminated Units, Multi-LED and Audible Units Wiring

