
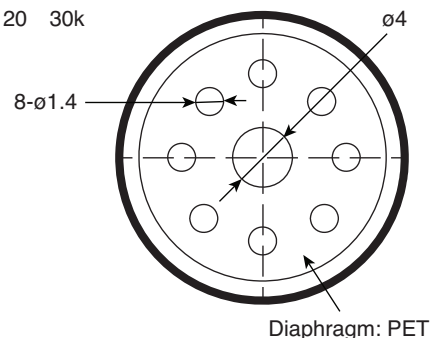
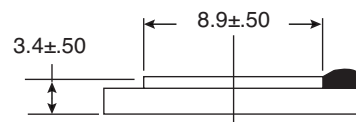
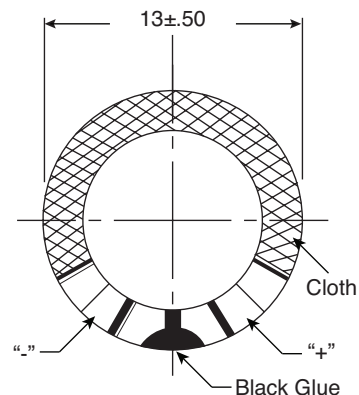


Part Number:

254-DS136-RO

Frequency Response Curve

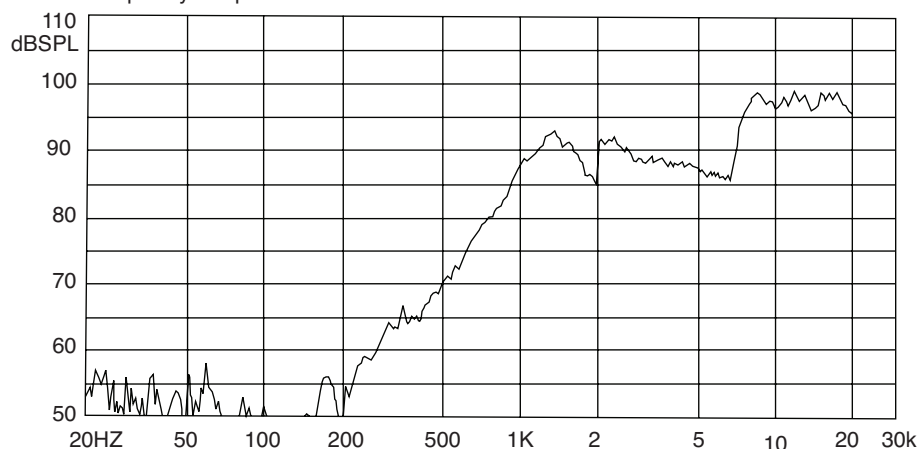

KT-400534

Electrical Specifications:

- Rated Input Power: 0.5W
- Max. Input Power: 1.0W for 1min.
- Impedance: $16\Omega \pm 15\%$ at 1KHz 1V
- Resonant Frequency (Fo): $1300\text{Hz} \pm 20\%$ at Fo
- Frequency Range: Fo - 20KHz
- Sound Pressure Level: 90dB (0.5W/0.1M) $\pm 3\text{dB}$

Mechanical Specifications:

- Operating Temperature: -20°C to $+60^{\circ}\text{C}$
- Storage Temperature: -30°C to $+70^{\circ}\text{C}$

Materials:

- Magnet: Nd-Fe-B

Soldering Specifications:

- Recommend using constant searing-iron
- Temperature Range: $360 \pm 5^{\circ}\text{C}$ for 2 seconds

Note:

- RoHS Compliant